

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







EK-27404-000


SHT I.I

NOTE

I. INCREASED PRESSURE AT THE SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.

2

LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED TO ± 0 ,17 [.007].

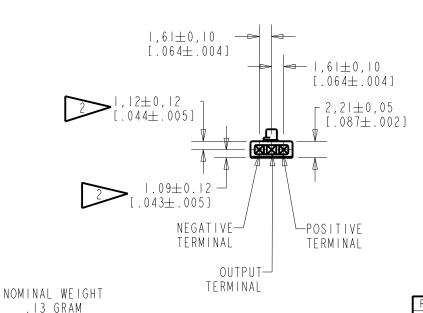

 $1.98 \pm 0.05 -$

 $[.078 \pm .002]$

→ 2.77±0.05

5,56±0,02 [.219±.001]

 $[.109\pm.002]$

 -3.99 ± 0.02

 $[.157\pm.001]$

0.48[.019]
MINIMUM STRAIGHT

0.64

0.64

0.64

0.64

0.625]


MAXIMUM

SOLDER BUILDUP

DIMENSIONS IN MILLIMETERS [INCHES]

KNOWLES ELECTRONIC	S
ITASCA, ILLINOIS U.S.A.	

Revision	C.O. #	Implementation Do	ate	RELEASE LE	REVISION	
B A	M10105324 M10100730	2-12-14 7-25-05		Activ	В	
SCALE:	2:1					DATE
DO NOT SCALE DRAWING						7 - 25 - 05 DATE
TITLE:	MICROPHONE			EK-27404-000	GJP APP. BY	7 - 29 - 05 DATE
	OUTLINE DRAWING			SHT I.I	G J P	7 - 29 - 05 Rev: B

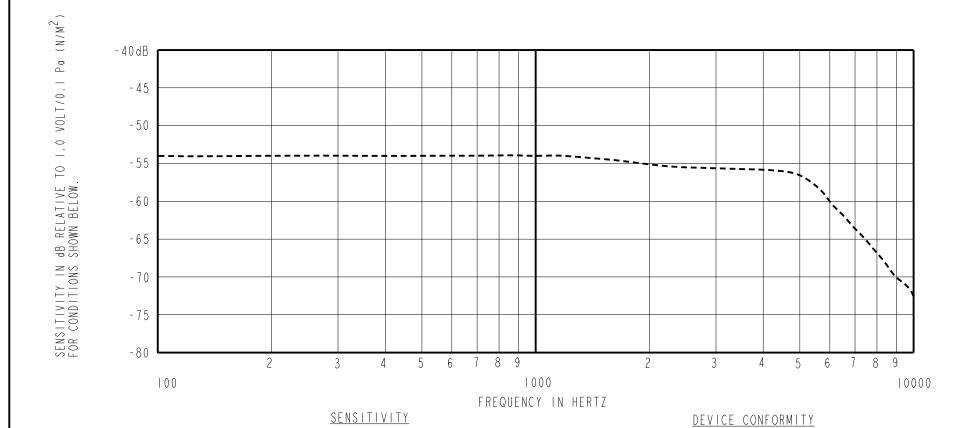

NOTES:

FREQUENCY

4000-6000

100

1000

I. CASE CONNECTED TO NEGATIVE TERMINAL.

MIN.

- - -

-54.0

- 2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 3. CONFORMS TO REQUIREMENTS SHOWN ON 'ELECTRET MICROPHONE ENVIRONMENTAL QUALIFICATIONS TEST, EK-PA SHEET 2.2' WITH REF. FREQ. OF 1000 Hz.

MAX.

- - -

-52.0

4. TYPICAL SENSITIVITY TO HUMIDITY AT 1000 Hz IS 0.02 dB/%RH.

NOM.

-54.0

-54.0

- 56.5

5. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.

DC		AMPLIFIER	SENSITIVITY CHANGE ON REDUCING SUPPLY	"A" WEIGHTED NOISE	OUTPUT IMPEDANCE OHMS		
ŞI	JPPLY	CURRENT DRAIN	TO 0.9VDC	(I kHz EQUIV. SPL)	MIN.	NOM.	MAX.
	I.3V	50 μA MAX.	3 dB MAX.	26.0 dB MAX.	2800	4400	6800

Kevision	C.O. #	Implementation Date	KELEASE LEVEL	KEA1210N
В	MI0105324	2-12-14	l Active I	l K
А	MI0100730	7 - 25 - 05		

RANGE OF DEVIATION FROM IKHZ

+ | . 0

0.0

+0.5

-1.0

0.0

-5.0

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION DR. BY CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR AB 7-25-05 CK. BY DATE

TITLE: MICROPHONE EK-27404-000 GJP 7-29-05 APP. BY DATE

SHT 2.1

GJP

7-29-05

PERFORMANCE SPECIFICATION