



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



EKI-2711HPI

IEEE 802.3af/at Gigabit 60W PoE+ Injector with Wide Temperature



Features

- Supports 10/100/1000Base-T (X) for PoE+ OUT and Data IN
- IEEE 802.3af/at compliant
- Power input 48 V_{DC}, Inject power up to 60W
- Provides slim size and DIN-rail/Wall mount with IP31 metal mechanism
- Supports operating temperatures from -40 to 75°C

Introduction

With the technology of PoE (Power over Ethernet), we can transfer both data and electrical power to Ethernet-enabled devices using a standard CAT5 cable. EKI-2711HPI is compliant IEEE 802.3af/at and inject up to 60W for PD device. This product can operate in a wide range of Temp. between -40 to 75°C.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3af/at, 802.3ab
- **LAN** 10/100/1000Base-T (X)
- **Transmission Distance** Ethernet: Up to 100 m
- **Transmission Speed** Up to 1000 Mbps

Interface

- **Connectors** PoE OUT: RJ45
DATA IN: RJ45
2-pin removable screw terminal
- **LED Indicators** PWR, PoE Status, Link/Activity

Power

- **Power Consumption** Max. 63.5 W (Full load PoE+)
- **Power Input** 48 V_{DC} (Single input)
- **Power Output** 60W

Mechanism

- **Dimensions (W x H x D)** 36.7 x 108.4 x 103.5 mm (1.44" x 4.27" x 4.07")
- **Enclosure** IP31, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

Protection

- **Power Reverse** Present
- **Overload current** Present

Environment


- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 730,337 hours

Certification

- **Safety** UL/cUL 508 Class I, Division 2, Groups A, B, C and D
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

Dimensions

Unit: mm [inch]

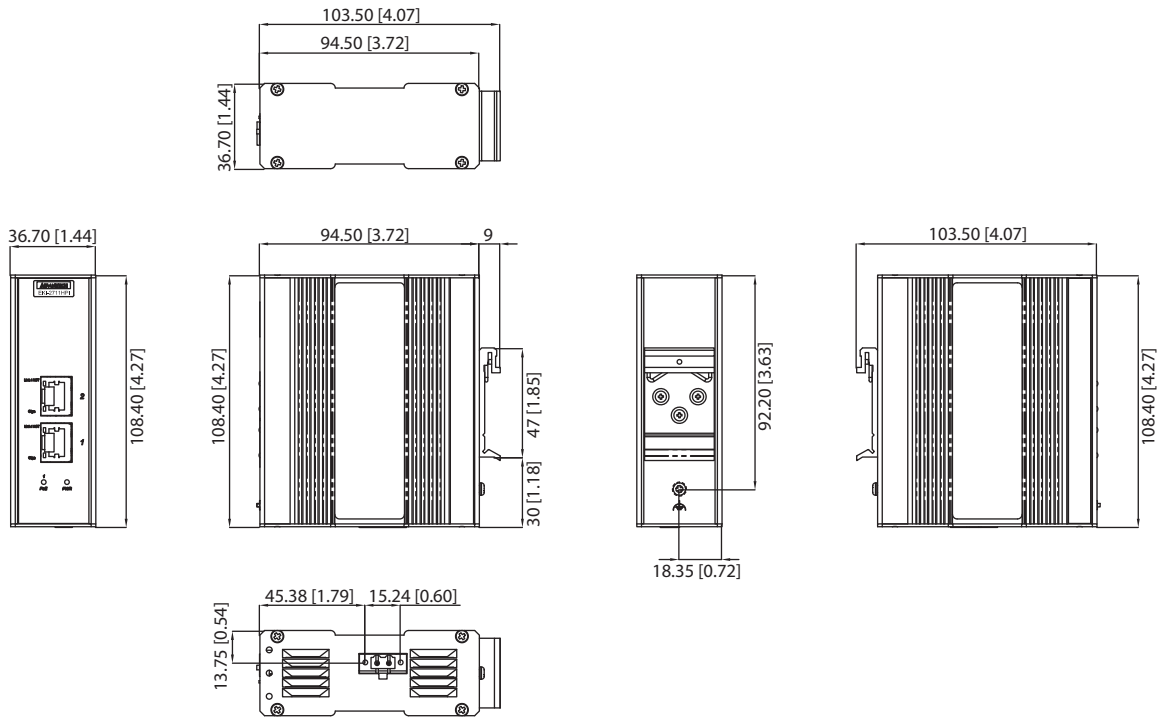

Panel Cut-out Dimensions: 36.7 x 108.4 x 103.5 mm (1.44" x 4.27" x 4.07")

Ordering Information

- EKI-2711HPI PoE+ Injector, support power up to 60W