



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# EKI-2728M/MI

# EKI-2728S/SI

## 6G+2G Multi-Mode SC Fiber Port Unmanaged Ethernet Switch

## 6G+2G Single-Mode SC Fiber Port Unmanaged Ethernet Switch



### Features

- Provides 6 x 10/100/1000 Mbps Ethernet port with RJ45 connector
- Provides 2 x 1000 Mbps fiber port with SC type connector for 1000Base-SX/LX device
- Supports MDI/MDI-X auto crossover
- Supports Auto-Negotiation
- Supports redundant 12 ~ 48 V<sub>DC</sub> and 24V<sub>AC</sub> power input
- Provides flexible mounting: DIN-rail and Wall mount
- Provides Link Fault Pass-through (LFP)
- Jumbo Frame: 9216 bytes

### Introduction

EKI-2728M/2728S are cost effective unmanaged industrial Ethernet switch which supports Giga Ethernet. It supports Green Power requirement, furthermore, EKI-2728M/2728S also supports advanced network standards to optimize network performance, reduce maintenance cost, and secure network safety.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3ab, 802.3x, IEEE 802.3z
- **LAN** 10/100/1000Base-T (X), 1000Base-SX or 1000Base-LX
- **Transmission Distance** Ethernet: Up to 100 m  
Fiber:  
Multi-mode: Up to 550 m (EKI-2728M/MI)  
Single-mode: Up to 10 km (EKI-2728S/SI)
- **Transmission Speed** Up to 1000 Mbps
- **Optical Fiber** Multi-mode (EKI-2728M/MI)  
Wavelength: 850 nm  
Tx Power: -4/-9.5 dBm  
Rx Sensitivity: -18 dBm  
Parameters: 50/125 um, 62.5/125 um  
Single-mode (EKI-2728S/SI)  
Wavelength: 1310 nm  
Tx Power: -3/-9.5 dBm  
Rx Sensitivity: -20 dBm  
Parameters: 9/125 um

#### Interface

- **Connectors** 6 x RJ45  
2 x SC type fiber connector  
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail  
Fiber: LNK/ACT  
Ethernet: 1000M, LNK/ACT

#### Power

- **Power Consumption** 7W
- **Power Input** 12 ~ 48 V<sub>DC</sub>, 24 V<sub>AC</sub> (18 ~ 30 V<sub>AC</sub>), redundant dual inputs

#### Mechanism

- **Dimensions (W x H x D)** 59.6 x 152 x 105 mm (2.35" x 5.98" x 4.13")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

#### Protection

- **Power Reverse** Present
- **Overload current** Present

#### Environment


- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)  
Wide Temp Model  
-40 ~ 75°C (-40 ~ 167°F) / (I model)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** TBD

#### Certification

- **EMI** CE, FCC Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

## Dimensions

Unit: mm [inch]

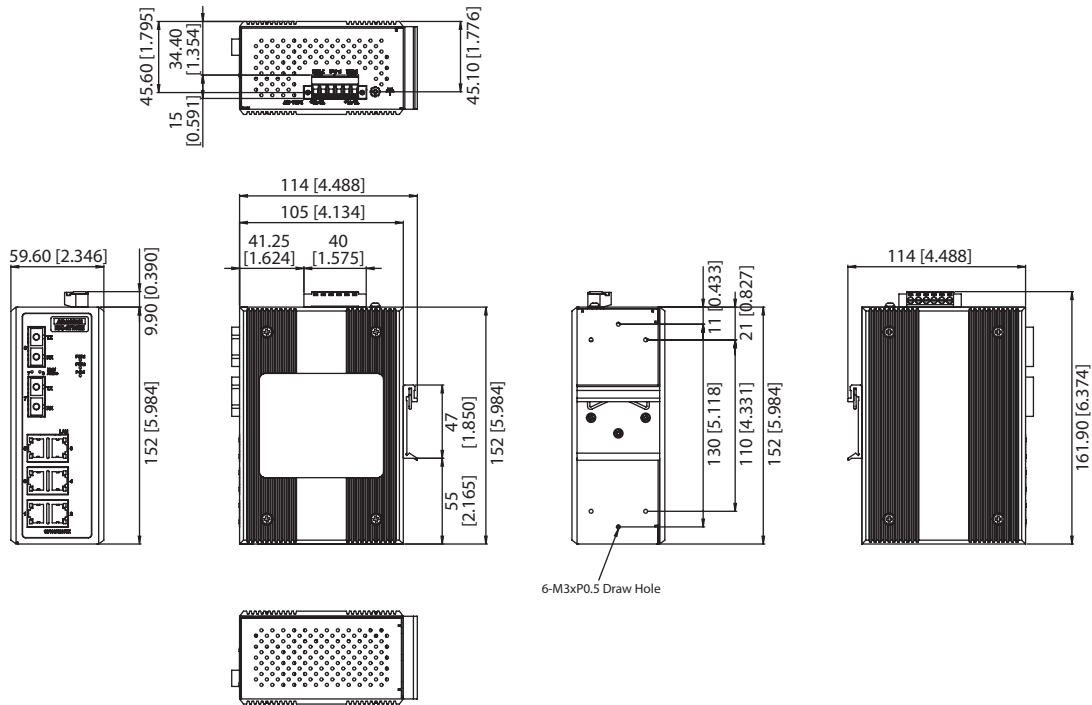

**Panel Cut-out Dimensions: 59.6 x 152 x 105 mm (2.35" x 5.98" x 4.13")**

## Ordering Information

- **EKI-2728M-BE** 6G+2G Multi-mode SC Fiber Unmanaged Ethernet Switch
- **EKI-2728MI-BE** 6G+2G Multi-mode SC Fiber Unmanaged Ethernet Switch w/ Wide Temp
- **EKI-2728S-AE** 6G+2G Single-mode SC Fiber Unmanaged Ethernet Switch
- **EKI-2728SI-AE** 6G+2G Single-mode SC Fiber Unmanaged Ethernet Switch w/ Wide Temp