



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



EKI-3525M

EKI-3525S

4-port 10/100Mbps + 1-port 100FX Multi-mode Unmanaged Industrial Ethernet Switch

4-port 10/100Mbps + 1-port 100FX Single-mode Unmanaged Industrial Ethernet Switch

NEW



EKI-3525M

EKI-3525S



Features

- Supports IEEE 802.3az, Energy Efficient Ethernet standard
 - Automatically powers down ports that have no link
 - Budgets power output for different Ethernet cable length
- Support IEEE 802.1p QoS- VIP port setting
 - Ensures time sensitive data gets delivered efficiently, even during bursts of high data traffic. -Ensures video streaming through switch with high priority.
- Supports redundant 12 ~ 48 V_{DC} power input and P-Fail relay
- In Loop detection
- Provides 1 x 100 Mbps Multi/Single-mode SC type fiber optic port (EKI-3525M/S)
- Provides broadcast storm protection
- Provides flexible mounting: DIN-rail and flat wall mounting

Introduction

The EKI-3525M/S are a new generation of products and have four 10/100 Mbps Ethernet ports, and one multi-mode or single-mode fiber-optic port. Using fiber-optics, you can prevent noise from interfering with your system and support high-speed (100 Mbps) and high-distance (up to 30 km) transmissions. A low power Ethernet design automatically adjusts power consumption by detecting the link status and cable length. Designed with one "VIP" port to get optimal bandwidth for media traffic through the VIP port users can experience better multimedia streaming performance through the prioritized bandwidth setting. The devices come with compact metal and plastic housing that is IP40 rated to protect against dusty industrial environments. The wide power input power (8.4 to 52.8 V_{DC}) is dedicated to operating in areas of unstable power and rugged environments. It also provides an event alarm and in the event of a power failure and connection loop, the integrated LED will activate the alarm to notify administrators.

Specifications

Communications

- Standard** IEEE 802.3, 802.3u, 802.3x, 802.1p, 802.3az
- LAN** 10/100Base-T(X), 100Base-FX
- Transmission Distance** Ethernet: Up to 100 m
Multi-mode Fiber: Up to 2 km (EKI-3525M)
Single-mode Fiber: Up to 30 km (EKI-3525S)
- Transmission Speed** Up to 100 Mbps
- Optical Fiber** Multi-Mode (EKI-3525M)
Wavelength: 1310nm
Tx Power: -14/-20 dBm
Rx Sensitivity: -31 dBm
Parameters: 50/125 um, 62.5/125 um
Single-Mode (EKI-3525S)
Wavelength: 1310 nm
Tx Power: -8/-15 dBm
Rx Sensitivity: -34 dBm
Parameters: 9/125 um

Interface

- Connectors** 4 x RJ45 ports, 1 x SC type fiber connector
6-pin removable screw terminal (power & relay)
- LED Indicators** P1, P2, P-Fail, Loop detection
10/100T (X): Link/Activity, Speed

Switch Properties

- MAC Table Size** 2K
- Packet Buffer Size** 384K bit
- Switch Fabric Speed** 1.0Gbps

Power

- Power Consumption** Max. 2.1 W
- Power Input** 12 ~ 48 V_{DC} (8.4 ~ 52.8 V_{DC}) redundant dual inputs
- Fault Output** 1 Relay Output

Mechanism

- Dimensions (W x H x D)** 28.5 x 120 x 85.3 mm (1.02" x 4.73" x 3.35")
- Enclosure** IP40, plastic and metal shell with solid mounting kits
- Mounting** DIN-rail, Wall

Protection

- Reverse Polarity** Present
- Overload current** Present

Environment


- Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- Operating Humidity** 5 ~ 95% (non-condensing)
- Storage Humidity** 0 ~ 95% (non-condensing)
- MTBF** 833,835 hours

Certifications


- Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- EMI** FCC Part 15 Subpart B Class A, EN 55011/ 55022 Class A
- EMS** EN 61000-4-2 (Level 3)
EN 61000-4-3 (Level 3)
EN 61000-4-4 (Level 4)
EN 61000-4-5 (Level 3)
EN 61000-4-6 (Level 3)
EN 61000-4-8 (Level 4)
- Shock** IEC 60068-2-27
- Freefall** IEC 60068-2-32
- Vibration** IEC 60068-2-6

Dimensions

EKI-3525M

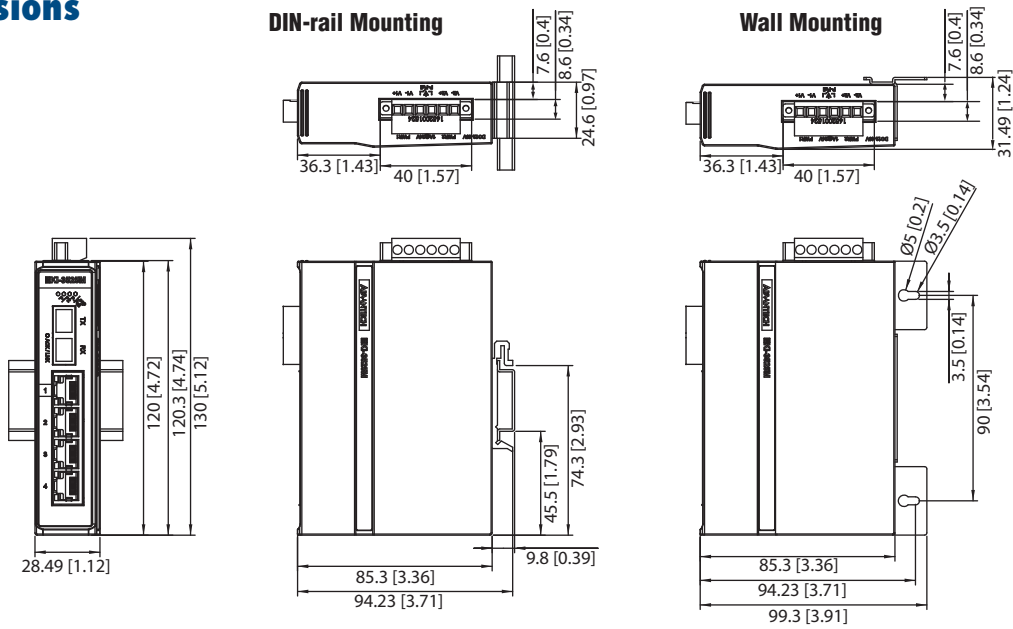

EKI-3525S

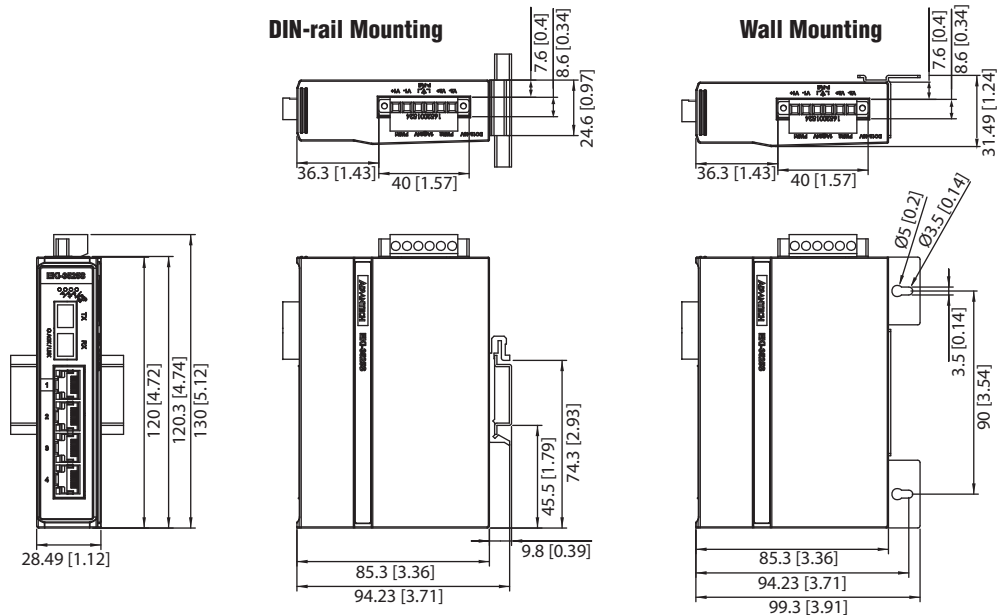

Ordering Information

- EKI-3525M 4-port 10/100Mbps + 1-port 100FX Multi-mode Unmanaged Industrial Ethernet Switch
- EKI-3525S 4-port 10/100Mbps + 1-port 100FX Single-mode Unmanaged Industrial Ethernet Switch