



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



EKI-7626C/CI

16+2G Combo Port Gigabit Unmanaged Industrial Ethernet Switch



Features

- Provides 2 Gigabit Copper/SFP combo port plus 16 Fast Ethernet ports (EKI-7626C/CI)
- SFP socket for Easy and Flexible Fiber Expansion
- Supports Auto Negotiation and Auto MDI/MDI-X
- Provides flexible mounting: DIN-rail and Wall mount
- Supports Dual 12 ~ 48 V_{DC} power input and 1 relay output
- Supports wide operating temperatures from -40 to 75°C (EKI-7626CI)

Introduction

Aside from 2 Gigabit fiber optic/copper combo ports, the EKI-7626C/CI comes equipped with 16 x 10/100Base-T (X) fast Ethernet ports. Traditional RJ45 ports can be used for up-linking wide-band paths in short distances (< 100 m), or the appropriate replaceable SFP module can be used for the application of wideband uploading and long distance transmissions to flexibly fit field requests. The long MTBF (Mean Time Between Failures) ensures low operation and maintenance cost. EKI-7626C/CI includes a switch controller that can automatically sense transmission speeds (10/100 Mbps) The RJ45 interface can also be auto-detected, so MDI or MDI-X is automatically selected and a cross-over cable is not required. All Ethernet ports have memory buffers that support the store-and-forward mechanism, which assures that data can be transmitted properly

Specifications

Communications

- **Standard** IEEE 802.3, 802.3ab, 802.3u, 802.3x, 802.3z
- **LAN** 100Base-TX, 10/100Base-T, Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)
Gigabit Fiber: Up to 110 km (depending on SFP)
- **Transmission Speed** Ethernet: 10/100 Mbps Auto-Negotiation
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation
SFP: Up to 1000 Mbps

Interface

- **Connectors** 16 x RJ45 (Ethernet) with 2 x RJ45/SFP (mini-GBIC) combo ports (EKI-7626C/CI)
6-pin removable screw terminal (Power & Relay)
- **LED Indicators** System: PWR1, PWR2, P-Fail
Gigabit Copper: Link/Activity, Speed (1000 Mbps)
Gigabit SFP: Link/Activity

Power

- **Power Consumption** Max. 6.5 W
- **Power Input** 12 ~ 48 V_{DC}, redundant dual inputs
- **Fault Output** 1 Relay Output

Mechanism

- **Dimensions (W x H x D)** 79 x 152 x 105 mm (3.11" x 5.98" x 4.13")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

Protection

- **Reverse Polarity** Present
- **Overload Current** Present

Environment


- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
Wide Temp. Model -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 295,000 hours

Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

Dimensions

Unit: [mm]

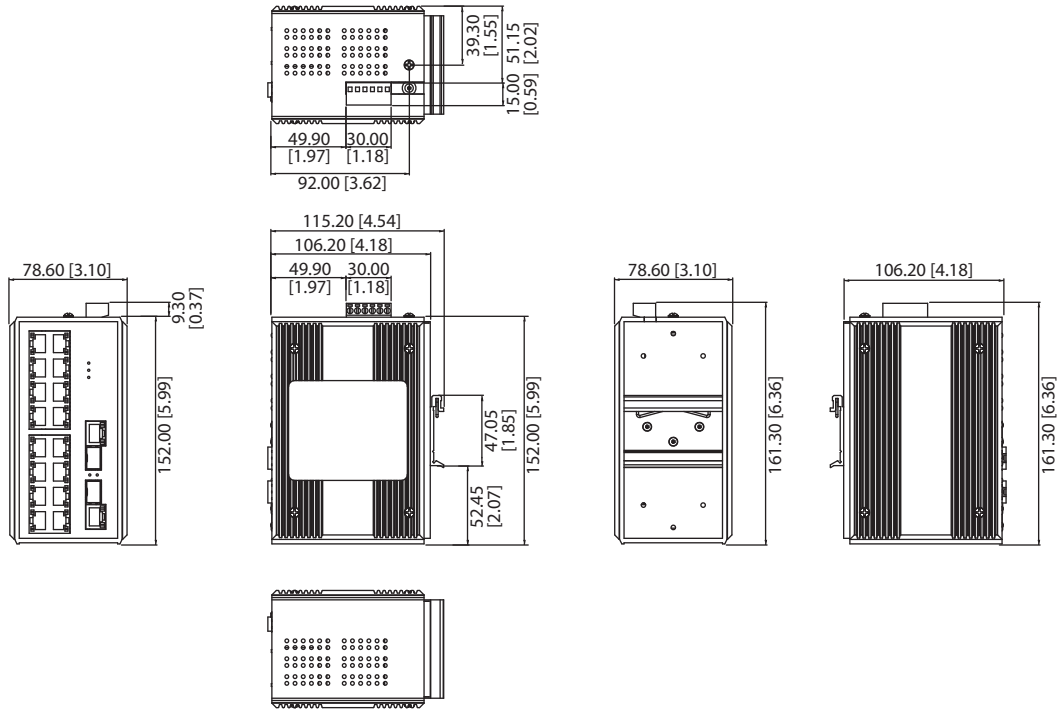

Panel Cut-out Dimensions: 115.2 x 152 x 78.6 mm (4.54" x 5.99" x 3.1")

Ordering Information

- **EKI-7626C** 16+2G Combo Port Unmanaged Ethernet Switch
- **EKI-7626CI** 16+2G Combo Port Unmanaged Ethernet Switch w/ Wide Temp