



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



EKI-7659CPI

8+2G Port Gigabit Managed Redundant Industrial PoE Switch with Wide Temperature



Features

- 2 Gigabit Copper/SFP combo ports, plus 8 PoE injector ports
- SFP socket for Easy and Flexible Fiber Expansion
- Redundancy: Gigabit X-Ring Pro (ultra high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D)
- Management: Web, Telnet, Serial Console, SNMP
- Control: VLAN/GVRP, QoS, IGMP Snooping/Query, LACP, Rate Limit
- Security: IP/MAC and port binding, DHCP Server, IP access list, 802.1X, SSL SNMPv3
- Diagnostic: Port Statistic, Port Mirroring, RMON, Trap, Email Alert, Syslog
- Dual 48 V_{DC} power input and 1 relay output
- Supports wide operating temperatures -40 ~ 75°C

Introduction

The EKI-7659CPI supports eight Power over Ethernet (PoE) ports and two Gigabit combo ports. The PoE device helps realize a centralized power supply solution and provides up to 15.4 watts of power per port. To create reliability in your network, the EKI-7659CPI comes equipped with a proprietary redundant network protocol -- X-Ring Pro that was developed by Advantech, which provides users with an easy way to establish a redundant Ethernet network with ultra high-speed recovery time less than 20 ms. Furthermore, EKI-7659CPI also supports many advanced network standards to optimize network performance, ease maintenance issues, and secure network safety.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3z, 802.3ad, 802.3ab, 802.3af, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X
- **LAN** 10/100/1000Base-T (X), Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)
SFP: Up to 110 km (depends on SFP)
- **Transmission Speed** Ethernet: 10/100 Mbps Auto-Negotiation
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation
Gigabit Fiber: Up to 1000 Mbps

Interface

- **Connectors** 8 x RJ45 (Ethernet)
2 x RJ45/SFP (mini-GBIC) combo ports
6-pin removable screw terminal (Power&Relay)
- **LED Indicators** System: PWR, PWR1, PWR2, R.M., P-Fail
10/100T (X): Link/Activity, Duplex/Collision
Gigabit Copper: Link/Activity, Speed (1000 Mbps)
SFP: Link/Activity
- **Console** RS-232 (RJ45)

Network Management

- **Configuration** Web browser, Telnet, Serial console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6
- **VLAN** IEEE 802.1Q, GVRP, Port-based VLAN
- **Redundancy** Advantech X-Ring Pro (Recovery time < 20 ms at 250 pcs full loading ring structure), Dual Homing, Dual Ring, Couple Ring, 802.1w/D RSTP/STP
- **Security** IP Access security, port security, DHCP Server, Port and IP Binding, 802.1X Port Access Control, SSL
- **Traffic Control** IGMP Snooping/Query for multicast group management, Port Trunking, Static/802.3ad, LACP Rate limit and storm control, IEEE 802.1p QoS CoS/TOS/DSCP priority queuing, IEEE 802.3x flow control
- **Diagnostics** Port Mirroring, Real-time traffic statistic, MAC Address Table, Sntp, Syslog, E-Mail Alert, SNMP Trap, RMON

Mechanism

- **Enclosure** IP30, metal shell with solid mounting kits
- **Dimensions (W x H x D)** 79 x 152 x 105 mm (3.11" x 5.98" x 4.13")
- **Mounting** DIN-rail, Wall

Power


- **Power Consumption** 116 W (Full load PoE)
- **Power Input** 48 V_{DC}, redundant dual power input
- **Power Output** 15.4W at 48V (per PoE port)
- **Fault Output** 1 Relay Output

Protection

- **Power Reverse** Present
- **Overload Current** Present

Dimensions

Unit: mm [inch]

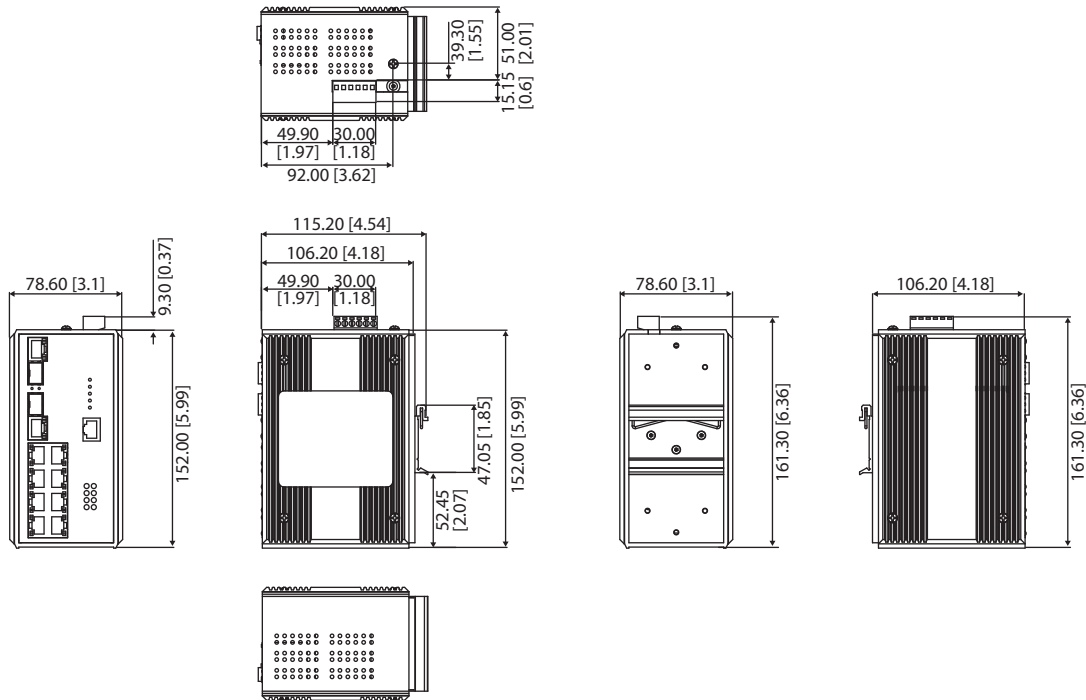

Panel Cut-out Dimensions: 115.2 x 152 x 78.6 (4.54" x 5.99" x 3.1")

Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 190,200 hours

Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Patent** <http://www.advantech.com/legal/patent>

Ordering Information

- **EKI-7659CPI** 8FE + 2G Combo Port Managed PoE Ethernet Switch w/Wide Temp