



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



EKI-9228G-8CMI

EKI-9228G-8COI

Ind. Rackmount L2 Managed Switch with 48V_{DC}

Ind. Rackmount L2 Managed Switch with AC/DC



Features

- 16 x Gigabit RJ-45 ports + 4 Gigabit x SFP ports + 8 x Gigabit combo ports
- SFP socket for easy and flexible fiber expansion
- Management: SNMP v1/v2c/v3, WEB, Telnet, Standard MIB
- Security: 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), HTTPS, SSH and SNMPv3
- Redundancy: Gigabit X-Ring Pro (ultra high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D), MSTP
- Dual power input and 2 relay output
- -40 ~ 85°C wide-range operating temperature

Introduction

The EKI-9228G series are designed for power substation automation applications which meet IEC 61850-3 certification. Thanks to its -40 ~ 85°C wide operating temperature it can operate reliably in extremely harsh environments. Designed with 16 Gigabit ports, 4 Gigabit SFP ports, and 8 Gigabit ports it provides abundant and flexible connection. Finally, the EKI-9228G series contain dual power inputs to ensure system stability and 2 relay outputs for greater user flexibility.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3z, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X, 802.3ad, 802.3ab
- **LAN** 10/100/1000Base-T (X), Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)
SFP: Up to 110 km (depends on SFP)
- **Transmission Speed** Ethernet: 10/100 Mbps Auto-Negotiation
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation
Gigabit Fiber: Up to 1000 Mbps

Interface

- **Connectors** 16 x RJ45 (Ethernet)
8 x RJ45/SFP (mini-GBIC) combo ports
4 x SFP Ports
3-pin removable screw terminal (Power)
4-pin removable screw terminal (Relay)
- **LED Indicators** 10/100T (X): Link/Activity, Duplex/Collision
Gigabit Copper: Link/Activity, Speed (1000 Mbps)
SFP: Link/Activity
- **Console** RS-232 (RJ45)

Mechanism

- **Enclosure** IP30, metal shell with solid mounting kits
- **Dimensions (W x H x D)** 442 x 44 x 352 mm (17.4" x 1.73" x 13.85")
- **Mounting** 1U 19" Rack mount

Power

- **Power Consumption** EKI-9228G-8CMI: 19.21 W @ 48V
EKI-9228G-8COI: 19.24 W @ 110V_{AC}
- **Power Input** EKI-9228G-8CMI: 48V_{DC}
EKI-9228G-8COI: 90 ~ 264AC/88 ~ 370V_{DC}
- **Fault Output** 2 Relay Outputs

Protection

- **Power Reverse** Present
- **Overload Current** Present

Environment


- **Operating Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)

Certification

- **Safety** UL 60950
- **EMI** CE FCC EN55022 Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Power Automation** IEC 61850-3

Dimensions

Unit: mm

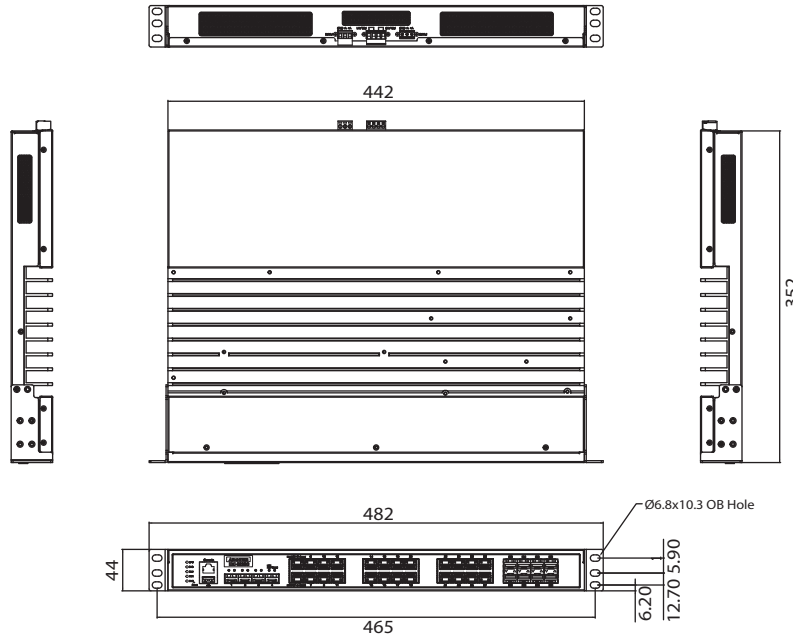

L2 Features

- **L2 MAC Address** 16K
- **Jumbo Frame** 9KB
- **VLAN Group** 4093 (VLAN ID 1-4093)
- **VLAN** Mac based VLAN, Protocol based VLAN, IP subnet based VLAN, Port based VLAN, GVRP
- **Port Mirroring** Per port, Multi-source port
- **IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **Storm Control** Broadcast, Multicast, Unknown unicast
- **Spanning Tree** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring Pro

QoS

- **Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Priority)
- **Class of Service** IEEE 802.1p based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Egress Rate limit, Ingress Rate limit
- **Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

Security

- **Port Security** Static, Dynamic
- **Authentication** 802.1x (Port-Based), RADIUS, TACACS+
- **ACL** 550 rules
- **Advanced Security** IP Source Guard

Management

- **DHCP** Client, Server, Relay, Option 66/67
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- **Security Access** SSH 2.0, SSL
- **Software Upgrade** TFTP, HTTP, Dual Image
- **NTP** NTP client

Ordering Information

- **EKI-9228G-8CMI-AE** Ind. Rackmount L2 Managed Switch with 48VDC
- **EKI-9228G-8COI-AE** Ind. Rackmount L2 Managed Switch with AC/DC