



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## FEATURES

- » High performance module with low RC time constant
- » Long lifetimes with over 500,000 duty cycles
- » Two serial connection of 3F cells
- » Rated voltage of 5V and capacitance of 1.5F
- » Compliant with RoHS and REACH requirements

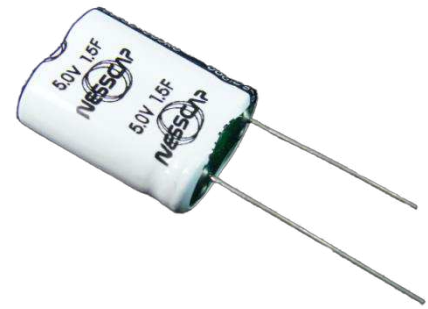

\* Image is not to scale

## SPECIFICATIONS

Electrical		EMHSR-0001C5-005R0
Rated Voltage ( $V_R$ ) at 65°C		<b>5 VDC</b>
Rated Voltage ( $V_R$ ) at 85°C		4.6 VDC
Surge Voltage <sup>1</sup>		5.4 VDC
Rated Capacitance <sup>2</sup>		<b>1.5 F</b>
Capacitance Tolerance	Max.	-10% / +20%
	Avg. <sup>4</sup>	-5% / +5%
DC-ESR <sup>3</sup>	Max.	143 mΩ
	Avg. <sup>4</sup>	104 mΩ
Max. Leakage Current <sup>5</sup>		0.02 mA
Maximum Continuous Current	at $\Delta T = 15^\circ\text{C}$	1.1 A
	at $\Delta T = 40^\circ\text{C}$	1.9 A
Maximum Peak Current, Non-repetitive <sup>6</sup>	at 65°C	3.0 A
	at 85°C	2.8 A
Max. Stored Energy ( $E_{\text{max}}$ ) at $V_R$ <sup>7</sup>	at 65°C	5.2 mWh
	at 85°C	4.4 mWh
Usable Specific Power <sup>7</sup>	at 65°C	6.1 kW/kg
	at 85°C	5.2 kW/kg
Impedance Match / Specific Power <sup>7</sup>	at 65°C	12.8 kW/kg
	at 85°C	10.8 kW/kg
Max. Gravimetric Specific Energy <sup>7</sup>		1.5 Wh/kg

Temperature	
Operating Temperature Range	-40 ~ 65°C (up to 85°C with de-rated voltage) ( $\Delta\text{CAP} < 5\%$ and $\Delta\text{ESR} < 300\%$ of initial value measured at 25°C, with linear voltage de-rating to 2.3V @ 85°C)
Storage Temperature Range	-40 ~ 70°C (storage without charge)

Life		
Endurance <sup>8,9</sup>	at 65°C, 5.0V	1,500 hours
	at 85°C, 4.6V	1,000 hours
Room Temperature (at $V_R$ and 25°C) <sup>8</sup>	10 years	
Cycle Life (at 25°C) <sup>8</sup>	500,000 cycles (Cycled from $V_R$ to $1/2V_R$ using 100mA/F const. current with 10sec rest between charge and discharge steps)	
Shelf Life	2 years (Stored without charge at or under 70°C and under 40% RH)	


Safety & Certification	
RoHS	Compliant
REACH	Compliant

**THERMAL**

Characteristics	EMHSR-0001C5-005R0
Typical Thermal Resistance, $R_{th}$	77°C/W
Typical Thermal Capacitance, $C_{th}$	2.8 J/°C
Cont. Current to $\Delta T = 15^\circ C$	1.1 A
Cont. Current to $\Delta T = 40^\circ C$	1.9 A

**PHYSICAL**

**Drawing**

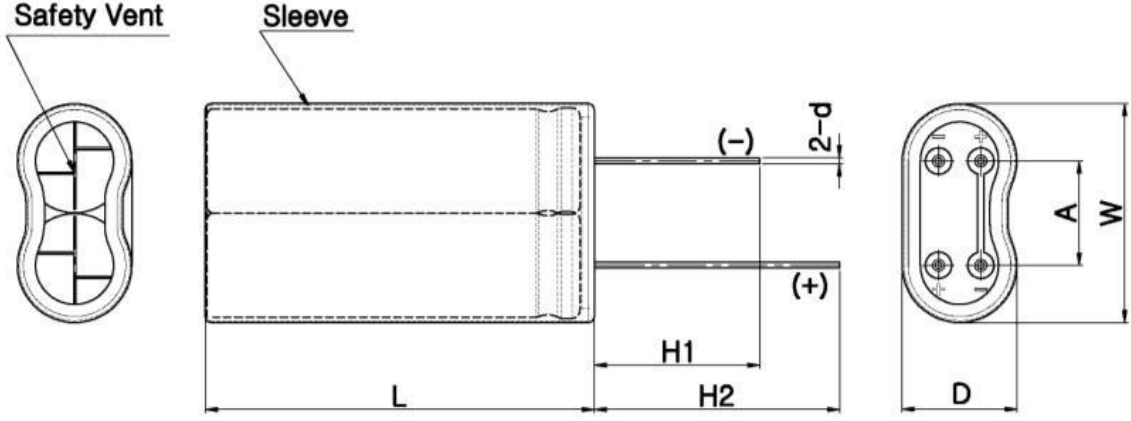

See Note on Mounting<sup>10</sup>

Dimensions	EMHSR-0001C5-005R0
D (Max)	9.5 mm
L (Max)	23 mm
W (Max)	17.5 mm
d ( $\pm 0.05$ )	0.6 mm
H1 (Min)	15 mm
H2 (Min)	19 mm
A ( $\pm 0.1$ )	8.6 mm
Nominal Weight	3.4 g




**NOTE**
**1. Surge Voltage**

- > Absolute maximum voltage, not repeated and for no longer than 1 second.

**2. Rated Capacitance**

- > Constant current charge with 10mA/F to  $V_R$
- > Constant voltage charge at  $V_R$  for 5min
- > Constant current discharge with 10mA/F to 0.1V




$$C = \frac{I \times (t_2 - t_1)}{v_1 - v_2}$$

- Where  $v_1$  is the measurement starting voltage,  $0.8 \times V_R$  (V);  
 $v_2$  is the measurement end voltage,  $0.4 \times V_R$  (V);  
 $t_1$  is the time from discharge start to reach  $v_1$  (s);  
 $t_2$  is the time from discharge start to reach  $v_2$  (s);  
 $I$  is the absolute value of the discharging current (A).

**3. ESR (Equivalent Series Resistance)**
**> ESR<sub>DC</sub>**

- Constant current charge to  $V_R$
- Constant voltage charge at  $V_R$  for 5min
- Constant current discharge to 0.1V



$$R_d = \frac{\Delta v}{I}$$

- Where  $R_d$  is the ESR<sub>DC</sub> (Ω);  
 $\Delta v$  is the voltage drop for 10ms (V);  
 $I$  is the discharge current (A).

**4. Average (or Typical)**

- > Percentage spread that may be present in one shipment

**5. Leakage Current**

- > The capacitor is charged to the rated voltage at 25°C.
- > Leakage current is the current at 72hours that is required to keep the capacitor charged at the rated voltage

**6. Max. Current**

- > Current for 1sec discharging from rated voltage to half rated voltage under constant current discharging mode.

$$I_{Max.} (A) = \frac{\frac{1}{2}V_R}{\Delta t / C + R_d}$$

- Where  $\Delta t$  is the discharge time (sec) and  $\Delta t$  is 1 sec in this case;  
 $C$  is the capacitance (F);  
 $R_d$  is the ESR<sub>DC</sub> (Ω);  
 $V_R$  is the rated voltage (V).

- > Max. Current **should not** be used in normal operation and is only provided as a reference value.

**7. Energy & Power**

- > Max. Stored Energy at  $V_R = \frac{\frac{1}{2}CV_R^2}{3600}$

- Where  $C$  is the capacitance (F);  
 $V_R$  is the rated voltage (V).

- > Usable Specific Power, IEC 62391-2 (W/kg) =  $\frac{0.12 \cdot V^2}{ESR_{DC} \cdot Mass}$

- > Impedance Match Specific Power (W/kg) =  $\frac{0.25 \cdot V^2}{ESR_{DC} \cdot Mass}$

- > Gravimetric Specific Energy (Wh/kg) =  $\frac{E_{Max.}}{Weight}$

**8. Lifetime**
**> End-of-Life Conditions**

- Capacitance: -30% from rated min. value
- ESR: +100% from max. ESR value

**9. Endurance**
**> Conditions**

- Temperature:  $65 \pm 2^\circ\text{C}$  or  $85 \pm 2^\circ\text{C}$
- Test duration: 1500 (+48/-0) h
- Applied voltage:  $V_R \pm 0.02\text{V}$
- Capacitance and ESR measurement are made at 25°C

**10. Mounting**

- > Provide properly spaced holes for mounting according to the cell dimensions as to minimize leads being mechanically stressed.
- > Do not place any copper patterns, including the ground pattern, or through-hole via underneath the cell or on the underside of the PCB (if a double-sided PCB is used) as the electrolyte inside the cell, if it should leak, can corrode, short-circuit, the patterns and/or damage other components nearby. Spacing of 1mm or more should be provided in between the footprint of the cell and the nearest copper pattern.
- > Protective coating of components nearby on the PCB is recommended to reduce the risk of them being damaged in an event of electrolyte leakage.
- > Provide at least 2mm clearance above the safety vent and do not position anything above the safety vent that may be damaged by vent rupture.
- > Place cells on the PCB taking into account that the cells may not be completely hermetic during its lifetime. Electrolyte vapor and gases generated during normal use may escape the package during normal operation.
- > Soldering recommendation for small and medium size cells available on [www.nesscap.com](http://www.nesscap.com) under Support > Download.

The contents of this document are subject to change without notice. Values presented are thought to be accurate at the time of writing. Nesscap does not guarantee that the values are error-free, nor does Nesscap make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. For more information, you can reach us at one of following contacts

 <b>Nesscap Energy Inc.</b> Suite 3800, Royal Bank Plaza, South Tower, 200 Bay Street, P.O. Box 84, Toronto, Ontario, M5J 2Z4 <b>CANADA</b>	 <b>Nesscap Energy Inc.</b> S24040 Camino Del Avion #A118, Monarch Beach, California, 92629 <b>USA</b>	 <b>Nesscap Co., Ltd.</b> 17, Dongtangiheung-ro 681beon-gil, Giheung-gu, Yongin-si, Gyeonggi-do <b>REPUBLIC OF KOREA</b>	 <b>Nesscap China</b> Room 1608, Block N, Cangsong Building, Chegongmiao, Futian District, Shenzhen City, P.R.C <b>CHINA</b>	 <b>Nesscap Energy EASTERN EUROPE</b> 10A, prospect 60-Iefiya Oktyabrya Moscow, 117036 <b>RUSSIA</b>	 <b>Nesscap Energy GmbH</b> Beerengarten 4 D-86938 Schondorf <b>GERMANY</b>
<a href="mailto:marketing@nesscap.com">marketing@nesscap.com</a>			<a href="mailto:info@nesscap-energy.de">info@nesscap-energy.de</a>		