

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







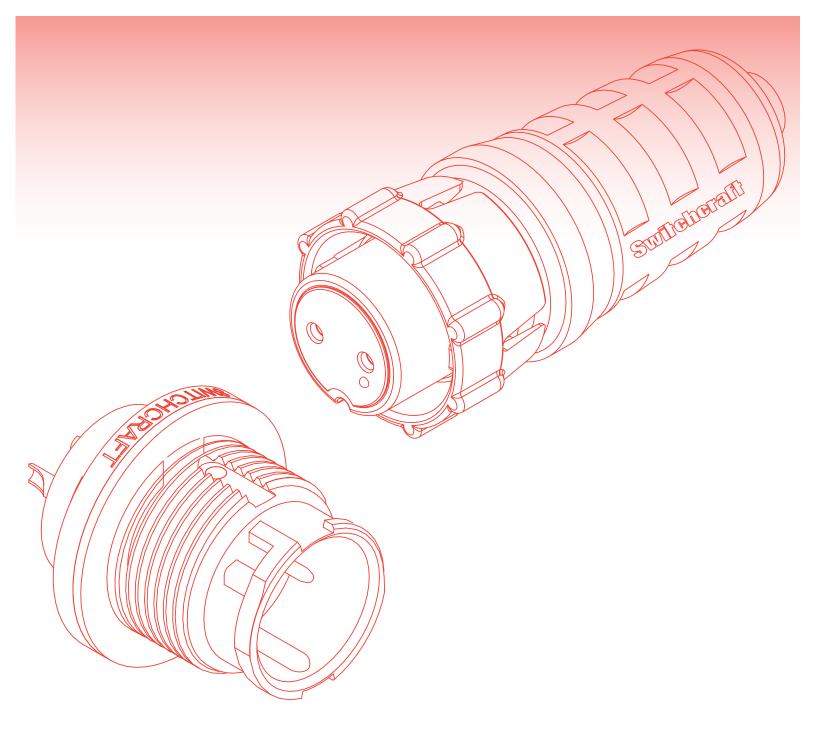

**NEW PRODUCT BULLETIN 602** 



A HEICO COMPANY



**NEW PRODUCT BULLETIN 602** 





#### **FEATURES & BENEFITS**

- Sealed to IP68 NEMA 250 (6P)
- Patented grommet & o-ring free design
- Available in ribbed or winged coupling ring
- Cable, panel & cable to cable options
- Gold plated contacts standard
- Solder, crimp & PC contact options
- Straight & right angle PC contact panel connectors

#### **APPLICATIONS**

- Any sealed data transmission
- Military or industrial GPS location devices
- Instrumentation
- Medical data carts
- Marine Applications
- Transportation
- General industrial electronic applications

#### **NEW PRODUCT BULLETIN 602**

### **SPECIFICATIONS**

#### **MECHANICAL SPECIFICATIONS**

Life: Minimum 600 insertion / withdrawal cycles

Vibration: Mil-Std 202 Method 201

Shock: Mil-Std 202 Method 213B, condition K

Hex Nut Torque: All series hex nut to withstand 8-10 in-lb tightening torque.

Coupling Locking Style Bayonet with ribbed coupling nut (winged coupling nut optional)

Back Shell Style: Boot

**ELECTRICAL SPECIFICATIONS** 

Voltage Rating: 250 V AC/DC

Current Rating: 13.0 A – 2 or 3 #16 contacts accepts 16 through 18 AWG

7.5 A - 2 through 6 #20 contacts accepts 20 through 22 AWG

6.5 A – 7 or 8 #20 contacts accepts 20 through 22 AWG

3 A – 9 through 18 #26 contacts accepts 26 through 28 AWG

Insulation Resistance:100 MΩ minContact Resistance:20 mΩ max

**ENVIRONMENTAL SPECIFICATIONS** 

Operating Temperature Rating:  $-40^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$  to  $+149^{\circ}\text{F}$ )

Moisture Resistance: Mil-Std 202 Method 106F

Insulation Resistance: Mil-Std 202 Method 302 condition B

Thermal Shock: Mil-Std 202 Method 107G

Salt Atmosphere (Corrosion): Mil-Std 202 Method 101D condition B

Weathertight: IEC 60529 IP16/IP18

IEC 60529 IP66/IP68 IEC 60529 IP68 NEMA 250 (6P)

CFR 46 Part 110.20

**MATERIAL SPECIFICATIONS** 

Panel connector shells & locking disk: Thermoplastic UL94V-0
Connector shell interior: Elastomeric, Black UL 94HB

offinector shell interior. Elastometric, black of 94nb

Contacts: Copper Alloy, Gold over Nickel Plate

**MOLDED CABLE ASSEMBLIES** 

Weathertight: IEC 60529 IP66/IP68


IEC 60529 IP68 NEMA 250 (6P) CFR 46 Part 110.20

**CERTIFICATIONS** UL File E319753; 2-8 pin cord, in-line and panel only




**NEW PRODUCT BULLETIN 602** 


#### **CORD CONNECTORS**

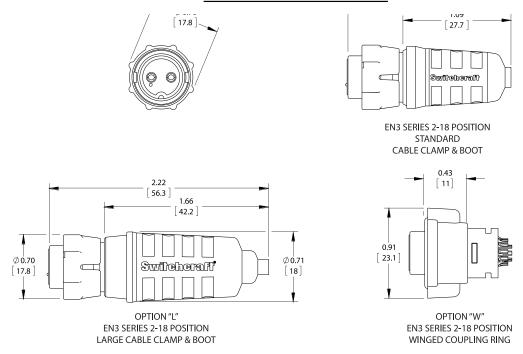

#### CABLE TO CABLE CONNECTORS

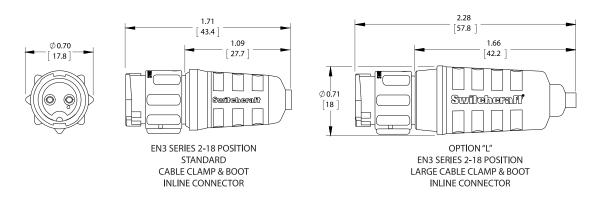


## **EN3® RIGHT ANGLE 2-8 POSITION MOLDED CONNECTORS**

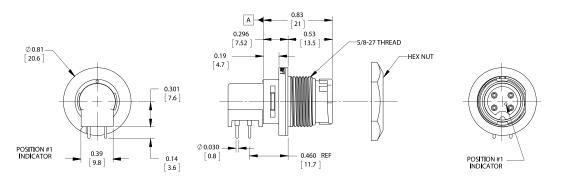


**NEW PRODUCT BULLETIN 602** 

### **PANEL CONNECTORS**

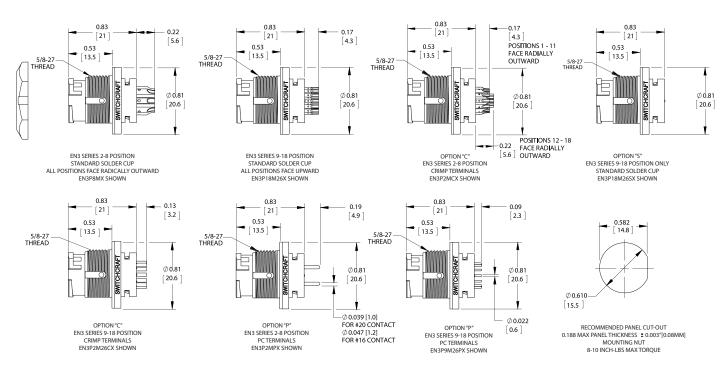


## **RIGHT ANGLE PC BOARDS 2-18 CONTACT PANEL CONNECTORS**

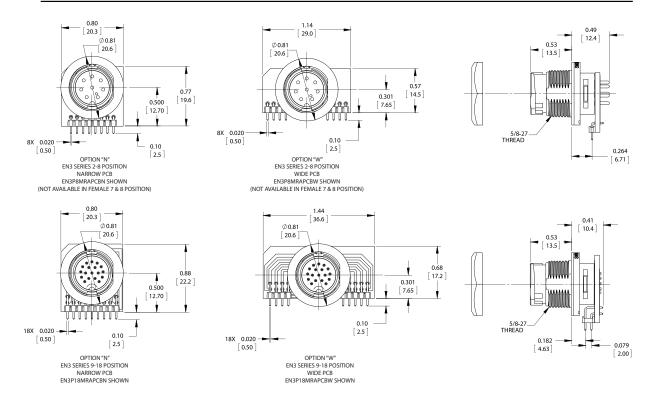


**NEW PRODUCT BULLETIN 602** 

#### EN3® ORDERING CODE

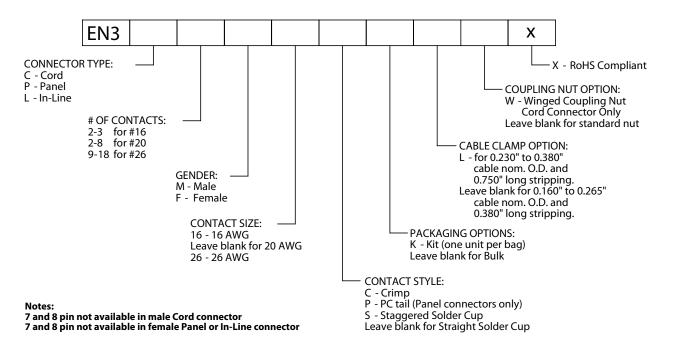

#### EN3® RIGHT ANGLE PC BOARD MOUNT 2-18 CONTACT ORDERING CODE

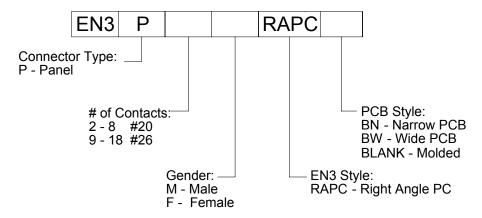

Notes:

7 and 8 pin not available in female Panel connector

### **EN3® SERIES ACCESSORIES**

EN3 BOOT EN3 SERIES, REGULAR BOOT FOR CABLE DIAMETERS 0.160"-0.265"
EN3 BOOTL EN3 SERIES, LARGE BOOT FOR CABLE DIAMETERS 0.230"-0.380"

**EN3 CAP** EN3 HARSH ENVIRONMENT PANEL OR CABLE END CAP RATED TO IP68, RUBBER LANYARD STYLE

**EN3CAPC** CORD PLUG CAP FOR EN3 SERIES

**EN3CLAMPX** EN3 HARSH ENVIRONMENT CABLE CLAMP

**EN3IPCAPX** EN3 SERIES, IP68 RATED PANEL OR INLINE CAP WITH LOCK RING

**EN3NUT** EN3 HARSH ENVIRONMENT HARDWARE-NUT

EN3 PANEL ADAPTOR, FOR USE WITH EN3 QUICK CONNECT/ DISCONNECT CABLE ASSEMBLIES

