

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Type 4 Mild Steel Wallmount Enclosure w/ Window Eclipse Series

Hinge Door with Quarter Turn



Panel Sold Separately









Application

- Designed to enclose electrical and/or electronic equipment in wallmount applications where viewing of component operation is necessary while maintaining protection ratings.
- Impressive styling features like hidden hinges, attractive latching systems make the Eclipse a suitable addition to any high-tech equipment installation.
- A wide range of sizes and practical accessories make this product line a complete package.

Standards

- UL 508 Type 3R, 4 and 12
- CSA Type 3R, 4 and 12
- Complies with
 - NEMA 3R, 4 and 12
 - o IEC 60529, IP66

Construction

- Formed 14 or 16 gauge steel.
- Full view UV resistant polycarbonate window allow maximum viewing area of inner panel.
- Smooth, continuously welded seams ground smooth.
- Door stiffeners are provided where required for increased strength and rigidity designed to also permit additional mounting options.
- Formed lip on enclosure to exclude flowing liquids and contaminants.
- Door latches feature the added safety of quarter turn slot requiring use of tool for opening.
- Doors may be easily removed for modifications and are interchangeable.
- Seamless poured-in place gasket.
- Collar studs provided for mounting inner panel.
- Includes hardware kit with panel mounting nuts and sealing washers for wall mounting holes.
- Bonding stud provided on door and grounding stud installed in enclosure.
- Hinges are constructed from 304 stainless steel.
- Hinge pins are stainless steel.
- Quarter turn latches are zinc diecast with black epoxy finish.


Finish

 Cover and enclosure are phosphatized and finished with a recoatable powder inside and out with choice of ANSI 61 smooth Gray (GY) or RAL703! textured light gray (LG).

Accessories

- Cooling Products
- Ventilation
- DIN Rail Mounting Kit
- Drip Shield Kit
- Gland Plates
- Handles
- Literature Pocket
- Mounting Foot Kit
- Swing Frame
- Rear Hole Plugs
- Quarter Turn Assemblies
- Type 4 Hardware Kits
- Padlock Adaptor

- Blowers and Fans
- DIN Rails
- Door Stop Kit
- Filtered Fans
- Heaters
- Inner Panels
- Quarter Turn Inserts and Keys
- Swing Panel
- Eclipse Rack Panel
- Replacement Hinge Pins
- Temperature Controls
- Touch-Up Spray Paint
- Ground Wire Kits

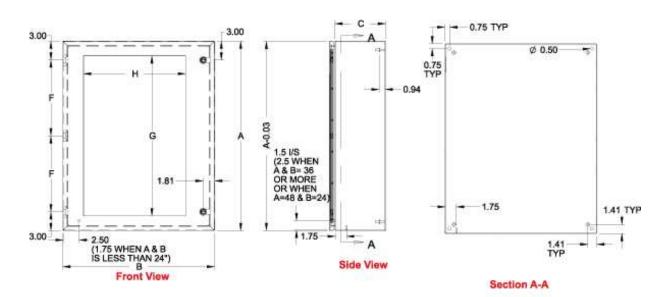



	Part No.	`	Overa		Door/Rody	Latch1	Uinas			wing	Optional Panel			Ship Wt.
Part No.	(RAL7035 Light	Dimensions		Door/Body Latch ¹ Hinge				Area		Panei	Dimensions		WVC.	
(ANSI 61 Gray)	Gray)	Α	В	С	Gauge	Qty	Qty	F	G	Н	Part No.	D	E	(lbs)
EN4SD16126WGY	EN4SD16126WLG	16.00	12.00	6.00	16	1	2	10.00	11.33	6.71	EP1612	14.20	10.20	16
EN4SD20166WGY	EN4SD20166WLG	20.00	16.00	6.00	16	1	2	14.00	15.33	10.71	EP2016	18.20	14.20	22
EN4SD20206WGY	EN4SD20206WLG	20.00	20.00	6.00	16	1	2	14.00	15.33	14.71	EP2020	18.20	18.20	26
EN4SD24206WGY	EN4SD24206WLG	24.00	20.00	6.00	16	1	2	18.00	19.33	14.71	EP2420	22.20	18.20	30
EN4SD24246WGY	EN4SD24246WLG	24.00	24.00	6.00	14	2	2	18.00	19.33	16.15	EP2424	22.20	22.20	37
EN4SD16128WGY	EN4SD16128WLG	16.00	12.00	8.00	16	1	2	10.00	11.33	6.71	EP1612	14.20	10.20	16
EN4SD20168WGY	EN4SD20168WLG	20.00	16.00	8.00	16	1	2	14.00	15.33	10.71	EP2016	18.20	14.20	25
EN4SD20208WGY	EN4SD20208WLG	20.00	20.00	8.00	16	1	2	14.00	15.33	14.71	EP2020	18.20	18.20	28
EN4SD24208WGY	EN4SD24208WLG	24.00	20.00	8.00	16	1	2	18.00	19.33	14.71	EP2420	22.20	18.20	32
EN4SD24248WGY	EN4SD24248WLG	24.00	24.00	8.00	14	2	2	18.00	19.33	16.15	EP2424	22.20	22.20	40
EN4SD30248WGY	EN4SD30248WLG	30.00	24.00	8.00	14	2	3	12.00	25.33	16.15	EP3024	28.20	22.20	46
EN4SD202012WGY	EN4SD202012WLG	20.00	20.00	12.00	16	1	2	18.00	15.33	14.71	EP2020	18.20	18.20	34
EN4SD242012WGY	EN4SD242012WLG	24.00	20.00	12.00	16	1	2	18.00	19.33	14.71	EP2420	22.20	18.20	38
EN4SD242412WGY	EN4SD242412WLG	24.00	24.00	12.00	14	2	2	18.00	19.33	16.15	EP2424	22.20	22.20	47

Part No.	Part No. (RAL7035 Light	Overall Dimensions			Door/Body Latch¹ Hinge				Viewing Area		Optional Panel	Inner Panel Dimensions		
(ANSI 61 Gray)	Gray)	Α	В	С	Gauge	Qty	Qty	F	G	Н	Part No.	D	E	(lbs)
EN4SD302412WGY	EN4SD302412WLG	30.00	24.00	12.00	14	2	3	12.00	25.33	16.15	EP3024	28.20	22.20	57
EN4SD242416WGY	EN4SD242416WLG	24.00	24.00	16.00	14	2	2	18.00	19.33	16.15	EP2424	22.20	22.20	66
EN4SD242420WGY	EN4SD242420WLG	24.00	24.00	20.00	14	2	2	18.00	19.33	16.15	EP2424	22.20	22.20	70
EN4SD302420WGY	EN4SD302420WLG	30.00	24.00	20.00	14	2	3	12.00	25.33	16.15	EP3024	28.20	22.20	82

¹ All Window Door latch types are quarter turns.

Data subject to change without notice

© 2017. Hammond Manufacturing Ltd. All rights reserved.