



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Bluetooth-Module PAN1550



## OUTLINES - ENW89805J

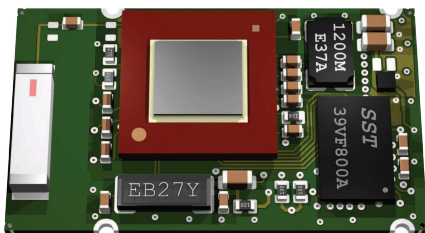

Now you can integrate Bluetooth very easy in your final product, without qualification – with the PAN1550. It has a serial interface and additional interfaces for integration into your system.

The PAN1550 is manufactured in a 22,8 x 13,4 x 2,2 mm<sup>3</sup> (height: w/o casing) SMD package with an integrated ceramic antenna and has been qualified as a Bluetooth 1.2 product. Re-qualification of your product is usually not required. This is why the PAN1550 is particularly suited for units produced in smaller or medium quantities.

**Any customizations for the software can be handled with our recommended partners.**

## FEATURES

### Overview

- Embedded Bluetooth Stacks including SPP, GAP and SDAP Profile available, other profiles supported on request
- Embedded applications supported
- Full product qualification (typically no re-qualification is needed)

### Basic Features

- Adaptive frequency hopping (AFH) enabled (1.2)
- High throughput (>600 kbps)
- Hold-, Park- and Sniffmode
- Up to 128 bit encryption
- Audio capability on an SCO channel
- Support for very low power modes - sleep and deep sleep
- All bluetooth data rates (up to 57,6/723,2Kbps)

### Interfaces

- Full-speed USB version 2.0 compliant
- Programmable baud rate UART (300 bps - 921,6 Kbps)
- Debug UART (DUART)
- Up to 16 General Purpose I/O's (interruptible)
- PCM audio (1 channel)
- SPI and JTAG interface

### Radio Features

- High sensitivity design (-86 dBm typ.)
- Integrated ceramic antenna and RF shield




MODULES  
WIRELESS  
M

**APPLICATIONS**

All Embedded Wireless Applications

- Printer Adapters
- Printers
- Access Points
- Wireless Sensors
- Industrial Applications
- Cable Replacement
- Personal Digital Assistants (PDAs)
- PC Motherboards & - Peripherals
- Scanners
- Mono & Stereo Audio Applications

**DIMENSIONS**

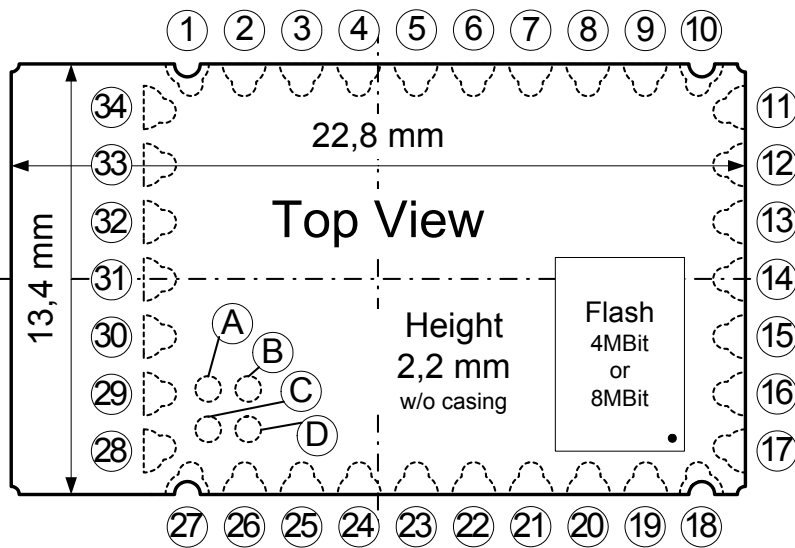

No.	Name	No.	Name
1	GND	20	GPIO [13]
2	NC	21	IF-SEL [15]
3	UART-CTS	22	GPIO [6]
4	UART-RXD	23	ATDO
5	UART-TXD	24	ATCK
6	UART-RTS	25	SPI-CLK [3]
7	PCM-CLK [9]	26	SPI-DO [0]
8	PCM-OUT [10]	27	GND
9	PCM-SYNC [7]	28	SPI-CS [2]
10	GND	29	SPI-DI [1]
11	ATRST	30	DUART-TXD [5]
12	PCM-IN [8]	31	DUART-RXD [4]
13	ATDI	32	USB-DM
14	ATMS	33	USB-DP
15	CE	34	INT 0
16	VDD	A	PA-CONTRL
17	RESET	B	TX-EN [12]
18	GND	C	RX-EN [11]
19	GPIO [14]	D	NC

**TECHNICAL CHARACTERISTICS**

Parameter	Value	Condition / Note
Receiver Sensitivity (BER=10 <sup>-3</sup> )	-86 dBm	with DH5 package
Output Power	0 dBm typ.	max. 4 dBm
Power Supply	3,3 V	Single operation voltage
Deep Sleep Power Consumption	<0,5 mW	140µA@3,3V 32kHz Crystal is on board
Data over USB at max. throughput	<145 mW	43mA@3,3V
Sniffmode (Tsniff 375ms), no traffic	<7,5mW	2,2mA@3,3V
Operating Temperature Range	-25°C to +85°C	