



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# eGaN® FETs and ICs for Wireless Power Applications




Wireless energy transfer enables the remote powering and charging of the myriad of battery-powered devices that have infiltrated our daily lives.

With this explosion in the variety and number of mobile devices, wireless power transfer offers the convenience of charging batteries without the annoyance of cumbersome cables and the inconvenience of looking for outlets to “plug in.”

Enhancement-mode gallium nitride (eGaN) FETs and ICs are ideal for wireless power applications due to their ability to operate at high frequency, high voltage, and high power.



## Demonstration Kits Speed Time to Market

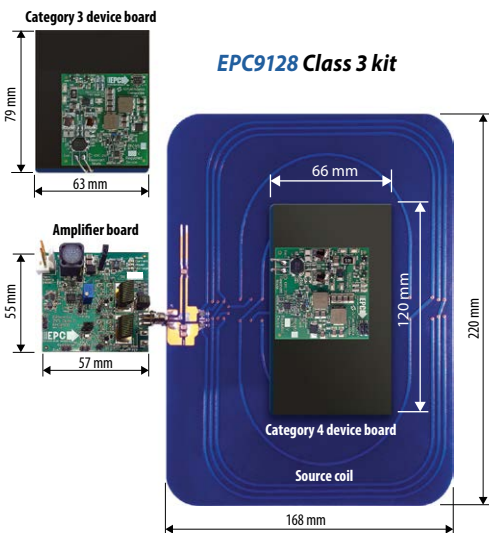

### eGaN Products Cover Full Power Range

- Class 2, 10 W
- Class 3, 16 W
- Class 4, 33 W
- Multi-mode

## AirFuel™ Alliance Compatible Wireless Power Kits

		Device Receive Unit			
Transmit Unit (amplifier)		<b>EPC9513</b> Category 3 (6.5 W)	<b>EPC9513</b> Category 3 (6.5 W) <b>EPC9515</b> Category 4 (13 W)	<b>EPC9513</b> Category 3 (6.5 W) <b>EPC9514</b> Category 5 (27 W)	Category 3 (6.5 W) Qi (5 W)
	Typical Application	Smart Phone, Digital Assistant, any 1 A USB Device	Tablet, any 2 A USB Device	Small Form Factor Laptop, 19 V Lamp	Smart Phone, Digital Assistant, any 1 A USB Device
	<b>EPC9510</b> Class 2 (10 W)	<b>EPC9127</b> Class 2 Demo Kit			
	<b>EPC9509</b> Class 3 (16 W)		<b>EPC9128</b> Class 3 Demo Kit		
	<b>EPC9512</b> Class 4 (33 W)			<b>EPC9129</b> Class 4 Demo Kit	
	<b>EPC9511</b> Multi-Mode (10 W)				<b>EPC9121</b> Multi-Mode Demo Kit

## Highly Resonant Wireless Power Kits

Part Number	Output Power	Operating Frequency
<b>EPC9111</b>	35 W	6.78 MHz preset or user selectable
<b>EPC9112</b>	50 W	6.78 MHz preset or user selectable

## Wireless Power Device Receive Boards

Part Number	Description	V <sub>IN</sub>	V <sub>OUT</sub>	I <sub>OUT</sub>	Featured Product
<b>EPC9513</b>	AirFuel Category 3, 5 W Device Receive Board	5	1 A	<b>EPC2019</b>	Smart Phone
<b>EPC9515</b>	AirFuel Category 4, 10 W Device Receive Board	5	2 A	<b>EPC2019</b>	Tablet, Phablet
<b>EPC9514</b>	AirFuel Category 5, 27 W Device Receive Board	19	1.4 A	<b>EPC2016C</b>	Small laptop

eGaN FETs and ICs

Recommended Devices for Wireless Power Applications

AirFuel Class	Max Input Power (W)	Topology	EPC Part Number	Configuration	V <sub>DS</sub>	Max R <sub>DS(on)</sub> (mΩ) @ 5 V <sub>GS</sub>	Q <sub>g</sub> typ (nC)	Q <sub>GS</sub> typ (nC)	Q <sub>GD</sub> typ (nC)	Q <sub>oss</sub> typ (nC)	Q <sub>RR</sub> (nC)	I <sub>D</sub> (A)	Pulsed I <sub>D</sub> (A)	Package (mm)
1	tbd	Class-E	EPC2037	Single	100	550	0.115	0.032	0.025	0.6	0	1	2.4	BGA 0.9 x 0.9
			EPC8010	Single	100	160	0.36	0.13	0.06	2.2	0	4	7.5	LGA 2.05 x 0.85
		ZVS Class-D	EPC2108	Dual with Sync Boot	60	240 3300	0.24 0.044	0.106 0.02	0.047 0.004	0.71 0.93 0.134	0	1.7 0.5	5.5 0.5	BGA 1.35 x 1.35
			EPC8009	Single	65	130	0.37	0.12	0.055	0.94	0	4	7.5	LGA 2.05 x 0.85
			EPC2038	Single with Gate Diode	100	3300	0.044	0.02	0.004	0.134	0	0.5	0.5	BGA 0.9 x 0.9
Current Mode Class-D	EPC8010	Single	100	160	0.36	0.13	0.06	2.2	0	4	7.5	LGA 2.05 x 0.85		
2	10	Class-E	EPC2012C	Single	200	100	1	0.3	0.2	10	0	5	22	LGA 1.7 x 0.9
			EPC2106	Half Bridge	100	70	0.73	0.24	0.140	3.96 4.68	0	1.7	18	BGA 1.35 x 1.35
			EPC2038	Single with Gate Diode	100	3300	0.044	0.02	0.004	0.134	0	0.5	0.5	BGA 0.9 x 0.9
		ZVS Class-D	EPC8010	Single	100	160	0.36	0.13	0.06	2.2	0	4	7.5	LGA 2.05 x 0.85
			EPC2038	Single with Gate Diode	100	3300	0.044	0.02	0.004	0.134	0	0.5	0.5	BGA 0.9 x 0.9
		Current Mode Class-D	EPC2107	Dual with Sync Boot	100	390 3300	0.19 0.044	0.077 0.02	0.041 0.004	0.9 1.25 0.134	0	1.7 0.5	3.8 0.5	BGA 1.35 x 1.35
			EPC8010	Single	100	160	0.36	0.13	0.06	2.2	0	4	7.5	LGA 2.05 x 0.85
3	16	Class-E	EPC2012C	Single	200	100	1	0.3	0.2	10	0	5	22	LGA 1.7 x 0.9
		ZVS Class-D	EPC2108	Dual with Sync Boot	60	240 3300	0.24 0.044	0.106 0.02	0.047 0.004	0.71 0.93 0.134	0	1.7 0.5	5.5 0.5	BGA 1.35 x 1.35
			EPC207C	Single	100	30	1.6	0.6	0.3	8.3	0	6	40	LGA 1.7 x 1.1
			EPC2038	Single with Gate Diode	100	3300	0.044	0.02	0.004	0.134	0	0.5	0.5	BGA 0.9 x 0.9
		Current Mode Class-D	EPC207C	Single	100	30	1.6	0.6	0.3	8.3	0	6	40	LGA 1.7 x 1.1
			EPC2016C	Single	100	16	3.4	1.1	0.55	16	0	18	75	LGA 2.1 x 1.6
			EPC2045	Single	100	7	5.2	1.7	1.1	21	0	16	130	BGA 1.5 x 2.5
4	33	ZVS Class-D	EPC2016C	Single	100	16	3.4	1.1	0.55	16	0	18	75	LGA 2.05 x 0.85
			EPC207C	Single	100	30	1.6	0.6	0.3	8.3	0	6	40	LGA 1.7 x 1.1
			EPC2038	Single with Gate Diode	100	3300	0.044	0.02	0.004	0.134	0	0.5	0.5	BGA 0.9 x 0.9
		Current Mode Class-D	EPC2045	Single	100	7	5.2	1.7	1.1	21	0	16	130	BGA 1.5 x 2.5
			EPC2001C	Single	100	7	7.5	2.4	1.2	31	0	36	150	LGA 4.1 x 1.6
			EPC2045	Single	100	7	5.2	1.7	1.1	21	0	16	130	BGA 1.5 x 2.5
5	45	ZVS Class-D	EPC2016C	Single	100	16	3.4	1.1	0.55	16	0	18	75	LGA 2.05 x 0.85
			EPC2038	Single with Gate Diode	100	3300	0.044	0.02	0.004	0.134	0	0.5	0.5	BGA 0.9 x 0.9
			EPC2045	Single	100	7	5.2	1.7	1.1	21	0	16	130	BGA 1.5 x 2.5
		Current Mode Class-D	EPC2001C	Single	100	7	7.5	2.4	1.2	31	0	36	150	LGA 4.1 x 1.6
			EPC2045	Single	100	7	5.2	1.7	1.1	21	0	16	130	BGA 1.5 x 2.5

Design Support Materials @ [www.epc-co.com](http://www.epc-co.com)



Wireless Power Handbook

Wireless Power Application Page  
 Video: Cut the Cord! Wireless Power with GaN  
 Highly Resonant Wireless Power Design Kits:  
 EPC9111: 35 W, highly resonant demo kit  
 EPC9112: 50 W, highly resonant demo kit  
 EPC9129: AirFuel™ Class 4 Kit, 33 W  
 EPC9121: 10 W Multi-Mode Kit  
 EPC9127: AirFuel™ Class 2 Kit, 10 W

EPC9128: AirFuel™ Class 3 Kit, 16 W  
 GaN Transistors for Efficient Power Conversion Textbook  
 DC-DC Handbook  
 Demo Boards  
 Reliability Reports  
 Device Models  
 Assembly Guides



For More Information

Please contact [info@epc-co.com](mailto:info@epc-co.com) or your local sales representative  
 Visit our website: [epc-co.com](http://epc-co.com)  
 Sign-up to receive EPC updates at [bit.ly/EPCCupdates](http://bit.ly/EPCCupdates) or text "EPC" to 22828



eGaN is a registered trademark of Efficient Power Conversion Corporation