

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

# 1394b Dongles for Long-Distance Over Coaxial Cable

*Extend 1394b Links up to 60m with Power Over Cable*

## Summary

Microchip's EQCO-FW7501 and EQCO-FW5001 are two extender solutions for the FireWire® serial bus, operating over 75Ω and 50Ω coaxial cables respectively.

Each unit contains a 1394b transceiver (EQCO875SC-HS or EQCO850SC-HS) that support full-duplex FireWire 800 (S800) data transfer rates (1.0 Gbit/s) over a single coax cable. The transceiver includes an adaptive equalizer that supports a cable length of up to 60m.

In addition to this long-distance, full-duplex data transmission, these devices allow power to be transmitted simultaneously from the host side to a target—such as camera or hard drive—over the coax cable.

The Microchip coaxial extenders fully support IEEE 1394b standards.

## Implementation


Our 1394b Over Coax dongles make it easy to implement long-distance FireWire-based applications. By taking advantage of coaxial cable's secure shielding, our 1394b dongles can even be used in electrically noisy environments such as factories.

The EQCO-FW7501 supports up to 60 meters of 75Ω coaxial cable; the EQCO-FW5001 supports up to 30m of 50Ω coaxial cable. In both cases, they operate at a data-rate of up to 1.0 Gbit/s (S800).



The dongles give users the flexibility to determine the best cable lengths for their applications. The transceiver contains an equalizer that is fully adaptive that adjusts to a variety of cable lengths as well as age and environmental conditions like temperature, without any need for programming. The dongles have a standard 1394b 9-pin connector on one end and a 75Ω BNC or 50Ω SMA connector on the opposite end.

These dongles are ideal for laboratory and industrial applications, such as machine vision and factory automation, where robust cabling is required. They can also be used with high-flex, small-diameter coaxial cable with rotating joints, if necessary, for applications where multiple rotations are required.

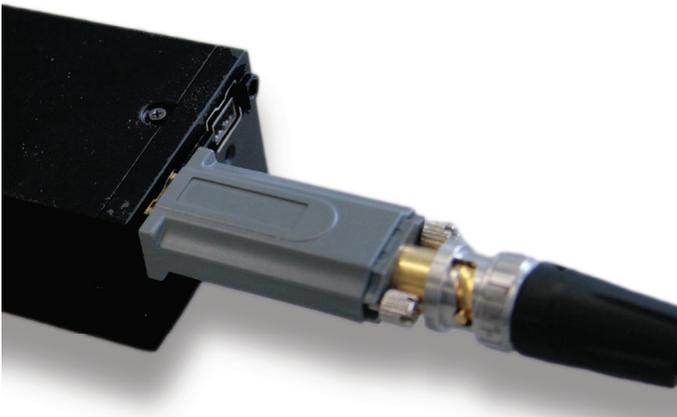

**MICROCHIP**

## Technical Specifications

IEEE 1394b Interface	
Connector	9-Pin 1394b
Coax Interface/Cable	
EQCO-FW5001: 50Ω	50Ω rated SMA
EQCO-FW7501: 75Ω	75Ω rated BNC
Power Over Cable	
Max. Voltage	32V (1394b Bus voltage)
Max. Current	1.0A (limited by coax dongle linear power supply)
Max. Transmitted Power	32W (before cable losses)
Power Supply to Remote Device	
Voltage Available	V <sub>IN</sub> (bus voltage) –1V-Coax DC drop (varies with cable type/length)
Environmental	
Operating Temperature	0°C to +50°C
Relative Humidity	Up to 85% non-condensing
Storage Temperature	–20°C to +70°C

## Performance Specifications

### Performance by Product and Cable Type

(All cable information at S800/1.0 Gbit/s data-rate)	EQCO-FW7501 (75Ω)	EQCO-FW5001 (50Ω)
RG174	50Ω/2.8 mm dia	15 meters/49 feet
RTK	50Ω/2.8 mm dia	25 meters/81 feet
RG58	50Ω/5 mm dia	30 meters/67.5 feet
RG179	75Ω	20 meters/65 feet
RG59	75Ω	40 meters/130 feet
RG6	75Ω/5 mm	60 meters/195 feet



**MICROCHIP**  
[www.microchip.com](http://www.microchip.com)

Visit our web site for additional product information and to locate your local sales office.

Microchip Technology Inc. • 2355 W. Chandler Blvd. • Chandler, AZ 85224-6199

**Microcontrollers • Digital Signal Controllers • Analog • Memory • Wireless**