



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

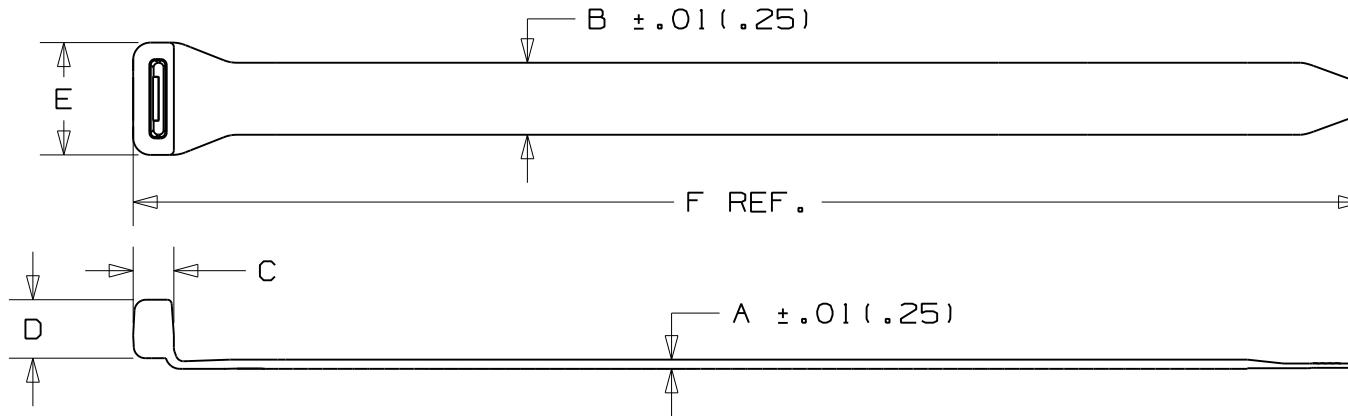

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs (N)	WEIGHT lbs/100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)								
ERT2M-CXX	.38 (9.7)	2.35 (59.7)	.090 (2.29)	.500 (12.70)	.323 (8.20)	.406 (10.31)	.841 (21.36)	8.5 (216)	18 (80)	1.39 (633)
ERT3M-CXX	.38 (9.7)	3.0 (76.2)	.090 (2.29)	.500 (12.70)	.323 (8.20)	.406 (10.31)	.841 (21.36)	11.0 (279)	18 (80)	1.71 (776.3)
ERT4.5M-CXX	.38 (9.7)	4.5 (114)	.090 (2.29)	.500 (12.70)	.323 (8.20)	.406 (10.31)	.841 (21.36)	16.0 (406)	18 (80)	2.41 (1093.1)

* ERTXM-CXX

COLOR
 QUANTITY IN PACKAGE
 C = 100
 PART NUMBER

XX	COLOR
20	BLACK

NOTES:

1. SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
2. MATERIAL FLAMMABILITY RATING: UL94V-0
3. HALOGEN FREE
4. PART IS RELEASABLE AND REUSABLE
5. PRODUCT IS RoHS COMPLIANT.
6. BLACK COLOR PROVIDES GREATER RESISTANCE TO DAMAGE CAUSED BY ULTRAVIOLET LIGHT - INDOOR OR OUTDOOR USE

CAD FILENAME/LAYERS W10001CK/07	
PANDUIT CORP. TINLEY PARK, ILLINOIS	
ELASTOMERIC CABLE TIES	
UNLESS OTHERWISE SPECIFIED, US NOMINAL DIMENSIONAL TOLERANCES ARE: (.X) ± .1(2.5) (.XXX) ± .02(0.51) (.XX) ± .02(0.5) ANGLES ± - - -	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.
DRAWN BY ERW	MAT'L: TPU
DATE 12/26/07	SCALE NONE
CHK'D TGS	DRAWING NO. SS-27570
	DWG SIZE A

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
7	3/11/09	MJVE	BoBk	ADDED NOTE 6	SS-27570	7	BoBk	