



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CHEMTRONICS

Technical Data Sheet

TDS # 1051

Freez-It[®] Antistat

PRODUCT DESCRIPTION

Freez-It[®] Antistat is engineered for locating thermal intermittent electrical components or cooling printed circuit boards with minimal static generation. This circuit refrigerant system is nonflammable, residue-free and provides fast cooling action.

- Minimal static generation
- Nonflammable
- High heat transfer
- Low static generation
- Noncorrosive
- Lowers temperature to -60°F (51°C)
- Ultra pure, filtered to <0.2 microns
- Leaves no residue
- Nonabrasive on most surfaces
- Dries fast
- Contains no CFCs or HCFCs

TYPICAL APPLICATIONS

Freez-It[®] Antistat can be used to:

- Cool Equipment for Testing
- Dissipate Heat While Soldering or Desoldering
- Isolate Thermal Intermittent Components
- Test Circuit Traces for Continuity
- Test Printed Circuit Boards for Stress Fractures
- Track Static Sensitive Components

TYPICAL PRODUCT DATA AND PHYSICAL PROPERTIES

Boiling Point	-15.7°F
Vapor Density (air=1) @ 77°F	3.18
Solubility in Water @ 77°F /1 atm	1.0% by weight
Specific Gravity (water = 1 @77°F)	1.21
Evaporation Rate (butyl acetate=1)	>1
Appearance	Clear, Colorless Liquified Gas
Odor	Slight Ethereal
Surface Tension (dynes/cm @ 77°F)	7.8
Shelflife	10 years
Flash Point (TCC)	None

COMPATIBILITY

Freez-It[®] Antistat is generally compatible with most materials used in printed circuit board fabrication, including sensitive plastics and compounds. With any circuit refrigerant, compatibility must be determined on a non-critical area prior to use.

<u>Material</u>	<u>Compatibility</u>
Buna-N	Fair
Graphite	Good
HDPE	Good
LDPE	Good
Lexan™	Poor
Neoprene	Good
Cross-Linked PE	Good
Polyacrylate	Poor
Polystyrene	Good
PVC	Good
Silicone Rubber	Fair
Teflon™	Good
Viton™	Poor


TECHNICAL & APPLICATION ASSISTANCE

Chemtronics provides a technical hotline to answer your technical and application related questions. The toll free number is:

1-800-TECH-401.

ENVIRONMENTAL IMPACT DATA

ENVIRONMENTAL IMPACT DATA			
CFC	0.0%	VOC	0.9%
HCFC	0.0%	HFC	99.1%
CL Solv.	0.0%	ODP	0.0

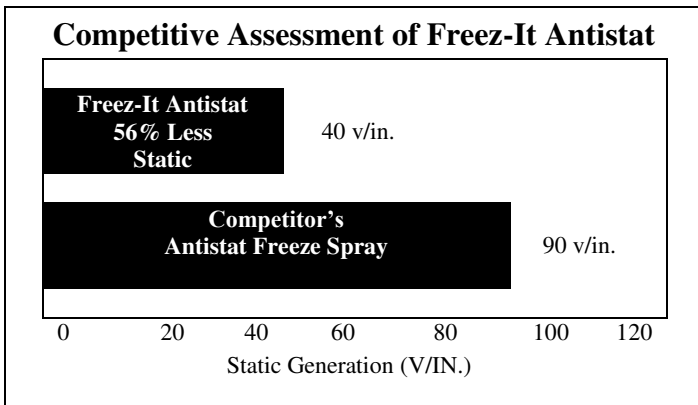

CFC, HCFC, CL. SOLV., VOC, and HFC numbers shown are the content by weight. Ozone depletion potential (ODP) is determined in accordance with the Montreal Protocol and U.S. Clean Air Act of 1990. The ODP of this product is 0.0. It is the sum of the ODP of the substances that may contribute to the depletion of stratospheric ozone, based upon the weight of each substance in the product's formulation.

NOTE:

This information is believed to be accurate. It is intended for professional end users having the skills to evaluate and use the data properly. CHEMTRONICS does not guarantee the accuracy of the data and assumes no liability in connection with damages incurred while using it.

USAGE INSTRUCTIONS

For industrial use only.

Read MSDS carefully prior to use.

No special surface preparation is required prior to using Freez-It® Antistat. Direct spray onto the area to instantly cool components, circuit boards or adhesives. For optimum performance and pin point control, use Freez-It® Antistat with the attached extension tube.

AVAILABILITY

ES1051 10 oz. Aerosol

ES1551 15 oz. Aerosol

CHEMTRONICS

8125 COBB CENTER DRIVE

KENNESAW, GA 30152

1-770-424-4888

REV. F (12/17)

DISTRIBUTED BY: