

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

	WIRE RANGE , AWG [mm²]	DIMENSIONS in. [mm]			
PANDUIT PART #		L± .02	B DIA.± .01	C± .01	
ES18B	#22-18	.62	.14	.032	
	[0,5-1,0]	[15,7]	[3,6]	[0,8]]	
ES14B	#16-14	.62	.16	.032	
	[1,5-2,5]	[15,7]	[4,1]	[0,8]]	
ES10B	#12-10	.63	.22	.040	
	[4,0-6,0]	[16,0]	[5,6]	[1,02]	

NOTES:

- 1. USED FOR:
 - A. SOLID OR STRANDED COPPER WIRE
 - B. 302°F [150°C] MAX TEMPERATURE RATING
 - C. 2000V MAX VOLTAGE
- 2. INSTALLATION TOOLS:
 - A. UL LISTED AND CSA CERTIFIED: CT-100A, CT-200, CT-600A (CT-570CH), CT-1570, CT-2500(CT-2570CH)
 - B. PANDUIT APPROVED: CT-160, CT-260
- 3. WIRE STRIP LENGTH: $9/32^{"}$ $^{+1/32}_{-0}$ [7,1mm $^{+0,8}_{-0}$]
- 4. MATERIAL: COPPER, TIN PLATED
- 5. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- 6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

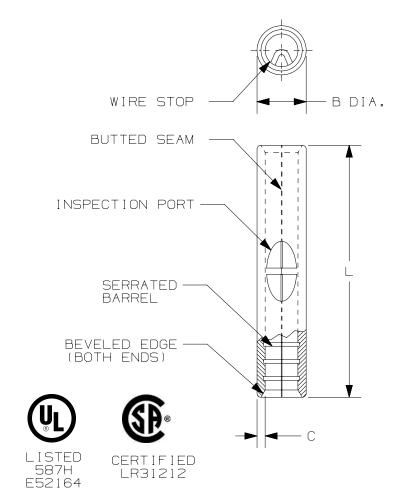

ŀ								TITLE
								STRONGHOLD BUTT SPLICE
4 [NON-INSULATED, BUTTED SEAM #22-10 AWG
								CUSTOMER DRAWING
								O0123SHB/00
-								00123SHB/00 DATASET FILE NAME 00123SHB_DC/00A
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]
								.x:.1[2.54] .xxx:.005[.13] SEE NOTES
NA/12	00	10.5.17	TMR	JHNU	RGB	DRAWING RELEASED	00123SH	THIRD ANGLE PROJECTION SH41338
D10100D/	REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TMR 10.5.17 CHK SCALE N.T.S SHEET 1 OF 1