



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CHEMTRONICS

Technical Data Sheet

TDS # 1664T

Static Free™ Mat & Benchtop Reconditioner

PRODUCT DESCRIPTION

Static Free™ Mat & Benchtop Reconditioner is an excellent surface treatment specifically engineered for use in ESD sensitive environments. Static Free™ Mat & Benchtop Reconditioner penetrates and lifts light oils, fingerprints and flux residues from surfaces while providing static dissipative protection.


- Excellent for use on nonporous opaque surfaces
- Will not dry mat surfaces with repeated use
- Safe for use on most fabrics
- Long-lasting dissipative protection; up to 30 days
- Effective in relative humidities below 15%
- Chloride and amine free formulation
- Noncorrosive
- Meets static decay criteria of MIL-B-891705C
- Nonflammable
- Safe on surfaces not harmed by water
- Nonabrasive

TYPICAL APPLICATIONS

Static Free™ Mat & Benchtop Reconditioner cleans and adds static dissipative protection to:

- Benchtops and Storage Cabinets
- Production/Assembly Surfaces
- Static Dissipative/Antistatic Mats
- Many porous and non-porous materials
- Tool Cribs

TYPICAL PRODUCT DATA AND PHYSICAL PROPERTIES

Specifications and Physical Properties	
Appearance	Clear Liquid
Odor	Pleasant/Clean
Specific Gravity (@ 77°F (25°C))	0.997 g/ml
pH	6.0
Flashpoint (TCC)	None to Boiling
Shelflife	2 years after opening
VOC* Content:	
CARB	5%
SCAQMD	50 g/L
Federal	5%
RoHS/WEEE Status	

COMPATIBILITY

Static Free™ Mat & Benchtop Reconditioner is excellent for use on most surfaces not harmed by water. As with any cleaning product, compatibility must be determined on a non-critical area prior to use.

AVAILABILITY

ES1664T 16 fl. oz. Trigger Spray
ES3264 32 fl. oz. Trigger Spray
ES164 1 gallon

<u>Material</u>	<u>Compatibility</u>
ABS	Excellent
Buna-N	Excellent
EPDM	Excellent
Graphite	Excellent
HDPE	Excellent
Kynar™	Excellent
LDPE	Excellent
Lexan™	Excellent
Neoprene	Excellent
Nylon™ 66	Excellent
Cross-Linked PE	Excellent
Polypropylene	Excellent
Polystyrene	Excellent
PVC	Excellent
Silicone Rubber	Excellent
Teflon™	Excellent
Viton™	Excellent

TECHNICAL & APPLICATION ASSISTANCE

Chemtronics provides a technical hotline to answer your technical and application related questions. The toll free number is:

1-800-TECH-401.

ENVIRONMENTAL IMPACT DATA

ENVIRONMENTAL IMPACT DATA			
CFC	0.0%	VOC	5.0%
HCFC	0.0%	HFC	0.0%
CL Solv.	0.0%	ODP	0.0

CFC, HCFC, CL. SOLV., VOC, and HFC numbers shown are the content by weight. Ozone depletion potential (ODP) is determined in accordance with the Montreal Protocol and U.S. Clean Air Act of 1990. The ODP of this product is 0.0. It is the sum of the ODP of the substances that may contribute to the depletion of stratospheric ozone, based upon the weight of each substance in the product's formulation.

NOTE:

This information is believed to be accurate. It is intended for professional end users having the skills to evaluate and use the data properly. CHEMTRONICS does not guarantee the accuracy of the data and assumes no liability in connection with damages incurred while using it.

Chemtronics® is registered trademarks of Chemtronics. All rights reserved. Static Free™ is a trademark of Chemtronics. All rights reserved. All other trademarks herein are trademarks or registered trademarks of their respective owners.

CHEMTRONICS

8125 COBB CENTER DRIVE


KENNESAW, GA 30152

1-770-424-4888

REV. G (08/13)

Static Free™ Mat & Benchtop Reconditioner

STATIC DECAY RATE IN SECONDS

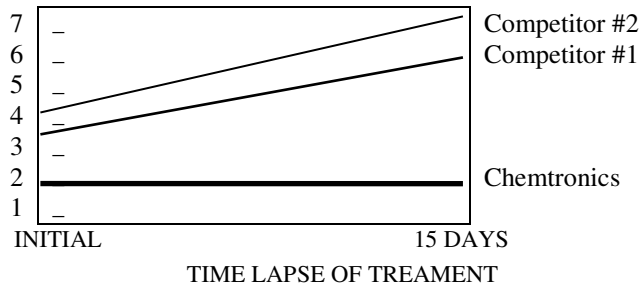

Atmospheric Conditions: 12% RH

USAGE INSTRUCTIONS

For industrial use only.

Read MSDS carefully prior to use.

Spray generously 6-12 inches from surface to be treated. Allow product to penetrate.

Surfaces can be wiped clean with

Chemtronics® Controlwipes™ or

Twillwipes™.

DISTRIBUTED BY: