



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



3D Slide Switches

Japan

Type: **ESE157**



Multiple features activated by one-touch operation


■ Features

- This is a multi-functional switch that combines a self-returning switch and push-on switch.
- This switch realizes high-density mountability for devices.
- Easy operation by thumb is available for various types of portable equipment.

■ Recommended Applications

- Mobile Communications Equipment
(menu-scroll and enter functions)
- Portable Visual Equipment
(volume and tone control for remote control)


■ Explanation of Part Numbers



■ Major Specifications

Electrical	Power Rating		50 μ A 3 Vdc to 1 mA 10 Vdc
	Contact Resistance		1 Ω max.
	Insulation Resistance		100 Vdc 100 M Ω min.
	Dielectric With Standing Voltage		1 minute at 100 Vac
	Bouncing		10 ms max.
Mechanical	Circuit Diagram	Slide Mode	1-pole 2-throws (Center off)
		Push Mode	1-pole 1-throw (Center normal open)
	Travel	Slide Mode	1.25 mm
		Push Mode	0.5 mm
	Operating Force	Slide Mode	0.8 N \pm 0.4 N
		Push Mode	1.6 N \pm 0.8 N
Minimum Quantity/Packing Unit			1400 pcs. (Reel Pack)
Quantity/Carton			2800 pcs.

■ Dimensions in mm (not to scale)

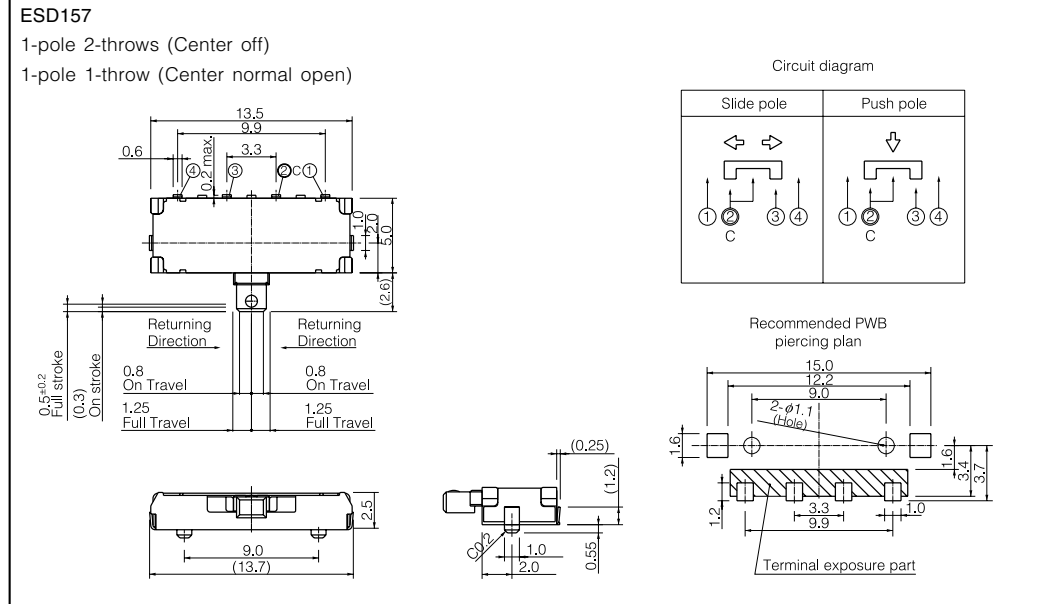

■ Packaging Specifications

Standard Reel Dimensions in mm (not to scale)

