



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### Evaluating the **AD7175-2** 24-Bit, 250 kSPS, Sigma-Delta ADC with 20 $\mu$ s Settling and Integrated Analog Input Buffers

#### FEATURES

- Full featured evaluation board for the AD7175-2
- PC control in conjunction with the SDP (see [EVAL-SDP-CB1Z](#) from Analog Devices, Inc. for additional information)
- PC software for control and data analysis (time domain)
- Standalone capability

#### EVALUATION KIT CONTENTS

- EVAL-AD7175-2SDZ evaluation board
- Evaluation software CD
- 7 V to 9 V ac-to-dc adapter

#### EQUIPMENT NEEDED

- DC signal source

#### GENERAL DESCRIPTION

The EVAL-AD7175-2SDZ evaluation kit features the [AD7175-2](#), a 24-bit, 250 kSPS analog-to-digital converter (ADC) with integrated rail to rail analog input buffers, on-board power supply regulation, and an external amplifier section for amplifier evaluation. A 7 V to 9 V ac-to-dc adapter is regulated to 5 V and 3.3 V; this supplies the [AD7175-2](#) and support components. The [EVAL-AD7175-2SDZ](#) board connects to a USB port via the system demonstration platform (SDP) [EVAL-SDP-CB1Z](#) controller board.

The [EVAL-AD7175-2SDZ](#) evaluation software fully configures the [AD7175-2](#) device functionality via a user accessible register interface and provides dc time domain analysis in the form of waveform graphs, histograms, and associated noise analysis for ADC performance evaluation.

#### FUNCTIONAL BLOCK DIAGRAM

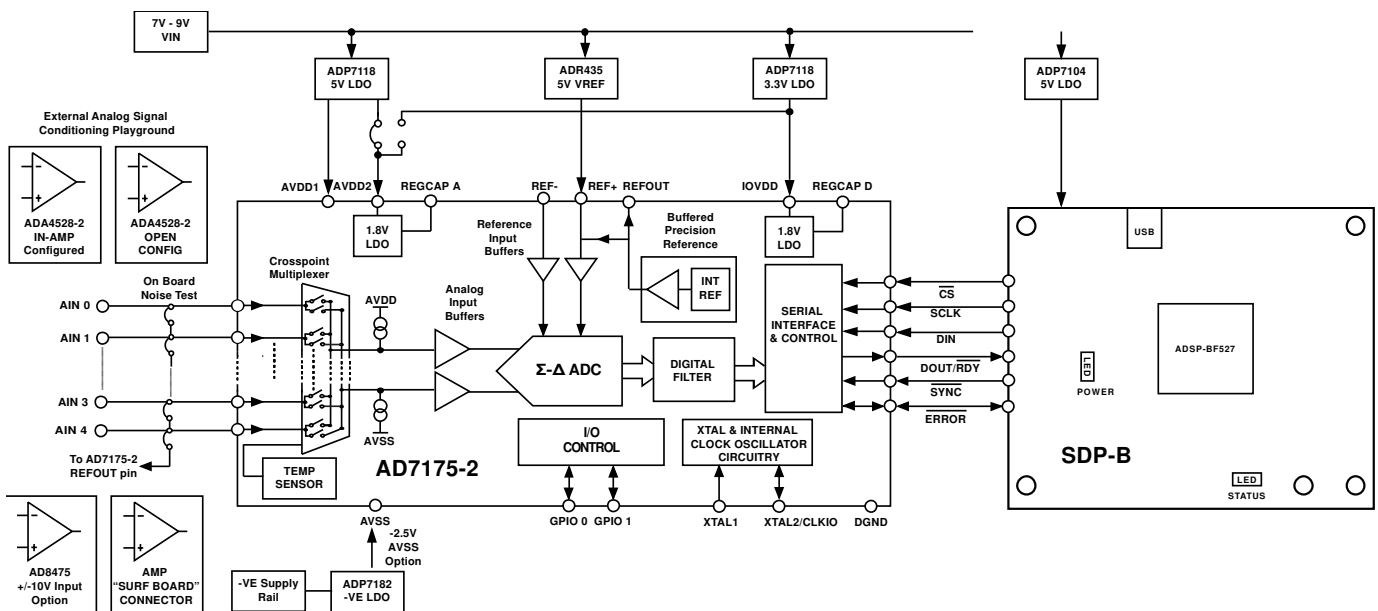


Figure 1. EVAL-AD7175-2SDZ Block Diagram

**TABLE OF CONTENTS**

Features .....	1	Power Supplies.....	5
Evaluation Kit Contents.....	1	Power Supply Configurations.....	6
Equipment Needed.....	1	Analog Inputs.....	6
General Description.....	1	Reference Options.....	6
Functional Block Diagram .....	1	Evaluation Board Software.....	7
Revision History .....	2	Software Installation .....	7
EVAL-AD7175-2SDZ Quick Start Guide.....	3	Launching the Software.....	7
Recommended Quick Start Guide .....	3	Software Operation .....	8
Quick Start Noise Test .....	3	Overview of the Main Window.....	8
Evaluation Board Hardware.....	4	Configuration Tab (1).....	8
Device Description.....	4	Waveform Tab (8).....	9
Hardware Link Options.....	4	Histogram Tab (19).....	10
Sockets and Connectors .....	5	Register Map Tab (22).....	11
Serial Interface .....	5	Exiting the Software.....	11

**REVISION HISTORY**

10/14—Revision Pr.A: Initial Preliminary Version

## EVAL-AD7175-2SDZ QUICK START GUIDE

### RECOMMENDED QUICK START GUIDE

Follow these steps to set up the board:

1. Disconnect the [SDP-B](#) board from the USB port of the PC. Install the [EVAL-AD7175-2SDZ](#) software from the enclosed CD. Restart the PC after installation.
2. Connect the [EVAL-SDP-CB1Z](#) board to the [EVAL-AD7175-2SDZ](#) board, as shown in Figure 2.
3. Fasten the two boards with the enclosed plastic screw washer set.
4. Connect the external 9 V power supply to Connector J5 of the [EVAL-AD7175-2SDZ](#) board as shown in Figure 2. Set LK2 to Position B.
5. Connect the SDP board to the PC via the USB cable. For Windows® XP, you may need to search for the SDP drivers. Choose to automatically search for the drivers for the [SDP-B](#) board if prompted by the operating system.
6. Launch the [EVAL-AD7175-2SDZ](#) software from the Analog Devices subfolder in the **Programs** menu.

### QUICK START NOISE TEST

Use the following procedure to quickly test the noise performance:

1. Insert Link LK5 to Link LK9 to initiate the noise performance test mode. In this mode, analog input channels short to the REFOUT pin.
2. Click **Start Sampling** to acquire samples from the ADC (see Figure 7).

The **Samples** numeric control in the top right corner of the main window sets the number of samples collected in each batch.

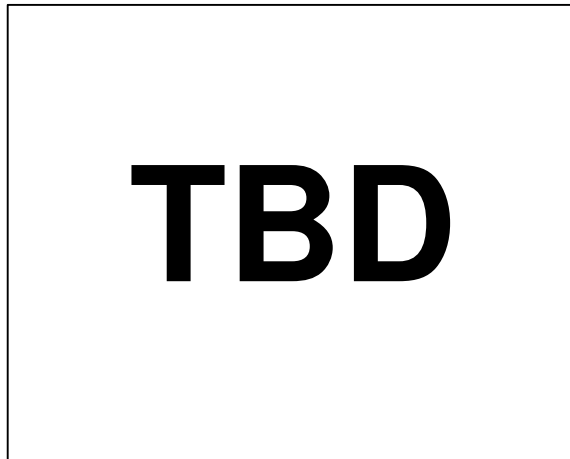


Figure 2. Hardware Configuration, Setting Up the [EVAL-AD7175-2SDZ](#)

## EVALUATION BOARD HARDWARE

### DEVICE DESCRIPTION

The [AD7175-2](#) is a highly accurate, high resolution, multiplexed, 2-/4-channel (fully differential/single-ended)  $\Sigma$ - $\Delta$  ADC. The [AD7175-2](#) has a maximum channel-to-channel scan rate of 50 kSPS (20  $\mu$ s) for fully settled data. The output data rates range from 5 SPS to 250 kSPS. The device includes integrated rail to rail analog input and reference input buffers, an integrated precision 2.5 V reference, and an integrated oscillator.

See the [AD7175-2](#) data sheet for complete specifications. Consult the data sheet in conjunction with this user guide when

using the evaluation board. Full details for the [EVAL-SDP-CB1Z](#) are available on the Analog Devices website.

### HARDWARE LINK OPTIONS

See Table 1 for default link options. By default, the board is configured to operate from the supplied 9 V ac-to-dc adapter connected to connector J5. The 5 V supply required for the [AD7175-2](#) comes from the on-board low dropout regulator (LDO). The [ADP7118](#), with a 5 V output voltage, receives its input voltage from J3 or J5 (depending on the position of LK2) and generates a 5 V output.

**Table 1. Default Link and Solder Link Options**

Link	Default Option	Description
LK1	A	Selects the voltage applied to the power supply sequencer circuit (U3); dependent on AVDD1. Place in Position A if using 5 V AVDD1, or Position B if using 2.5 V AVDD1.
LK2	B	Selects the external power supply from Connector J3 (Position A), or J4 (Position B).
LK5 to LK9	Inserted	Inserting these links sets up the on-board noise test. In this mode, all inputs short to the common voltage via SL11.
SL1	A	Sets the voltage applied to the AVDD2 pin. Operates using the AVDD1 supply (default). Position B sets the AVDD2 voltage to 3.3 V supply from the <a href="#">ADP7118</a> (3.3 V) (U10) regulator.
SL2	A	Selects between an external or on-board AVDD1 source. Supplies AVDD1 from the <a href="#">ADP7118</a> (5 V) (U7) (default).
SL3	A	Selects between an external or on-board AVSS source. Supplies AVSS from the <a href="#">ADP7182</a> (-2.5 V) (U4) (default).
SL4	A	Connects AIN4 to: A4 / J6 (Position A), REFOUT pin on the <a href="#">AD7175-2</a> (Position B) or AVSS (Position C). Positions B and C are used to simplify using a single ended input source.
SL5	B	Selects between an external or on-board IOVDD source. Supplies IOVDD from the <a href="#">ADP7118</a> (3.3 V) (U10) (default). The evaluation board operates with a 3.3 V logic.
SL8	A	Routes A0 to: AIN0 pin on the <a href="#">AD7175-2</a> (Position A), Buffer/Inamp U8 (Position B), Funnel Amp U9 with gain of 0.8x (Position C) or J10-1 (Position D).
SL9	A	Routes A2 to: AIN2 pin on the <a href="#">AD7175-2</a> (Position A), Buffer U12 (Position B) or Funnel Amp U9 gain of 0.4x (Position C).
SL10	A	Routes A3 to: AIN3 pin on the <a href="#">AD7175-2</a> (Position A), Buffer U12 (Position B) or Funnel Amp U9 gain of 0.4x (Position C).
SL11	A	Routes A1 to: AIN1 pin on the <a href="#">AD7175-2</a> (Position A), Buffer/Inamp U8 (Position B), Funnel Amp U9 with gain of 0.8x (Position C) or J10-7 (Position D).
R49 to R51	Inserted	Connects AVSS and AGND for single-supply operation. To operate in split supply mode, remove these links.

## SOCKETS AND CONNECTORS

Table 2. Connector Details

Connector	Function	Connector Type	Manufacturer	Manufacturer Number	Order Code <sup>1</sup>
J1	Connector to the <a href="#">EVAL-SDP-CB1Z</a>	120-way connector, 0.6 mm pitch	Hirose	FX8-120S-SV(21)	FEC1324660
J2	External MCLK Input	Straight PCB mount SMB/SMA jack	Tyco	1-1337482-0	Not applicable
J3	External bench top voltage supply for the <a href="#">EVAL-AD7175-2SDZ</a>	Power socket block, 3-pin, 3.81 mm pitch	Phoenix Contact	MC 1,5/ 3-G-3,81	FEC3704737
J5	External ac-to-dc adapter input for the <a href="#">EVAL-AD7175-2SDZ</a> , 7 V to 9 V	DC power connectors, 2 mm SMT power jack	Kycon	KLDX-SMT2-0202-A	MOUSER 806-KLDX-SMT20202A
J6	Analog input terminal block; wired connection to external source or sensor	Power socket block, 8-pin, 3.81 mm pitch	Phoenix Contact	MC 1,5/ 8-G-3,81	FEC3704774
J9	External bench top voltage supply option for AVDD1/AVDD2, IOVDD and AVSS inputs on the <a href="#">AD7175-2</a>	Screw terminal block, 3.81 mm pitch	Phoenix Contact	MKDS 1/4-3.81	FEC3704592
J10	Optional header	7-way, 2.54 mm pin header	Samtec	SSW-107-01-T-S	FEC1803478
J13	Optional header	7-way, 2.54 mm socket	Samtec	TLW-107-05-G-S	FEC1668499
A0 to A4	Analog inputs to ADC	Straight PCB mount SMB/SMA jack	Tyco	1-1337482-0	Not applicable
A7	PMOD Compatible Header	6-Pin SIL Header (0.1" pitch)	Harwin	20-9990646	FEC 1022255

<sup>1</sup> Order codes starting with FEC are for Farnell.

## SERIAL INTERFACE

The [AD7175-2](#) evaluation board connects via the serial peripheral interface (SPI) to the Blackfin® [ADSP-BF527](#) on the [EVAL-SDP-CB1Z](#). There are four primary signals:  $\overline{CS}$ , SCLK, and DIN (all inputs), and one output from the ADC,  $\overline{DOUT/RDY}$ .

To operate the [EVAL-AD7175-2SDZ](#) in standalone mode, disconnect the evaluation board from the [SDP-B](#) controller board. Use the test points to connect the signals to an alternative digital capture setup or the PMOD compatible header (A7).

## POWER SUPPLIES

Power the evaluation board from the ac-to-dc adapter connected to J5, or from an external bench top supply applied to J3 or J9. Linear LDOs generate the required voltages from the applied input voltage ( $V_{IN}$ ) rail when using J3 or J5. Use J9 to bypass the on-board regulators. An [ADP7118](#) regulator is used to generate the 5 V (single supply) and 2.5 V (split supply) supplies for the AVDD1 and AVDD2 rails to the ADC; a second [ADP7118](#) generates 3.3 V for the IOVDD rail. The [ADP7104](#) supplies 5 V for the [SDP-B](#) controller board as well as 5 V for the ADM660 voltage converter to generate -5 V to supply the [ADP7182](#). The [ADP7182](#) generates the -2.5 V supply for AVSS when operating in split supply mode. Each supply is decoupled where it enters the board and again at each device in accordance with the schematic. Table 3 shows the various power supply configurations available, including split supply operation.

Table 3. Power Supply Configurations<sup>1</sup>

Configuration	Input Voltage Range	Description
Single Supply (Regulated)	7 V to 9 V	The 7 V to 9 V input is regulated to 5 V for AVDD1/AVDD2 and 3.3 V for IOVDD. This also powers the external 5 V reference. See the Single Supply (Regulated) section in the Power Supply Configurations section.
Single Supply (Unregulated)	7 V to 9 V, 5 V, and 3.3 V	The input is unregulated and connects directly to AVDD1/AVDD2 and IOVDD from J5. The 7 V to 9 V input powers the external 5 V reference. See the Single Supply (Unregulated) section in the Power Supply Configurations section.
Split Supply (Regulated)	7 V to 9 V and –2.5 V	The 7 V to 9 V input is regulated to 2.5 V for AVDD1/AVDD2 and 3.3 V for IOVDD. The 7 V to 9 V input powers the external 5 V reference, and the –2.5 V input is connected to AVSS directly (unregulated). See the Split Supply (Regulated) section in the Power Supply Configurations section.
Split Supply (Unregulated)	7 V to 9 V, ±2.5 V, and 3.3 V	The input is unregulated and connects directly to AVDD1/AVDD2 and IOVDD from J5. The 7 V to 9 V input powers the external 5 V reference. See the Split Supply (Unregulated) section in the Power Supply Configurations section.

<sup>1</sup> Only one configuration can be used at a time.

## POWER SUPPLY CONFIGURATIONS

### Single Supply (Regulated)

There are two available power supply options for the single supply (regulated) configuration.

- An ac-to-dc adapter (included) connected to J5. Set LK2 to Position B.
- A bench top power supply connected to J3. Set LK2 to Position A and ensure that AVSS = AGND = 0 V.

Set all other links and solder links to the default settings as outlined in Table 1.

### Single Supply (Unregulated)

To set up the board, use the following procedure:

1. Move SL2 and SL5 to Position A.
2. Connect the two terminals of J9 labeled AGND and AVSS.
3. Connect 0 V (GND) to J9 at the terminal labeled AGND.
4. Connect 5 V to J9 at the terminal labeled AVDD.
5. Connect 3.3 V to J9 at the terminal labeled IOVDD.
6. Connect the 7 V to 9 V input to J5.

Set all other links and solder links to the default settings as outlined in Table 1.

### Split Supply (Regulated)

To set up the board, use the following procedure:

1. Remove R49 to R51. These links connect AVSS to AGND.
2. Insert a zero ohm resistor for R85.
3. Set LK1 to Position B. This sets the input to the power monitor circuitry to work with the lower AVDD1 supply of 2.5 V.
4. Connect a bench top power supply to J5 and set LK2 to Position B.
5. Set LK1 to Position B. This sets the input to the power monitor circuitry to work with the lower AVDD1 supply of 2.5 V.

Set all other links and solder links to the default settings as outlined in Table 1.

### Split Supply (Unregulated)

To set up the board, use the following procedure:

1. Move SL2, SL3 and SL5 to Position A.
2. Remove R49-R51.
3. Connect 0 V (GND) to J9 at the terminal labeled AGND.
4. Connect 2.5 V to J9 at the terminal labeled AVDD.
5. Connect –2.5 V to J9 at the terminal labeled AVSS.
6. Connect 3.3 V to J9 at the terminal labeled IOVDD.
7. Connect 7 V to 9 V to J5.
8. Set LK1 to Position B. This sets the input to the power monitor circuitry to work with the lower AVDD1 supply of 2.5 V.

Set all other links and solder links set to the default settings as outlined in Table 1.

## ANALOG INPUTS

The [EVAL-AD7175-2SDZ](#) primary analog inputs can be applied in two separate ways.

- J6 connector on the left side of the board
- A0 to A4 SMB/SMA footprints on the evaluation board

The analog inputs route directly to the associated analog input pins on the [AD7175-2](#), provided that the LK5 to LK9 links (on-board noise test) are removed. The [EVAL-AD7175-2SDZ](#) software is set up to analyze dc inputs to the ADC. The [AD7175-2](#) input buffers work for dc input signals.

## REFERENCE OPTIONS

The [EVAL-AD7175-2SDZ](#) includes an external 5 V reference, the [ADR445](#). The [AD7175-2](#) includes an internal 2.5 V reference. The default operation is to use the external reference input, which is set to accept the 5 V [ADR445](#) on the evaluation board.

## EVALUATION BOARD SOFTWARE SOFTWARE INSTALLATION

The EVAL-AD7175-2SDZ evaluation kit includes software on a CD. Click the **setup.exe** file from the CD to run the installer.

The default installation location for the software is **C:\Program Files\Analog Devices\EVAL-AD7175-2SDZ\**.

Install the evaluation software before connecting the evaluation board and EVAL-SDP-CB1Z board to the USB port of the PC. This ensures that the evaluation system is correctly recognized when connected to the PC.

There are two parts to the installation.

- AD7175-2 evaluation board software installation
- EVAL-SDP-CB1Z system demonstration platform board drivers installation

Place the software and drivers in the appropriate locations by proceeding through all of the installation steps. Connect the EVAL-SDP-CB1Z board to the PC only after the software and drivers install. The installer may prompt you to allow the program to make changes to the computer. Click **Yes** to proceed (see Figure 3).



Figure 3. AD7175-2 User Account Control Permission Dialog Box

You may receive a security warning as part of the SDP-B controller board driver installation. Click **Install** to proceed with the installation of the driver (see Figure 4). Without this confirmation, the software cannot operate correctly.



Figure 4. EVAL-SDP-CB1Z Drivers Installation Confirmation Dialog Box

After installation is complete, connect the EVAL-AD7175-2SDZ to the EVAL-SDP-CB1Z, as shown in Figure 2. Connect the

EVAL-SDP-CB1Z board via the USB cable to the computer. Follow these steps to verify the SDP-B controller board driver is installed and working correctly:

1. Allow the **Found New Hardware Wizard** to run.
2. Once the drivers are installed, check that the board has connected correctly by looking at the **Device Manager** of the PC. The **Device Manager** can be found by right clicking **My Computer**, selecting **Manage**, then **Device Manager** from the list of **System Tools** (see Figure 5).
3. The **EVAL-SDP-CB1Z** board appears under **ADI Development Tools** as **Analog Devices System Development Platform** or similar. The installation is complete.



Figure 5. Device Manager

### LAUNCHING THE SOFTWARE

The AD7175-2 software can be launched when the EVAL-AD7175-2SDZ and EVAL-SDP-CB1Z are correctly connected to the PC.

To launch the software, complete the following:

1. From the **Start** menu, click **Programs, Analog Devices,** then **EVAL-AD7175-2SDZ**. The main window of the software then displays (see Figure 7).
2. If the AD7175-2 evaluation system is not connected to the USB port via the EVAL-SDP-CB1Z when the software is launched the "Select Interface..." dialog box appears. Connect the evaluation board to the USB port of the PC, wait a few seconds, click the green arrows to rescan the USB ports. Once connected then click work online to proceed.

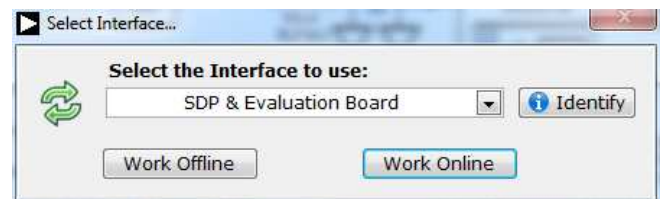


Figure 6. Select Interface Dialog Box



## SOFTWARE OPERATION

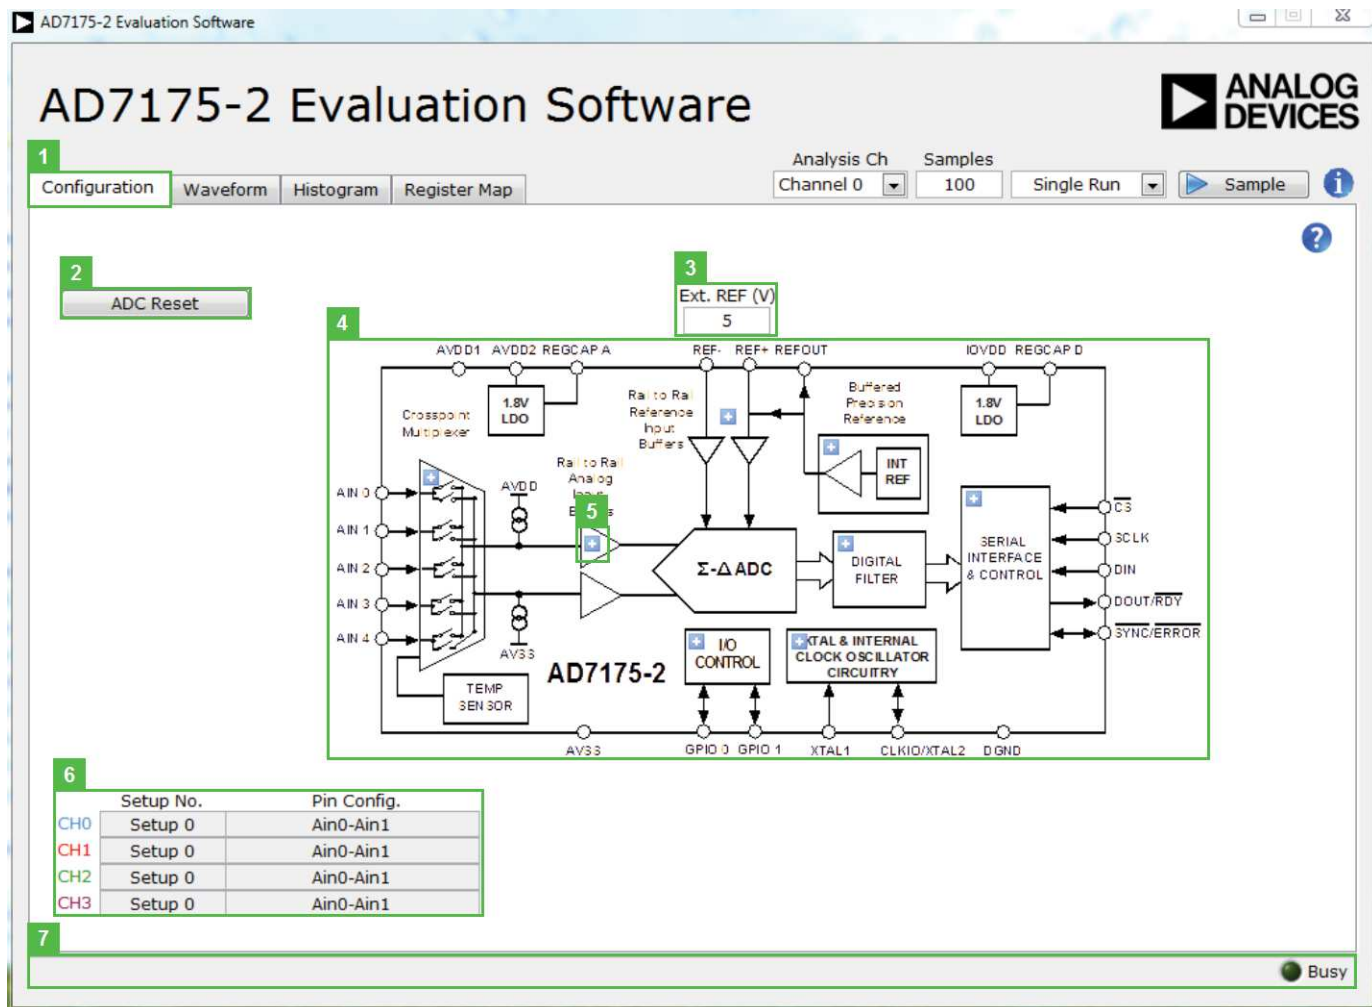


Figure 7. Configuration Tab of the AD7175-2 Evaluation Board Software

### OVERVIEW OF THE MAIN WINDOW

The main window of the software displays the significant control buttons and analysis indicators of the AD7175-2 evaluation board software (see Figure 7). This window is divided into four tabs.

#### CONFIGURATION TAB (1)

##### ADC Reset (2)

Click **ADC Reset** to perform a software reset of the AD7175-2. There is no hardware reset pin. Perform a hard reset by removing power to the board. The software reset has the same effect as a hard reset.

##### Ext. Ref (3)

Sets the external reference voltage used for calculating the results on the Waveform and Histogram tabs. The evaluation board has an external 5 V ADR445 reference but this can be

bypassed and so you can change the external reference voltage value here to ensure correct calculation of results on the Waveform and Histogram tabs.

##### Functional Block Diagram (4)

This is the functional block diagram of the ADC showing each of the separate functional blocks within the ADC. Clicking on one of the configuration buttons on this graph will open the configuration popup window for that block. Not all blocks will have a configuration button.

##### Configuration Popup Button (5)

This is one of the configuration popup buttons. Each button will open a different window allowing for configuration of the relevant functional block.

**Channel Configuration Overview (6)**

This section shows the channel configuration including setup and analog inputs. This allows for a quick check of how the ADC is setup.

**Status Bar (7)**

This section display status updates such as **Analysis Completed** and **Reset Completed** during software use as well as the software version and busy indicator.

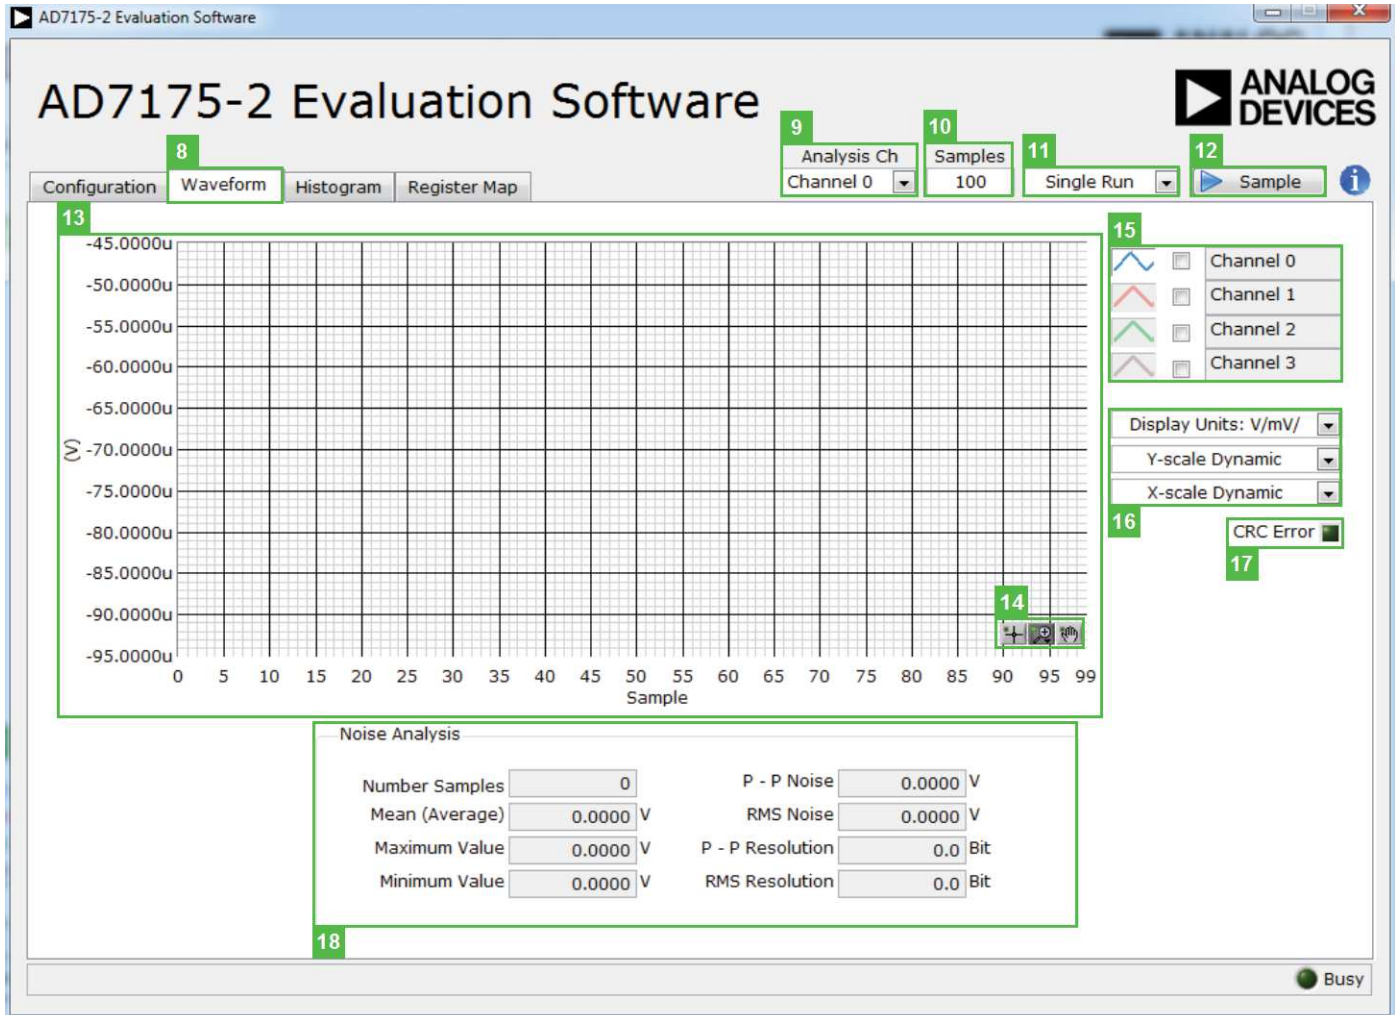


Figure 8. Waveform Tab of the AD7175-2 Evaluation Board Software

**WAVEFORM TAB (8)**

**Analysis Channel (9)**

The Noise Analysis section and Histogram Graph shows the analysis of the channel selected via this Analysis Channel control.

**Samples (10 & 11)**

The **Samples** (10) numeric control and batch control (11) set the number of samples gathered per batch and whether only a single batch of multiple batches of samples are gathered. This is unrelated to the ADC mode. You can capture a defined sample set, or continuously gather batches of samples. In both cases, the number of samples set in the **Samples** (10) numeric input dictates the number of samples.

**Sample (12)**

This starts gathering ADC results. Results appear in the Waveform Graph (13)

**Waveform Graph and Controls(13 & 14)**

The data waveform shows each successive sample of the ADC output. The control toolbar (14) in the graph allows you to zoom in on the data. Change the scales on the graph by typing values into the x-axis and y-axis.

**Channel Selection (15)**

This control allows you to choose which channels display on the data waveform. It also shows the analog inputs for that channel labeled next to the on and off controls. These controls only

affect the display of the channels and do not have any effect on the channel settings in the ADC register map.

**Display Units and Axis Controls(16)**

Click **Display Units** to select whether the data graph displays in units of voltages or codes. This affects both the Waveform Graph and the Histogram Graph. The axis controls can be switched between dynamic and fixed. When “dynamic” is switched on the axis with automatically adjust to show the entire range of the ADC results after each batch of sample. When “fixed” is used the user can program the axis ranges and they will not adjust after each sample batch.

**CRC Error (17)**

This LED icon illuminates when a cyclic redundancy check (CRC) error is detected in the communications between the software and the AD7175-2. The CRC functionality on the AD7175-2 is disabled by default and must be enabled for this indicator to work.

**Noise Analysis (18)**

This section displays the results of the noise analysis for the selected analysis channel. This includes both noise and resolution measurements.

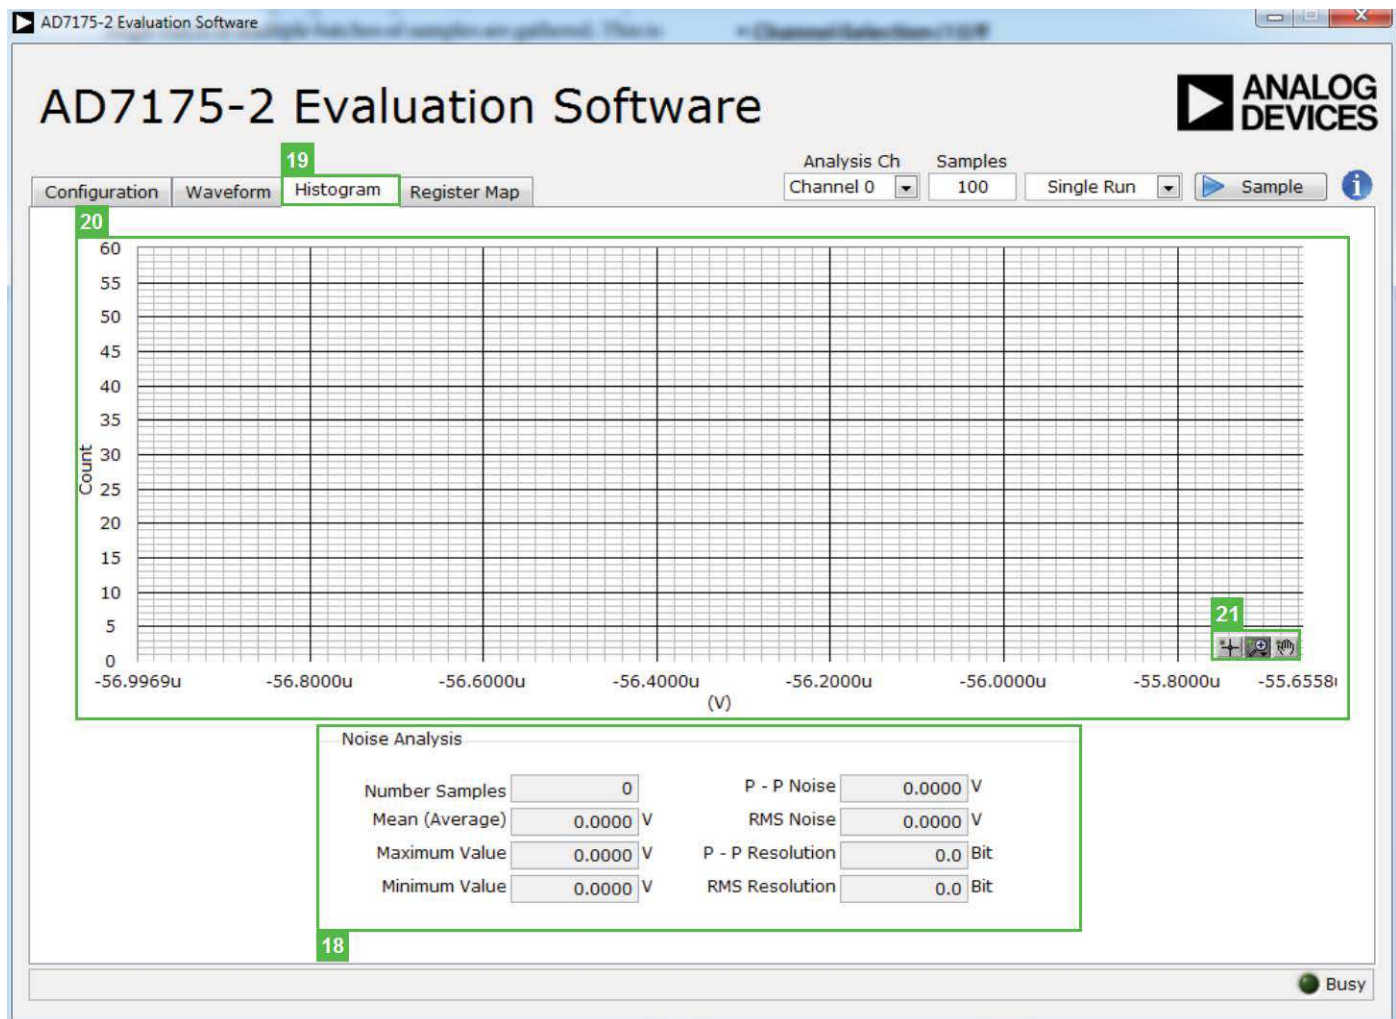


Figure 9. Waveform Tab of the AD7175-2 Evaluation Board Software

**HISTOGRAM TAB (19)**

**Histogram Graph and Controls(20 & 21)**

The data histogram shows each the number of times each sample of the ADC output occurs. The control toolbar (21) in

the graph allows you to zoom in on the data. Change the scales on the graph by typing values into the x-axis and y-axis.

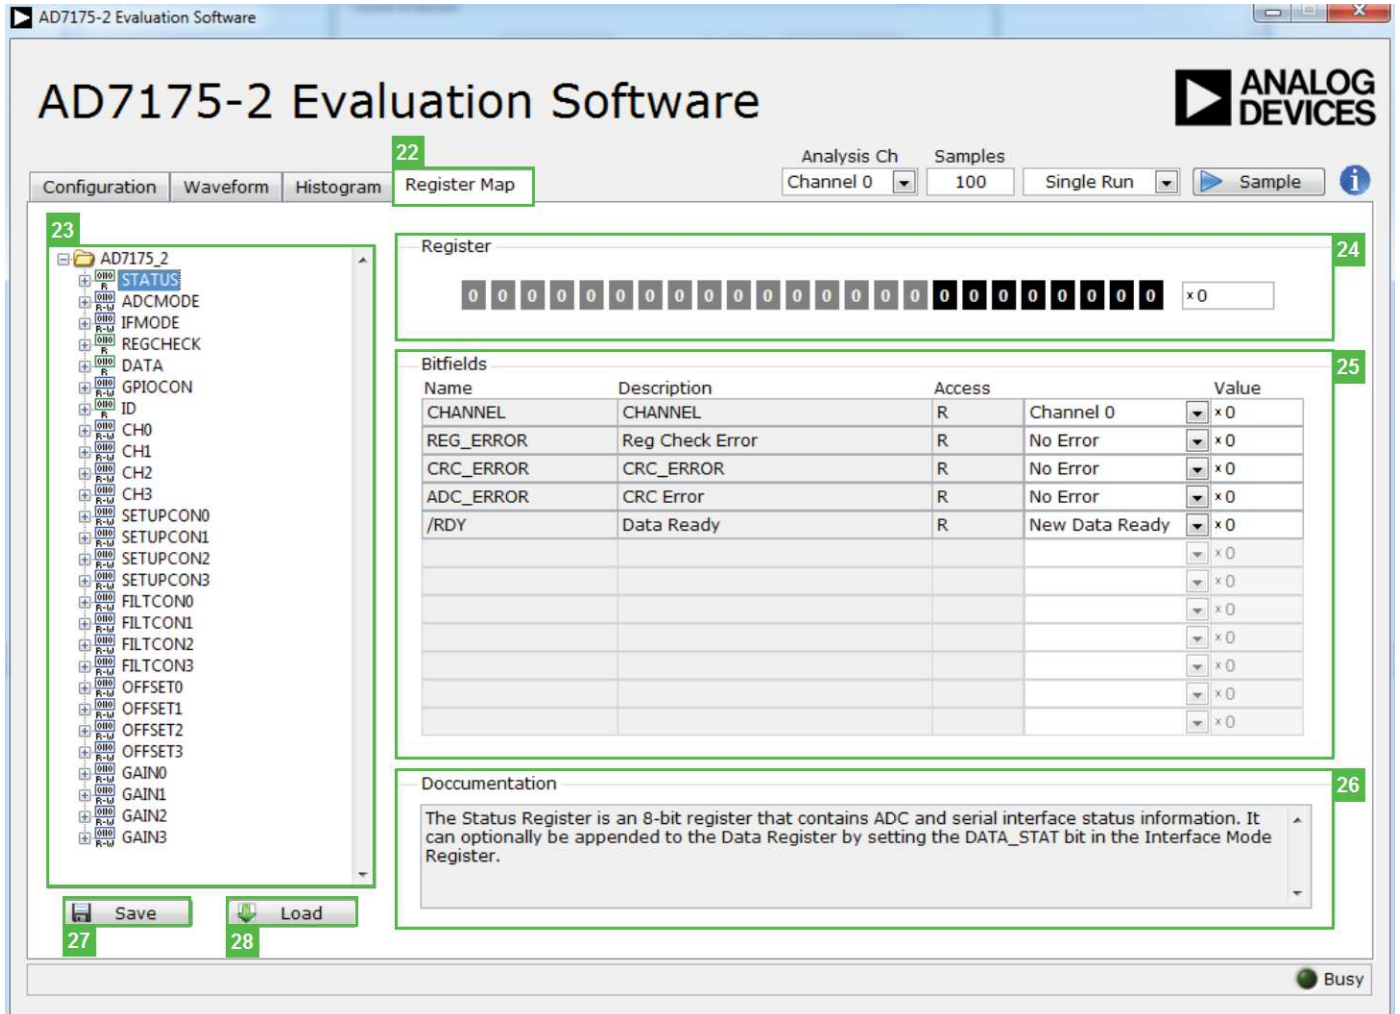


Figure 10. Register Map Tab of the AD7175-2 Evaluation Board Software

**REGISTER MAP TAB (22)**

**Register Tree (23)**

This control show the full register map in a tree control. Each register is shown and clicking on the expand button next to each register will show all the bitfields contained within that register.

**Register Control (24)**

This control allows the user to change the individual bit of the register selected in the Register Tree (23) by clicking on them or program the register value directly into the number control on the right.

**Bitfield List(25)**

This list shown all the bitfields of the register selected in the Register Tree (23). The values can be changed using the drop

down menu or directly entering a value into the number control on the right.

**Documentation (26)**

This field contains the documentation for the register of bitfield selected in the Register Tree (23).

**Save & Load (27 & 28)**

These buttons allow the user to save the current register map setting to a file and load the setting from the same file.

**EXITING THE SOFTWARE**

To exit the software, click the close button at the top, right corner of the main window (see Figure 7).

## NOTES

**ESD Caution**

**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

**Legal Terms and Conditions**

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.

©2014 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.



[www.analog.com](http://www.analog.com)