



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



802.15.4-Modem PAN4561 ETU - Version



Panasonic Electronic Devices Europe GmbH

MODULES
WIRELESS

OUTLINES

The PAN4561ETU is an excellent choice for development environments and production projects where a connector or through hole technology is required. You may remember this unique part by its suffix, "ETU" which is short for "Easy-To-Use". This module is based on Panasonic's PAN4561 extended range RF module and features two, single row, 2mm, header connectors on the bottom side of the module.

PAN4561 module, which is a long range, low power, 2.4 GHz ISM band transceiver which includes a complete 802.15.4 physical layer (PHY) modem, designed for the IEEE 802.15.4 wireless standard and a appropriate microcontroller (MCU).

The RF frontend consists of a power amplifier (PA) and a low-noise amplifier (LNA) for extended range. This module complies with EN300328, FCC CFR Part 15 and ARIB STD-T66.

KEY FEATURES

- size (44.5mm x 39.5mm x 11.3mm)
- interfaces to Panasonic SNAP development kits
- antenna options: SMA port 50Ω, ceramic antenna or plug
- High sensitivity of -105 dBm typ. at 1% Packet Error Rate
- 20 dBm typ. output power
- Low supply voltage (2.7 V to 3.3 V, 3.0 V typ.)
- Operating temperature range -40°C to +85°C
- 60k Flash and 4k RAM memory
- two UARTs and one I²C bus
- 8 channel A/D converter with 10 Bit
- In total 33 digital I/O lines

SOFTWARE OPTIONS

- E-Senza Technologies GmbH and Synapse Wireless Inc.

APPLICATIONS

- Remote control and wire replacement in industrial systems such as wireless sensor networks
- Factory / home automation and motor / lighting control
- Inventory management and RF ID tagging and AMR
- Monitoring (environmental, patient or fitness)

Dipl.-Ing. (FH)

Andreas Griesche

Product Engineer - Wireless Module Project
High Frequency Products Business Group


Panasonic Electronic Devices Europe GmbH
Zeppelinstrasse 19
21337 Lüneburg, Germany

Tel. (49)-4131-899-322

Fax (49)-4131-899-210

Andreas.Griesche@eu.panasonic.com

DIMENSIONS

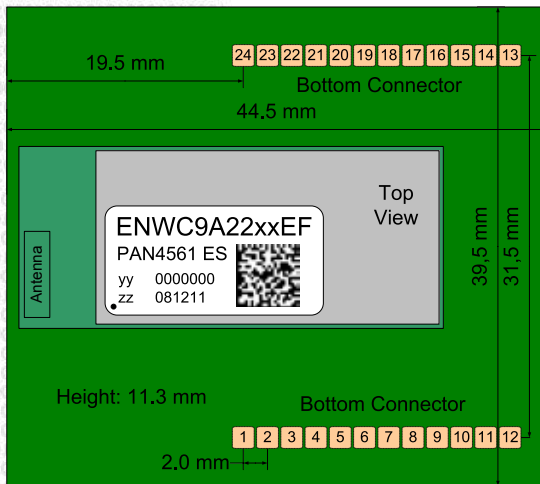

Pin no.	Pin name	Pin no.	Pin name
1	GND	13	AD1P7
2	TPM1CH2	14	XTAL
3	SCL1	15	EXTAL
4	SDA1	16	TPM2CH3
5	RXD1	17	TPM2CH1
6	TXD1	18	AD1P2
7	PTC5	19	AD1P1
8	KBI1P5	20	AD1P0
9	RXD2	21	VCC
10	TXD2	22	BKGND
11	KBI1P6	23	/RESET
12	KBI1P7	24	GND

Note:

Module pin names and the internal MC1321x pin names correspond to one another.

The PAN4561ETU is compatible to Panasonic SNAP and most Synapse Wireless Inc. development kits.

TECHNICAL CHARACTERISTICS

Parameter	Value	Condition / Note
Receiver Sensitivity	-105 dBm typ.	for 1% packet error rate
Output Power	20 dBm	typical
Power Supply	2.7 V to 3.3 V	single supply, 3.0 V typ.
Power Control Range	30 dB	
Maximum Data Rate	250kbps	over the air
Current Consumption	receive mode transmit mode idle mode standby mode sleep mode off mode	53 mA typ. 210 mA typ. 1.6 mA typ. 36.3 µA typ. 2,2 µA typ. 0,55 µA typ.
Operating Temperature Range	-40°C to +85°C	@output power max no CLK0

Notes:

All parameters are valid for $V_{cc} = 3.0V$ and $T_{amb} = 25^{\circ}C$.

Freescale's MC13213 is included in the module and Mode Definitions and Transition Times for saving battery life. Also the derivative MC13212 and MC13211 as well a pin compatible non-PA/LNA version (PAN4560) are available.