



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# RT8497A Evaluate Report for Non-isolation Floating Buck LED Driver (Internal T8)

---

*May. 2016*

**RICHTEK**  
your power partner.

# RT8497A Brief Introduction

---

RT8497A is a active power factor correction controller, specifically designed for using as a constant current LED driver.

Supporting : Non-isolation(Buck mode)

**Applications**    **➔**    **AC/DC LED lighting driver**



PAR Lamp



E27 Bulb



T5/T8 Tube

# RT8497A Features

---

## High Efficiency BCM LED Driver Controller for High Power Factor Offline Applications


- Built-in Power MOSFET
- High Power Factor and THDi
- Constant LED current with Highly Precision Current regulation
- Extremely Low Quiescent Current Consumption.
- True Low System BOM Cost
- Unique Programmable AND pin for ZVS Setting to Achieve Best power Efficiency
- Universal Input Voltage Range with Off-Line Topology

# RT8497A Advantage

---

- Tight LED Current Regulation
- Low BOM Cost
- Protection:
  - a. Built-in Over Thermal Protection
  - b. Built-in Over Voltage Protection
  - c. Output LED String Open protection
  - d. Output LED String Short protection
  - e. Output LED Over Current protection

# Circuit

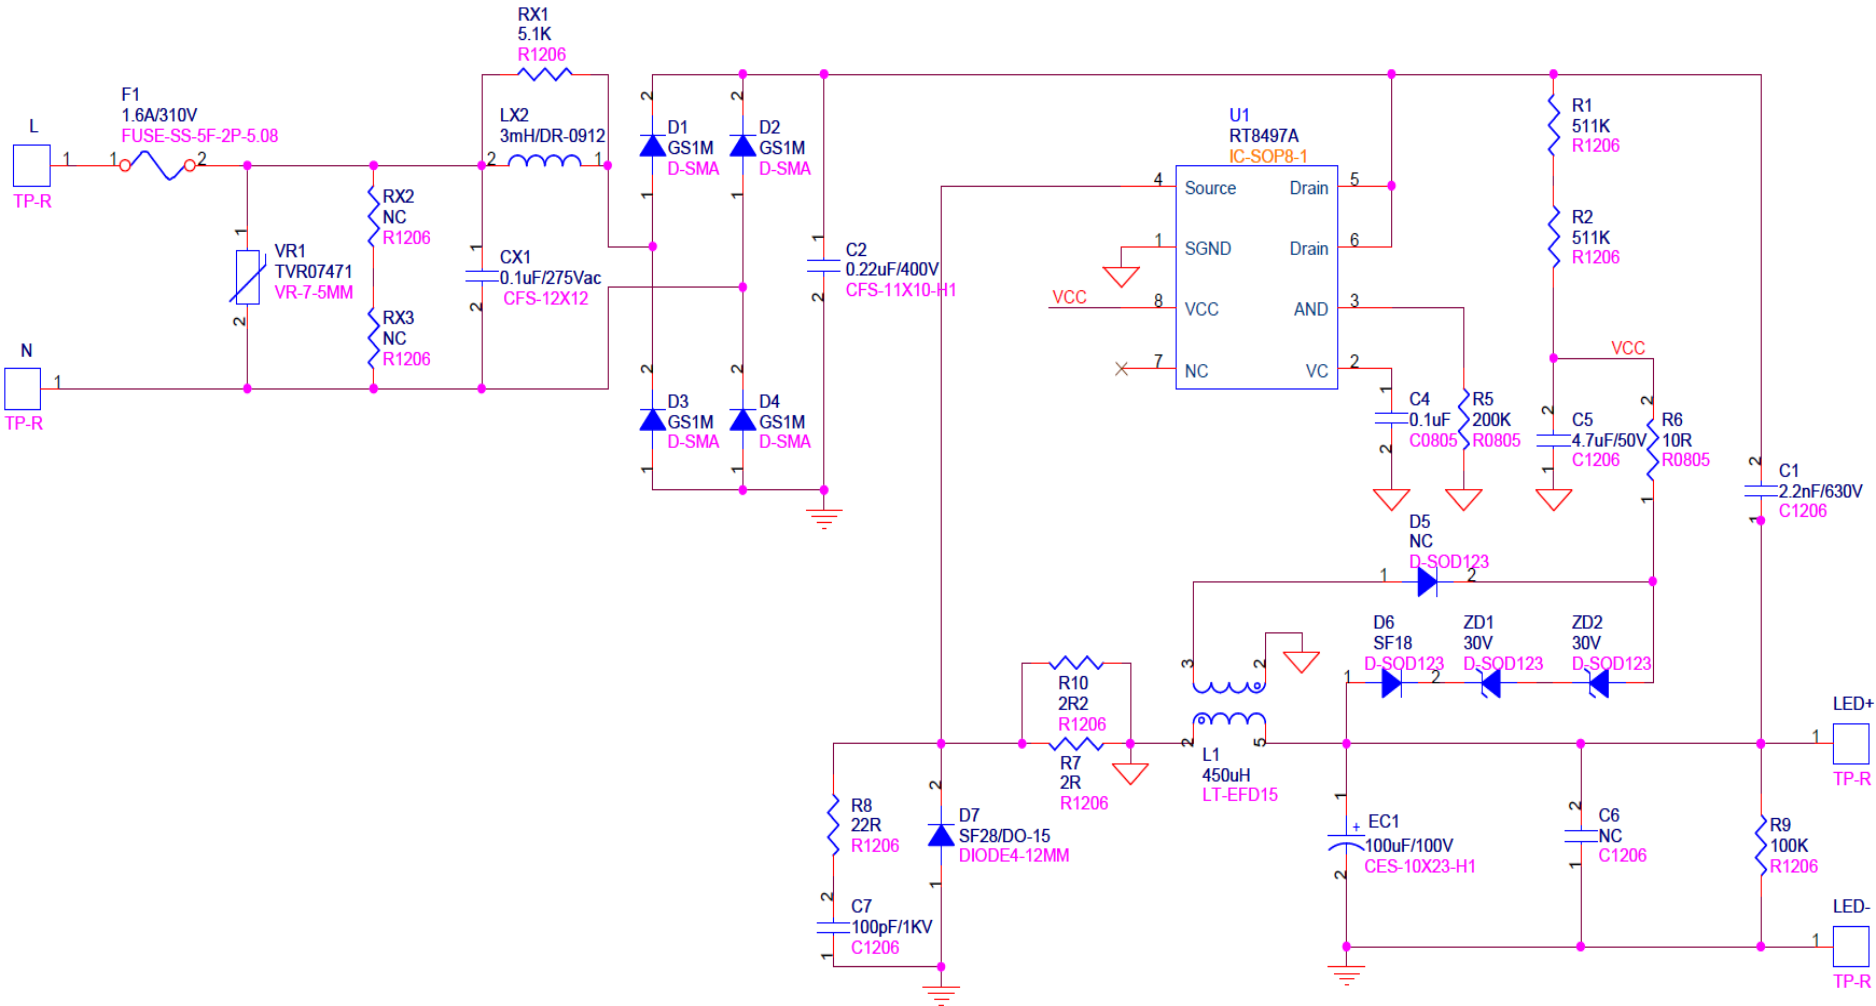

# Electrical Performance

Load: LED Series

Line filter on

Frequency	Vac [V]	Pin [watt]	Vout[V]	Iout[mA]	Pout [watt]	Total Eff. [%]	PF Value	THD [%]
60Hz	90	19.108	78.70	222	17.448	91.31%	0.909	44.88
60Hz	100	19.045	78.60	223	17.496	91.87%	0.932	37.92
60Hz	110	19.023	78.60	223	17.544	92.22%	0.945	33.39
60Hz	132	19.043	78.60	224	17.630	92.58%	0.959	27.03
50Hz	195	19.234	78.50	225	17.647	91.75%	0.961	19.18
50Hz	220	19.299	78.50	225	17.631	91.36%	0.951	18.44
50Hz	230	19.303	78.50	224	17.600	91.18%	0.946	18.41
50Hz	240	19.328	78.50	224	17.592	91.02%	0.939	18.49
50Hz	264	19.415	78.50	224	17.560	90.45%	0.921	19.20


current regulation = 1.38%

 $\Delta$  Efficiency = 2.13%

Maximum PFC = 0.961


Minimum PFC = 0.909

# Efficiency

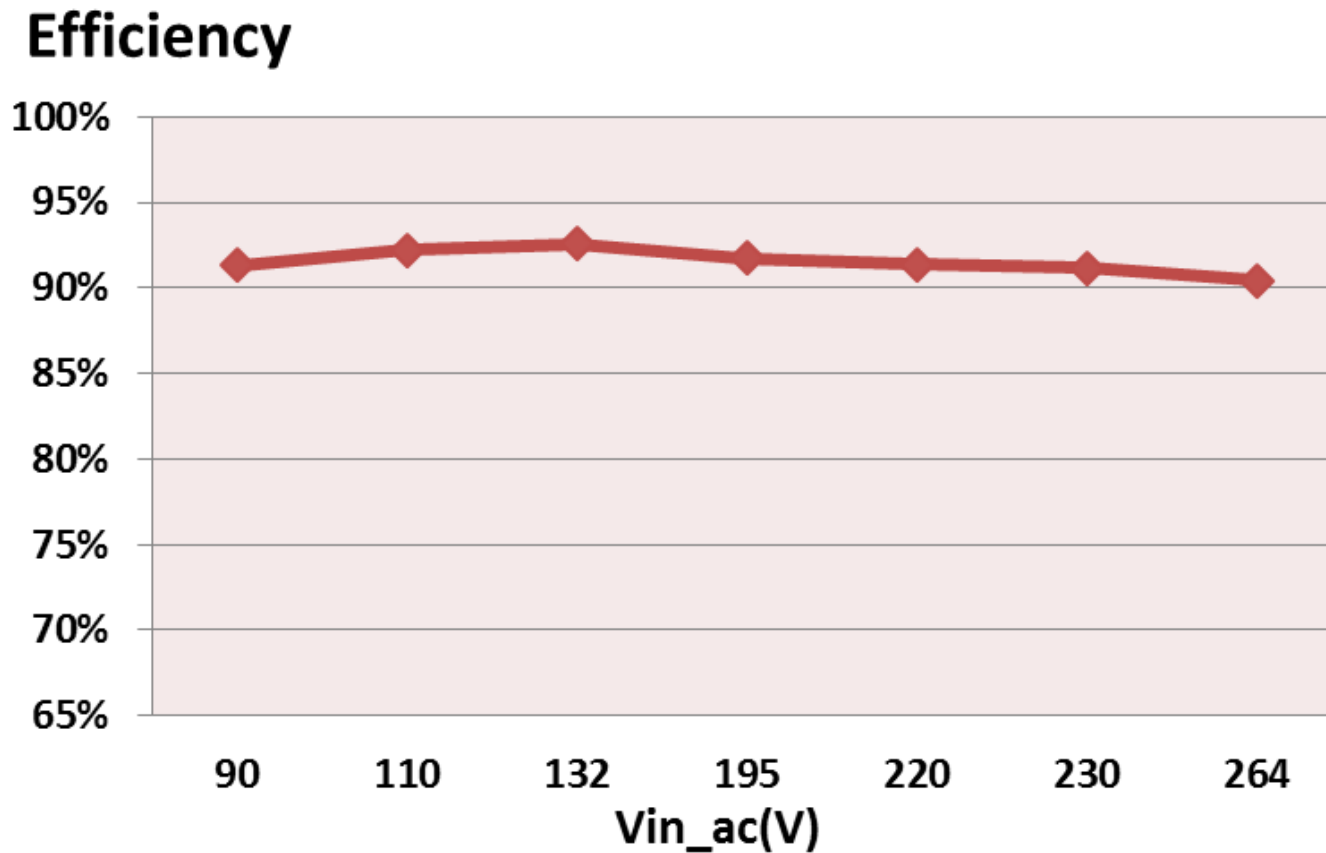




# Power Factor

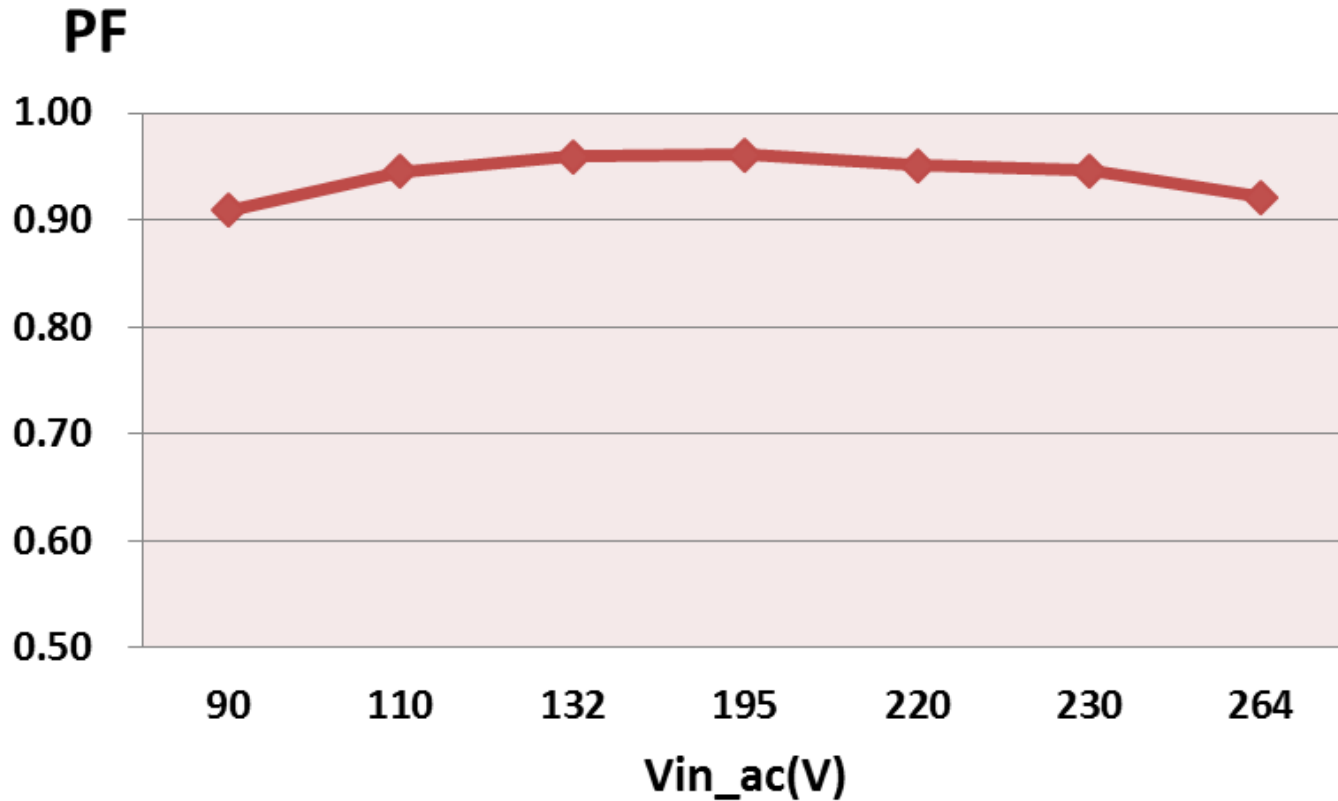

# Current Regulation

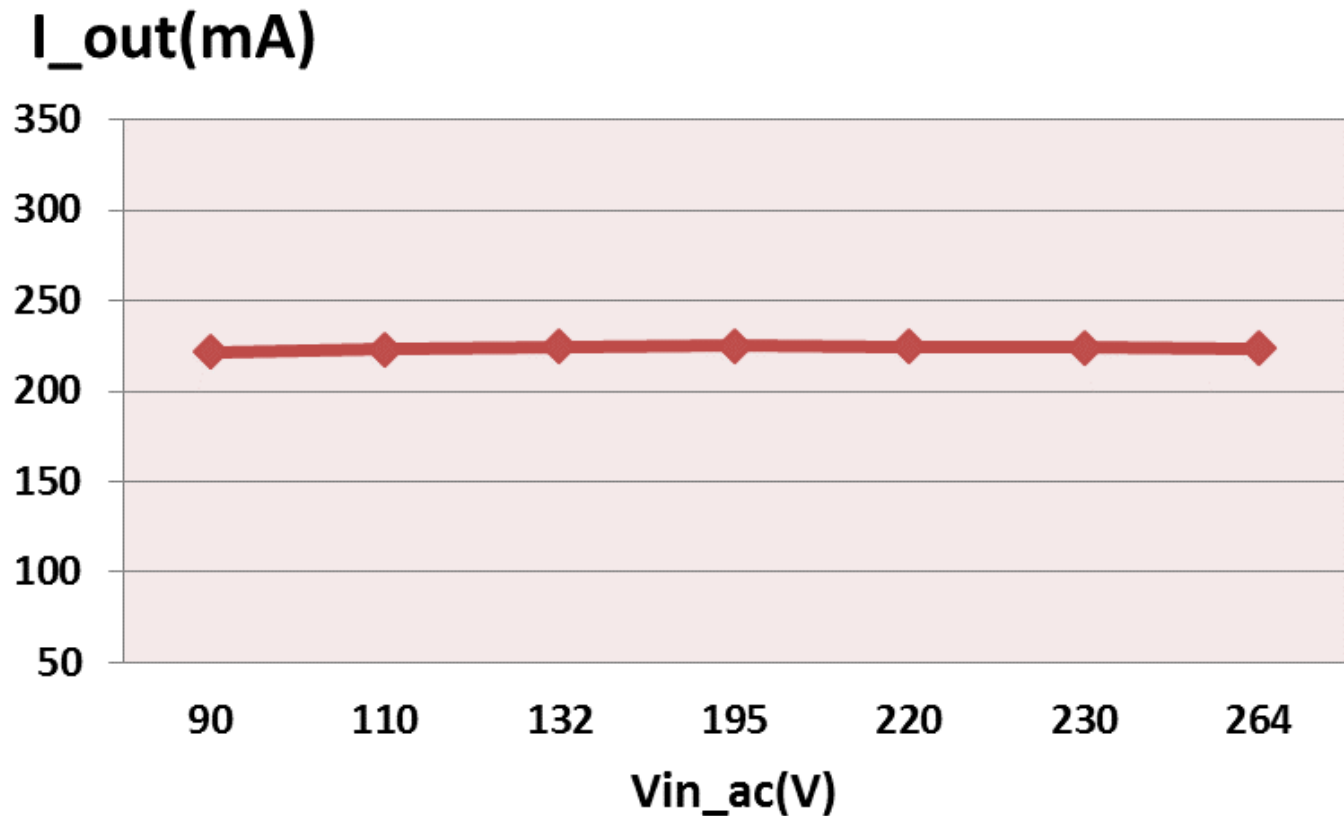

# Temperature

(Test Condition: Burn-in 30min. @ Ta=25 °C)

90Vac/60Hz input


F1	Fuse, MST, T2A/300V	26.8
CX1	X-cap, HQX, 104/250V	32.7
LX2	DR0912, 3mH	50.7
D1~D4	GS1M (1A/1000V)	53.2
C2	Film cap, 224/450V	44.7
U1	RT8497A	63.3
C1	1206, 2.2nF/630V	49.2
C5	1206, 4.7uF/50V	49.3
R7,R10	1206, 2.2 ohm	52.5
D6	ES1J (1A/600V)	48.5
ZD1	BZT55C30 (30V, 0.5W)	53
D7	SF28 (2A/600V)	49.2
L1 (core)	EFD-15, 450uH	47.5
L1 (wire)		48.1
EC1	E-cap, 100uF/100V	28.5

264Vac/50Hz input


F1	Fuse, MST, T2A/300V	22.6
CX1	X-cap, HQX, 104/250V	27.8
LX2	DR0912, 3mH	37.1
D1~D4	GS1M (1A/1000V)	50.1
C2	Film cap, 224/450V	46.6
U1	RT8497A	72.3
C1	1206, 2.2nF/630V	52.1
C5	1206, 4.7uF/50V	53.2
R7,R10	1206, 2.2 ohm	61.1
D6	ES1J (1A/600V)	59.5
ZD1	BZT55C30 (30V, 0.5W)	68.2
D7	SF28 (2A/600V)	59.4
L1 (core)	EFD-15, 450uH	70.4
L1 (wire)		71.4
EC1	E-cap, 100uF/100V	48.7

# PCB Layout

## TOP Layer

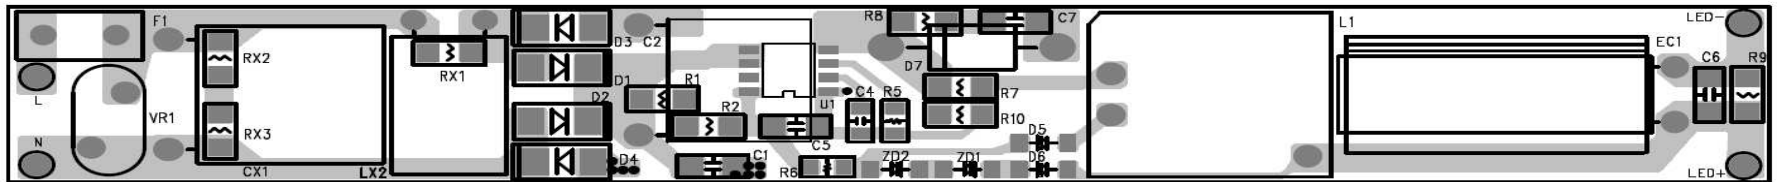

## BOT Layer

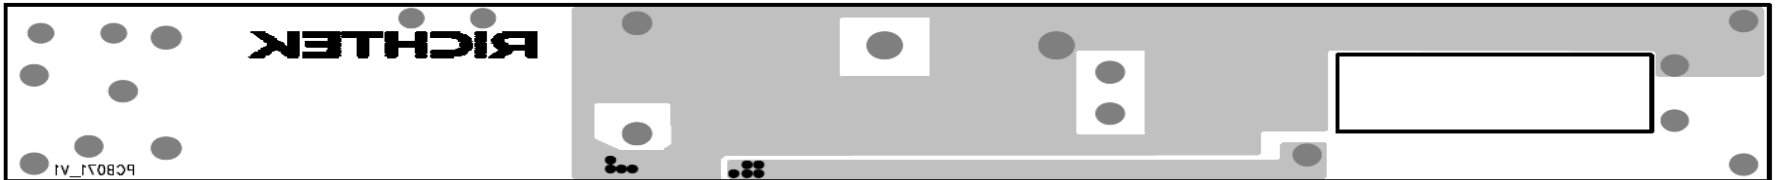


PCB No : PCB071\_V1

# Demo Board Photo

L

LED-

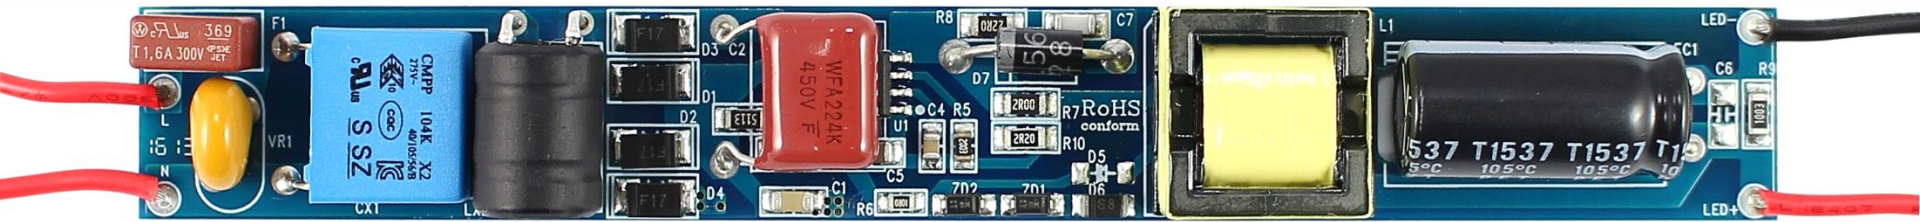

N

LED+

Length	Width	Height
123mm	16mm	12mm

# BOM



Item	Location	Value	Type
1	CX1	0.1uF/275Vac	CFS-12X12
2	C1	2.2nF/1kV	C1206
3	C2	0.22uF/450V	CFS-11X10-H1
4	C4	0.1uF	C0805
5	C5	4.7uF/50V	C1206
6	C7	100pF/1kV	C1206
7	D1, D2, D3, D4	GS1M	D-SMA
8	D6	SF18	D-SOD123
9	D7	SF28/DO-15	DIODE4-12MM
10	EC1	100uF/100V	CES-10X23-H1
11	F1	1.6A/300V	FUSE-SS-5F-2P-5.08
12	LX2	3mH/DR-0912	LDS-D8X10

# BOM

Item	Location	Value	Type
13	L1	450uH	LT-EFD15
14	RX1	5.1k	R1206
15	R1, R2	511k	R1206
16	R5	200k	R0805
17	R6	10R	R0805
18	R7	2R	R1206
19	R8	22R	R1206
20	R9	100k	R1206
21	R10	2R2	R1206
22	U1	RT8497AGS	SOP-8
23	VR1	TVR07471	VR-7-5MM
24	ZD1, ZD2	30V	D-SOD123

# Transformer

Vender : 豐達  
 CORE SIZE: EFD-15      Material: PC40  
 Bobbin/PINs: Horizontal/ 8 pins  
 Primary inductor: (+-10%) 450uH  
 Leakage inductor: N/A  
 Test condition: 1kHz/1V  
 Varnish : Yes

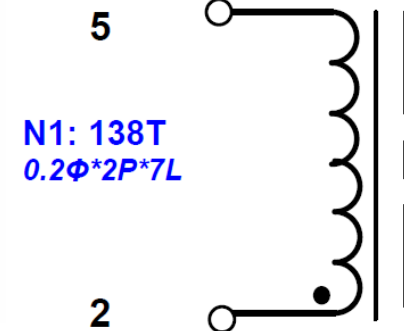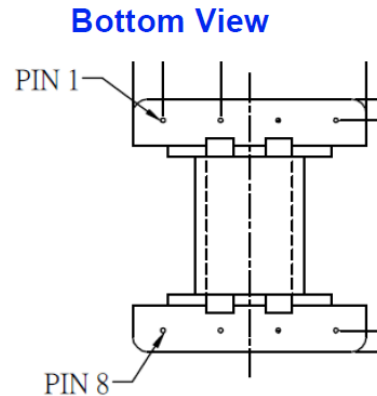

## WINDING TABLE: (繞線結構)

Winding No. (組別)	PIN (腳位)	Wire & Wire & Copper (線徑 x 股數 x 層數)	Turns (圈數)	Winding Type (繞線方式)	Tape Layer (膠帶層次)
<i>Bobbin</i>					
N1	2 → 5	0.2x 2P x 7L	138Ts	密繞	2L
<i>Core – EFD-15</i>				450uH	

Note1: Cut pin1, pin3, pin4, pin6, pin7, pin8.



# Power Component Voltage Stress


**Test condition: 264Vac/50Hz input , 78V/230mA output**

Stead state			
Location	Max rating (V)	Measure	De-rating
U1 (Vds)	500	412	82.4%
D7	600	416	69.3%

Transient State			
Location	Max rating (V)	Measure	De-rating
U1 (Vds)	500	464	92.8%
D7	600	412	68.7%


# Start up waveform

Vac\_in = 90V

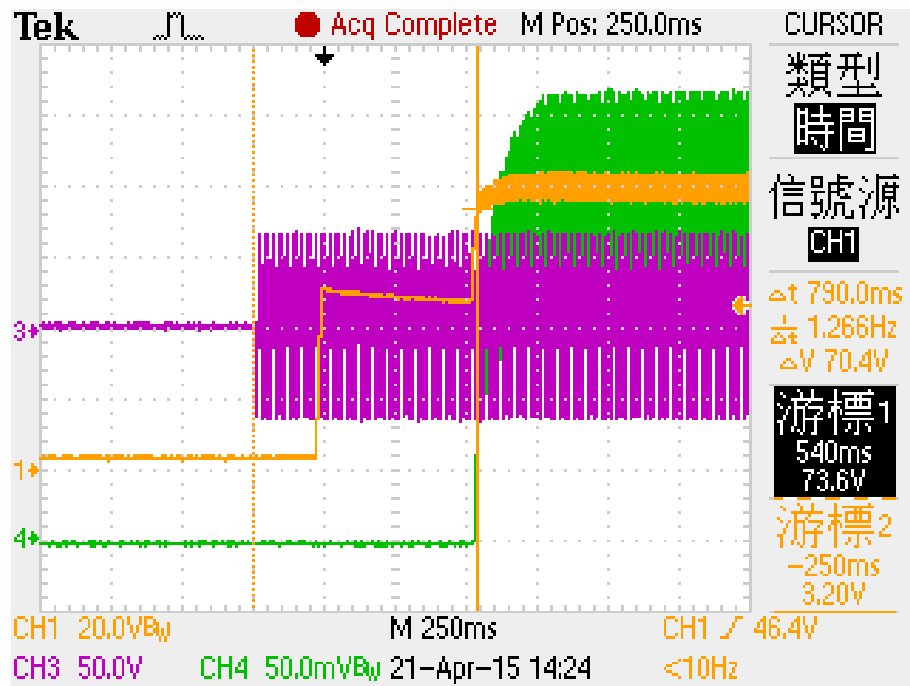


**T\_start up = 790ms**

Vac\_in = 264V

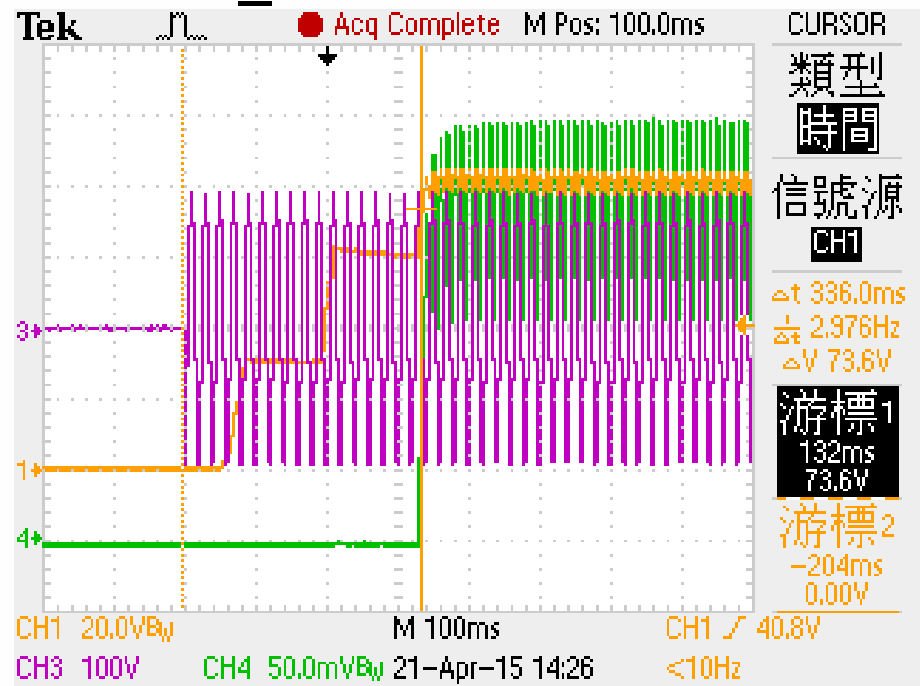

**T\_start up = 336ms**


# Harmonic(IEC61000-3-2)

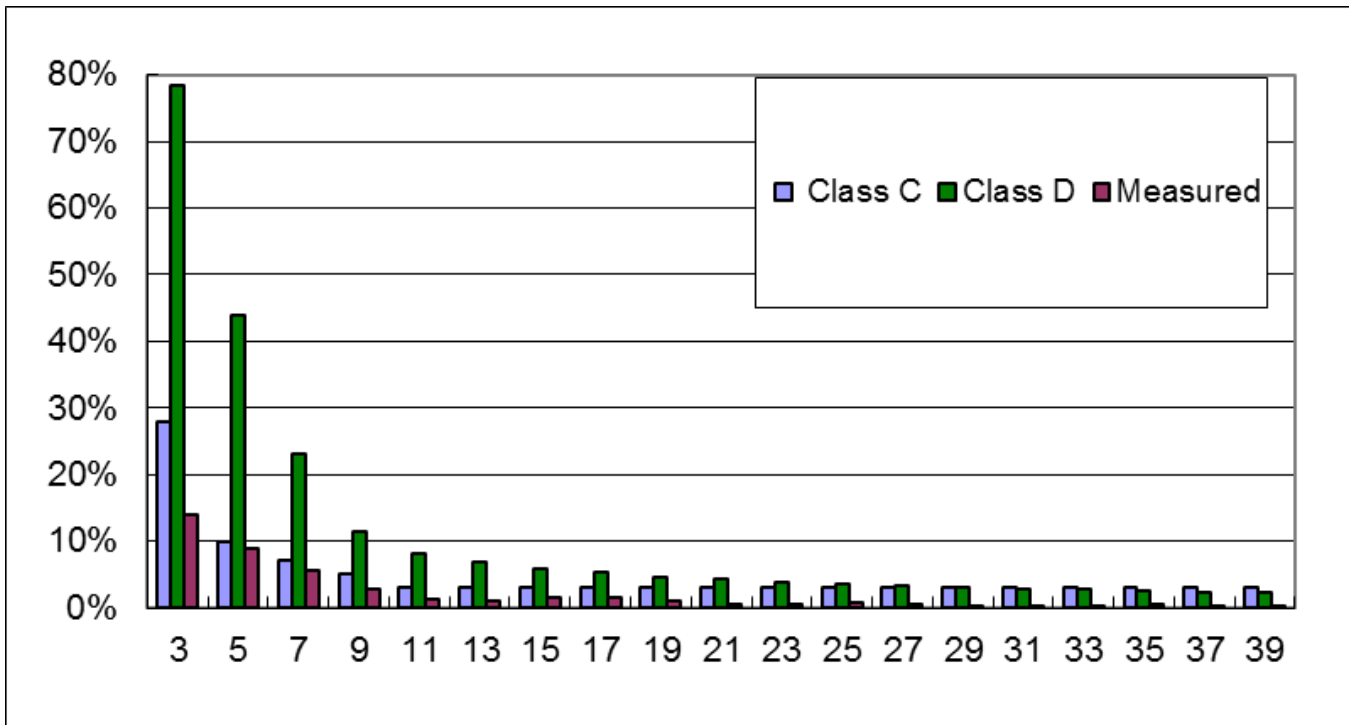

**230Vac input**  
**Class C : Pass**  
**Class D : Pass**

# EMI-Conduction(1)


110Vac/60Hz-L → Pass  
(9kHz~150kHz)

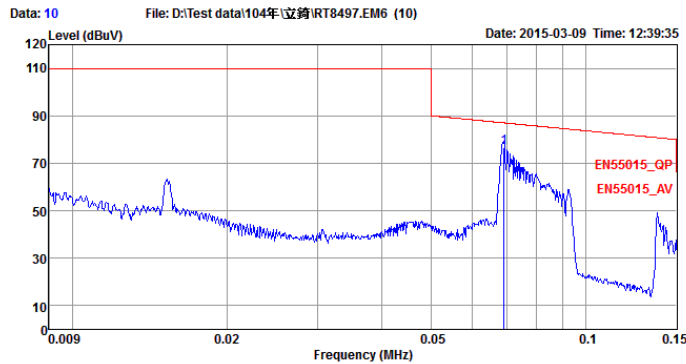

Condition: EN55015\_QP LISN-03-09-2015 LINE  
 Engineer : Parody  
 EUT : RT8497  
 Power : 110V  
 Mode :  
 Mome1 :  
 Mome2 :  
 Mome3 :  
 Mome4 :

	Freq	Level	Over	Limit	Read	LISM	Cable	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1 pp	0.07	76.50	-10.54	87.04	66.36	9.95	0.19	LINE	QP

110Vac/60Hz-L → Pass  
(150kHz~30MHz)

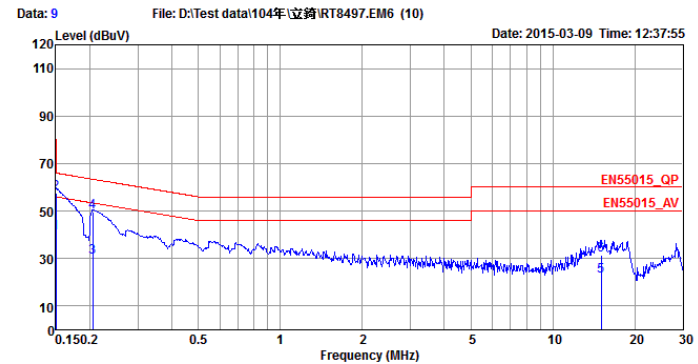



Condition: EN55015\_QP LISN-03-09-2015 LINE  
 Engineer : Parody  
 EUT : RT8497  
 Power : 110V  
 Mode :  
 Mome1 :  
 Mome2 :  
 Mome3 :  
 Mome4 :

	Freq	Level	Over	Limit	Read	LISM	Cable	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1 av	0.15	40.80	-15.20	56.00	30.67	9.93	0.20	LINE	Average
2 pp	0.15	57.75	-8.25	66.00	47.62	9.93	0.20	LINE	QP
3	0.21	30.75	-22.65	53.40	20.57	9.93	0.25	LINE	Average
4	0.21	49.46	-13.94	63.40	39.28	9.93	0.25	LINE	QP
5	15.07	22.54	-27.46	50.00	11.78	10.33	0.43	LINE	Average
6	15.07	31.24	-28.76	60.00	20.48	10.33	0.43	LINE	QP

# EMI-Conduction(2)

110Vac/60Hz-N → Pass  
(9kHz~150kHz)

110Vac/60Hz-N → Pass  
(150kHz~30MHz)

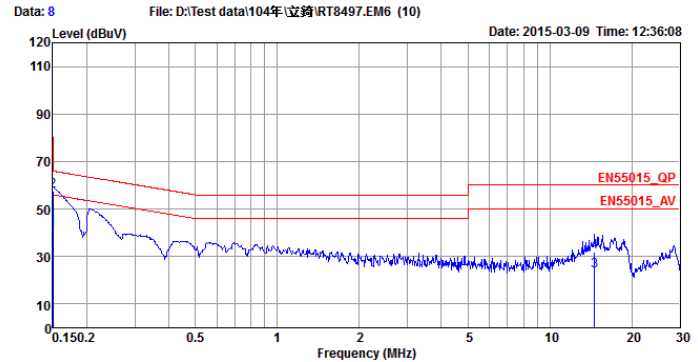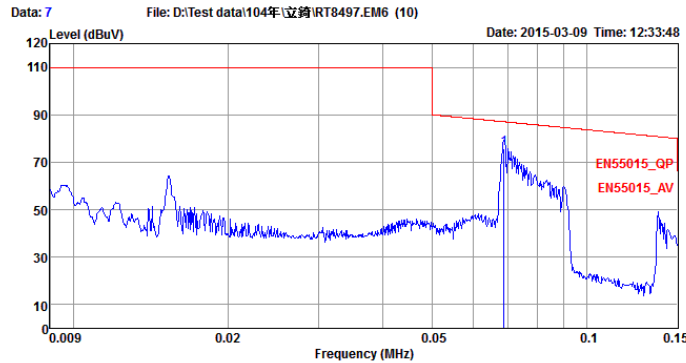

Condition: EN55015\_QP LISN-03-09-2015 NEUTRAL  
 Engineer : Parody  
 EUT : RT8497  
 Power : 110V  
 Mode :  
 Mome1 :  
 Mome2 :  
 Mome3 :  
 Mome4 :

Condition: EN55015\_QP LISN-03-09-2015 NEUTRAL  
 Engineer : Parody  
 EUT : RT8497  
 Power : 110V  
 Mode :  
 Mome1 :  
 Mome2 :  
 Mome3 :  
 Mome4 :



	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1 pp	0.07	75.75	-11.34	87.09	65.76	9.80	0.19	NEUTRAL	QP

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1 av	0.15	41.04	-14.96	56.00	31.06	9.78	0.20	NEUTRAL	Average
2 pp	0.15	57.64	-8.36	66.00	47.66	9.78	0.20	NEUTRAL	QP
3	14.59	23.78	-26.22	50.00	13.25	10.10	0.43	NEUTRAL	Average
4	14.59	32.07	-27.93	60.00	21.54	10.10	0.43	NEUTRAL	QP

# EMI-Conduction(3)

230Vac/60Hz-L → Pass  
(9kHz~150kHz)

230Vac/60Hz-L → Pass  
(150kHz~30MHz)

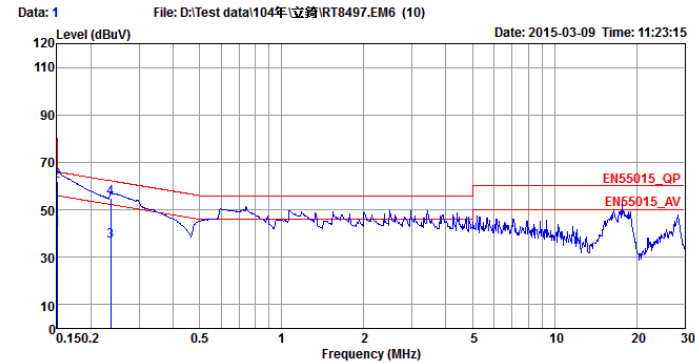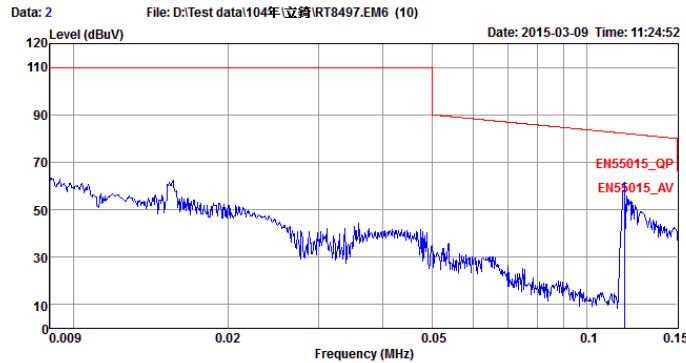

Condition: EN55015\_QP LISN-03-09-2015 LINE  
 Engineer : Parody  
 EUT : RT8497  
 Power : 220V  
 Mode :  
 Mome1 :  
 Mome2 :  
 Mome3 :  
 Mome4 :

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	pp	0.12	56.26	-25.92	82.18	46.13	9.93	0.20	LINE QP



Condition: EN55015\_QP LISN-03-09-2015 LINE  
 Engineer : Parody  
 EUT : RT8497  
 Power : 220V  
 Mode :  
 Mome1 :  
 Mome2 :  
 Mome3 :  
 Mome4 :

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	av	0.15	41.52	-14.48	56.00	31.39	9.93	0.20	LINE Average
2	pp	0.15	61.91	-4.09	66.00	51.78	9.93	0.20	LINE QP
3		0.24	36.59	-15.63	52.22	26.40	9.93	0.26	LINE Average
4		0.24	54.74	-7.48	62.22	44.55	9.93	0.26	LINE QP

# EMI-Conduction(4)

230Vac/60Hz-N → Pass  
(9kHz~150kHz)

230Vac/60Hz-N → Pass  
(150kHz~30MHz)

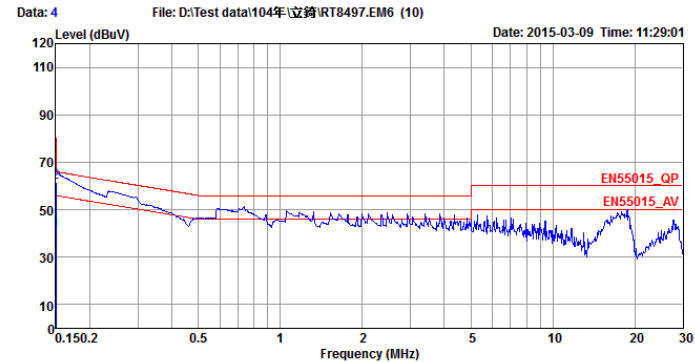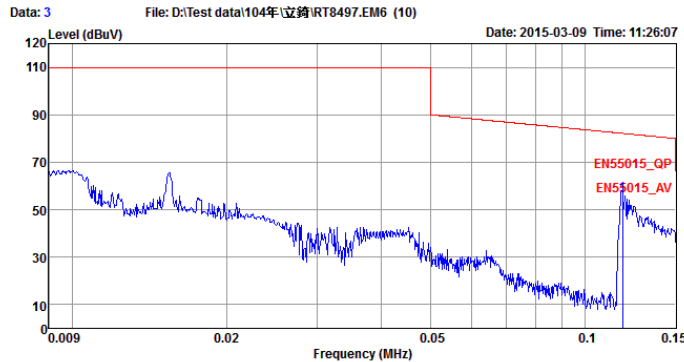

Condition: EN55015\_QP LISN-03-09-2015 NEUTRAL  
 Engineer : Parody  
 EUT : RT8497  
 Power : 220V  
 Mode :  
 Mome1 :  
 Mome2 :  
 Mome3 :  
 Mome4 :

Condition: EN55015\_QP LISN-03-09-2015 NEUTRAL  
 Engineer : Parody  
 EUT : RT8497  
 Power : 220V  
 Mode :  
 Mome1 :  
 Mome2 :  
 Mome3 :  
 Mome4 :

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1 pp	0.12	56.25	-25.93	82.18	46.27	9.78	0.20	NEUTRAL	QP


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1 av	0.15	41.04	-14.96	56.00	31.06	9.78	0.20	NEUTRAL	Average
2 pp	0.15	61.54	-4.46	66.00	51.56	9.78	0.20	NEUTRAL	QP

# EMI-Radiation(1)

## 110Vac/60Hz-V → Pass



No. 8 Lane 724, Bo Ai Street, Zhubei City,  
Hsin Chu Hsien 302, Taiwan, R.O.C.  
TEL:03-656-9065  
FAX:03-656-9085

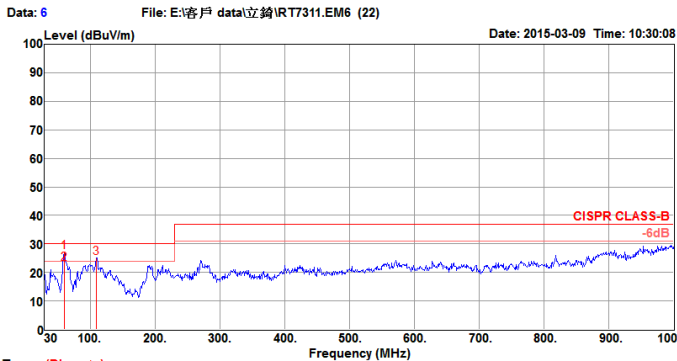


Trace: (Discrete)  
Condition: CISPR CLASS-B 10m BILOG ANT 20141111 VERTICAL  
: RBW:100.000KHz VBW:300.000KHz SWT:0.500sec  
Engineer : Hank  
Eut : RT8497 T8  
Mode : Normal  
Power : AC 110V/60Hz  
Memo 5-1 : 80V/230mA  
Memo 5-2 :

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	60.07	27.26	30.00	-2.74	51.99	0.67	6.90	32.30	100	24 Peak	VERTICAL
2	60.07	22.97	30.00	-7.03	47.70	0.67	6.90	32.30	100	24 QP	VERTICAL
3	109.54	25.10	30.00	-4.90	47.44	0.91	12.30	32.26	100	186 Peak	VERTICAL

## 110Vac/60Hz-H → Pass



No. 8 Lane 724, Bo Ai Street, Zhubei City,  
Hsin Chu Hsien 302, Taiwan, R.O.C.  
TEL:03-656-9065  
FAX:03-656-9085

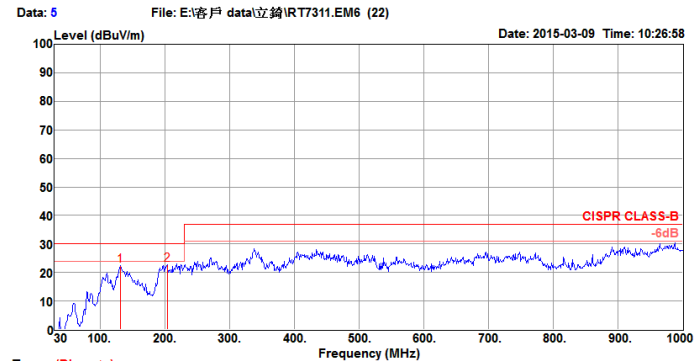

Trace: (Discrete)  
Condition: CISPR CLASS-B 10m BILOG ANT 20141111 HORIZONTAL  
: RBW:100.000KHz VBW:300.000KHz SWT:0.500sec  
Engineer : Hank  
Eut : RT8497 T8  
Mode : Normal  
Power : AC 110V/60Hz  
Memo 5-1 : 80V/230mA  
Memo 5-2 :

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	131.85	22.41	30.00	-7.59	50.77	1.00	12.58	32.21	200	175 Peak	HORIZONTAL
2	203.63	22.73	30.00	-7.27	49.99	1.24	10.55	32.05	150	195 Peak	HORIZONTAL



# EMI-Radiation(2)

## 230Vac/50Hz-V → Pass



## 230Vac/50Hz-H → Pass



No. 8 Lane 724, Bo Ai Street, Zhubei City,  
Hsin Chu Hsien 302, Taiwan, R.O.C.  
TEL:03-656-9065  
FAX:03-656-9085



No. 8 Lane 724, Bo Ai Street, Zhubei City,  
Hsin Chu Hsien 302, Taiwan, R.O.C.  
TEL:03-656-9065  
FAX:03-656-9085

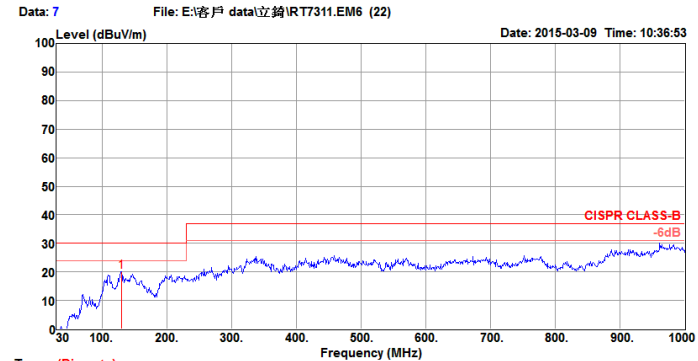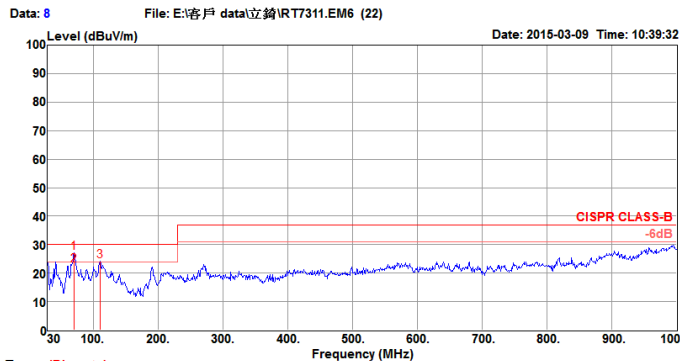

Trace: (Discrete)  
Condition: CISPR CLASS-B 10m BILOG ANT 20141111 VERTICAL  
: RBW:100.000KHz VBW:300.000KHz SWT:0.500sec  
Engineer : Hank  
Eut : RT8497 T8  
Mode : Normal  
Power : AC 220V/60Hz  
Memo 5-1 : 80V/230mA  
Memo 5-2 :

Trace: (Discrete)  
Condition: CISPR CLASS-B 10m BILOG ANT 20141111 HORIZONTAL  
: RBW:100.000KHz VBW:300.000KHz SWT:0.500sec  
Engineer : Hank  
Eut : RT8497 T8  
Mode : Normal  
Power : AC 220V/60Hz  
Memo 5-1 : 80V/230mA  
Memo 5-2 :

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	70.74	27.05	30.00	-2.95	55.23	0.73	6.87	32.31	200	133	Peak	VERTICAL
2	70.74	22.81	30.00	-7.19	50.99	0.73	6.87	32.31	200	133	QP	VERTICAL
3	110.51	24.07	30.00	-5.93	46.32	0.91	12.35	32.26	100	183	Peak	VERTICAL

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	129.91	20.21	30.00	-9.79	47.74	0.99	12.70	32.22	200	184	Peak	HORIZONTAL

**RICHTEK**  
your power partner.

thank you.