



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



2.6mm×1.6mm SMD Light Touch Switches

Type: **EVPBB**




■ Features

- External dimensions : 2.6mm×1.6mm, Height 0.53mm, 0.55mm
- High operability
Equipped with an actuator (push plate)
- IP67 characteristic

■ Recommended Applications

- Operation switches for portable electronic equipment
(Mobile phone, Portable audio)

■ Explanation of Part Numbers

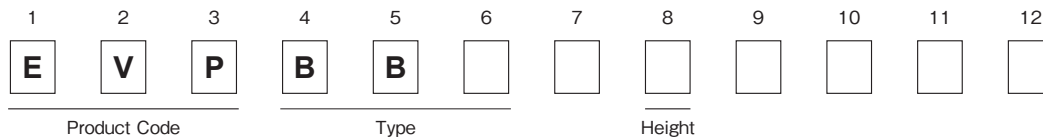

■ specification

Type		Snap action / Push-on type SPST
Electrical	Rating	10μA 2V DC to 20mA 15V DC (Resistive load)
	Contact Resistance	500mΩ max.
	Insulation Resistance	50MΩ min. (at 100V DC)
	Dielectric Withstanding Voltage	250V AC for 1 minute
	Bouncing	10ms max. (ON, OFF)
Mechanical	Operating Force	1.6N, 2.4N
	Travel	0.11mm
Endurance	Operating Life	500,000cycles min.
IP67 (*1)	IP6x (Dust resistance)	Dust : Talc (Type4) 8h
	IPx7 (Water resistance)	Immersion depth : 1m 30min.
Operating Temperature		-40°C~ +85°C
Storage Temperature		-40°C~ +85°C (Bulk) -20°C~ +60°C (Taping)
Minimum Quantity/Packing Unit		10,000pcs. Embossed Taping (Reel Pack)
Quantity/Carton		50,000pcs.

Note: Non washable

(*1) IP67 : Switch shall not be operated during test.

Water or dust ingress shall be limited enough to prevent deleterious effect to the switch function.

However, IP67 shall be guaranteed under single product state,

then there is a possibility that IP67 performance become impaired depending on your mounting condition or usage.










So, please ask us in advance, if the switch is applied to important usage for water and dust resistant.

■ Dimensions in mm (not to scale)

EVPBB

(Embossed Taping)

General dimension tolerance : ± 0.05
 () dimensions are reference dimensions.

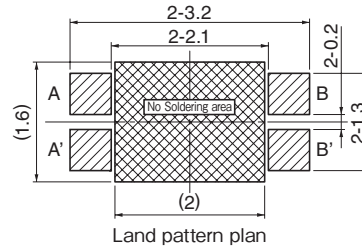

Soldering thickness $t=0.08\pm0.01$


*Soldering failure may occur depending on applied solder amount, so, please consider to use our recommended stencil and land pattern desing.

▨ : Recommended land pattern area
 ▩ : No soldering area

- Any land pattern or via holes shall not be provided at ▩ area.
- If it's necessary to design land pattern or via holes at ▩ area, please apply resist to them to protect their metal part completely.
- If their metal parts are not protected completely, short circuit failure may occur,
- Besides, there should be convexoconcave by designing additional pattern, it may cause swith tilt, influence on solder-ability or flux intrusion after reflow soldering.
- Therefore, please study any influence of addition land pattern or via holes at ▩ area in advance.

Part Numbers	Operating Force	H=Height	Operating Life
EVPBB2A1B000	1.6 N	0.53mm	500,000cycles
EVPBB4A1B000	2.4 N	0.55mm	500,000cycles


■ Recommended Reflow Soldering Conditions

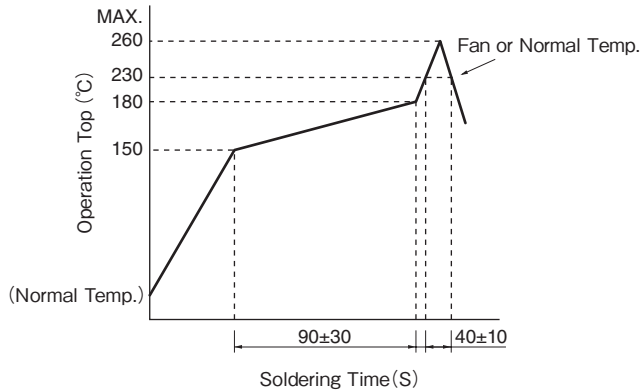

* Reflow temperature may vary by location even in the same reflow condition. Please check the reflow temperature at terminals and at the top of a switch to make sure the both temperatures are within the specification. If even one of them is out of the specifications, please adjust.

● Embossed Carrier Taping

Tape width=12.0 mm

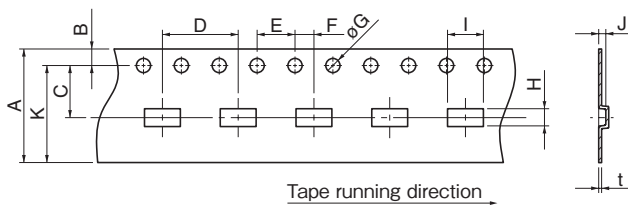


- Taping condition : Lack of products in the middle of taping should be one MAX, but total quantity specified in the specifications should be secured.
- Peeling off strength of top tape : It should be within 0.2N to 1.0N at 165 degree in peeling off angle.
- Joint of carrier tape : One joint per one reel may exist.

Unit : mm

Part No.	Height	A	B	C	D	E	F	G	H	I	J	K	t
EVPBB	0.53 0.55	12.0±0.3	1.75±0.10	5.5±0.1	8.0±0.1	4.0±0.1	2.0±0.1	1.5±0.3	19.5±0.2	3.3±0.2	0.7±0.2	(10.25)	0.3 ^{+0.15} _{-0.10}

● Standard Reel Dimensions in mm (not to scale)

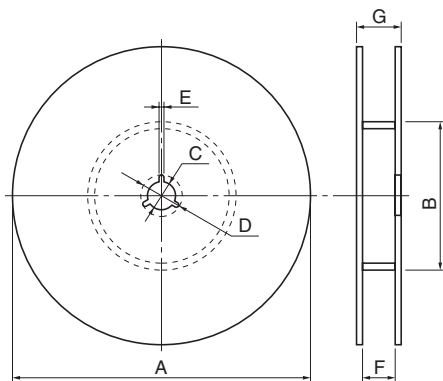

Item	A	B	C	D	E
Rate (mm)	ø380.0±2.0	ø80.0±1.0	ø13.0±0.5	ø21.0±1.0	2.0±0.5

Item	F	G
Rate (mm)	13.5±1.0	17.5±1.0