



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



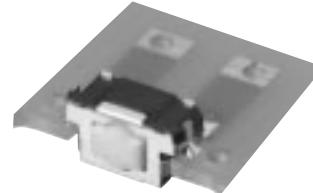
Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

6.2 mm×2.5 mm Side-operational Edge Mount Light Touch Switches Type: **EVQP4**




■ Features

- External dimensions : 6.2 mm×2.55 mm (Excluding the push plate), Height 3.5 mm (EVQP4 Type : Printed circuit board being as low as 1.35 mm)
- Side-operational middle stroke type (0.7 mm) with a high operating force (5.0 N)
- Improved soldering strength in the operating direction when mounted on PC board edge

■ Recommended Applications

- Operation switches for portable electronic equipment (Mobile phones, Digital still cameras, Camcorders, Portable audio players, etc.)
- Keyless entry (car electronics)
- Car audio equipment

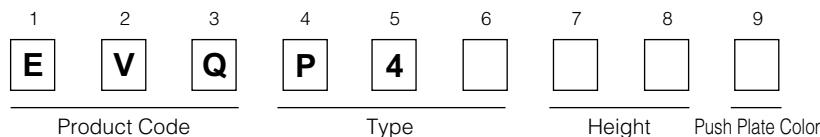■ Explanation of Part Numbers












■ Specifications

Travel Type		Middle Push Travel		Short Push Travel		
Type		Snap action / Push-on type SPST				
Electrical	Rating	10 μ A 2 Vdc to 20 mA 15 Vdc (Resistive load)				
	Contact Resistance	100 m Ω max.				
	Insulation Resistance	100 M Ω min. (at 100 Vdc)				
	Dielectric Withstanding Voltage	250 Vac (1 minute)				
	Bouncing	10 ms max. (ON, OFF)				
Mechanical	Operating Force	2.5 N, 3.5 N, 5.0 N		1.0 N, 1.6 N, 2.4 N, 3.5 N		
	Travel	0.70 mm \pm 0.2 mm		0.25 mm $^{+0.05}_{-0.15}$ mm		
	Push Strength	50 N (1 minute)				
Endurance	Operating Life	2.5 N:1000000 cycles min.	1.0 N, 1.6 N: 1000000 cycles min.			
		3.5 N: 500000 cycles min.	2.4 N: 500000 cycles min.			
Operating Temperature		-40 °C to +85 °C				
Storage Temperature		-40 °C to +85 °C (Bulk) -20 °C to +60 °C (Taping)				
Minimum Quantity/Packing Unit		2500 pcs. Embossed Taping (Reel Pack)				
Quantity/Carton		12500 pcs.				

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.

00 Oct. 2012

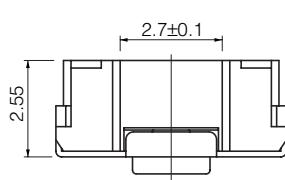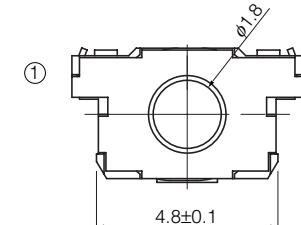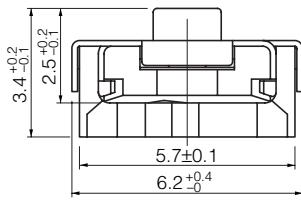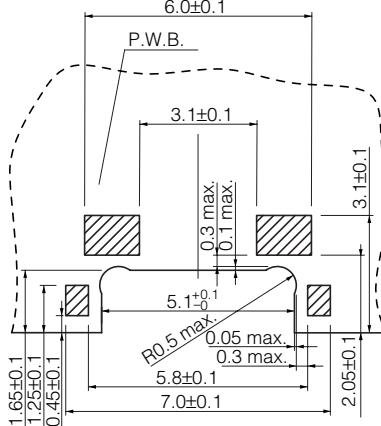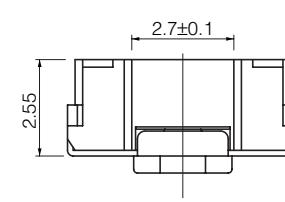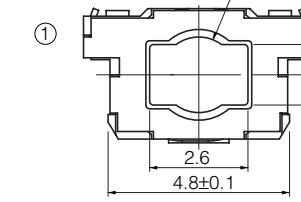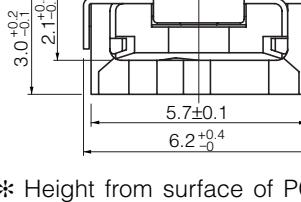
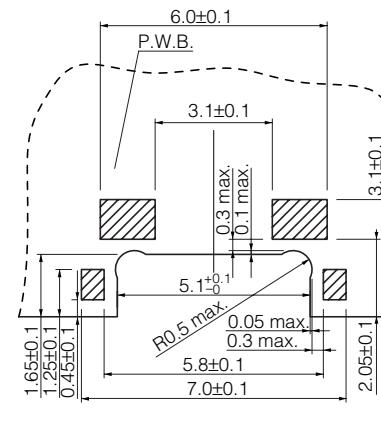
■ Dimensions in mm (not to scale)

No. 1	EVQP4 Middle push travel	   	 Circuit diagram	
			 PWB land pattern for reference	
			<small>* Height from surface of PCB : 1.35 mm</small>	
Part Numbers	Operating Force	Height	Push Plate Color	Operating Life
EVQP4HB3B	2.5 N	3.5 mm	Blue	1000000 cycles
EVQP4KB3Q	3.5 N	3.5 mm	Grey	500000 cycles
EVQP4MB3K	5.0 N	3.5 mm	Black	200000 cycles
No. 2	EVQP4 Short push travel	   	 Circuit diagram	
			 PWB land pattern for reference	
			<small>* Height from surface of PCB : 1.35 mm</small>	
Part Numbers	Operating Force	Height	Push Plate Color	Operating Life
EVQP40B3M	1.0 N	3.5 mm	Natural	1000000 cycles
EVQP42B3M	1.6 N	3.5 mm	Natural	1000000 cycles
EVQP44B3M	2.4 N	3.5 mm	Natural	500000 cycles
EVQP46B3M	3.5 N	3.5 mm	Natural	200000 cycles

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


■ Recommended Reflow Soldering Conditions

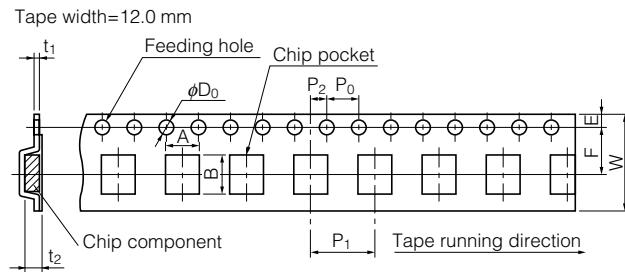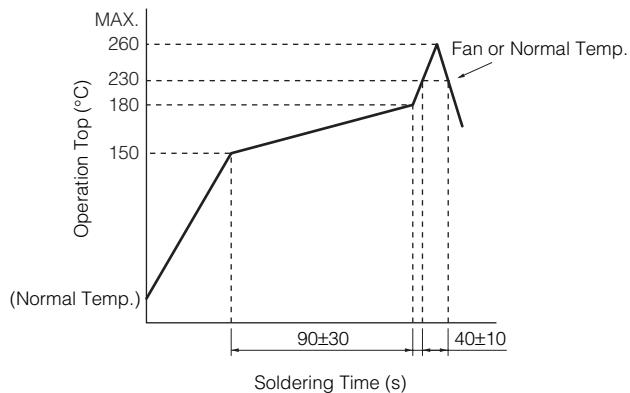● Embossed Carrier Taping



Unit: mm												
Part No.	Height	A	B	W	F	E	P ₁	P ₂	P ₀	Do Dia.	t ₁	t ₂
EVQP4	3.5	6.5±0.2	3.9±0.2	12.0±0.3	5.5±0.1	1.75±0.10	8.0±0.1	2.0±0.1	4.0±0.1	1.5 ^{+0.1} ₋₀	0.4±0.1	3.75±0.20

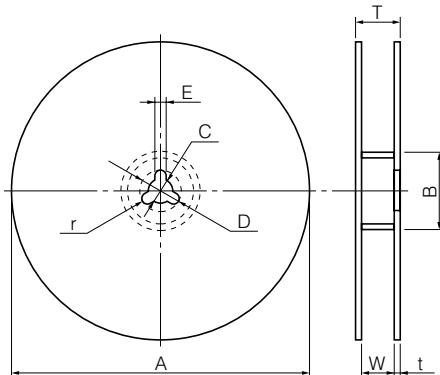● Standard Reel Dimensions in mm (not to scale)



Item	A	B	C	D	E
Rate (mm)	φ370.0±2.0	φ50.0 min.	φ13.0±0.5	φ21.0±1.0	2.0±0.5
Item	W	T	t	r	
Rate (mm)	14.0±1.5	—	1.0 to 3.0	1.0±0.5	