



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# F11




- Higher Capacitance.
- Low ESR, Low ESL, High ripple current.
- Resin-molded Chip.
- Designed for surface mounting on high density PC board.
- Load life of 5000 hours at +105°C.
- Compliant to the RoHS directive (2002/95/EC).

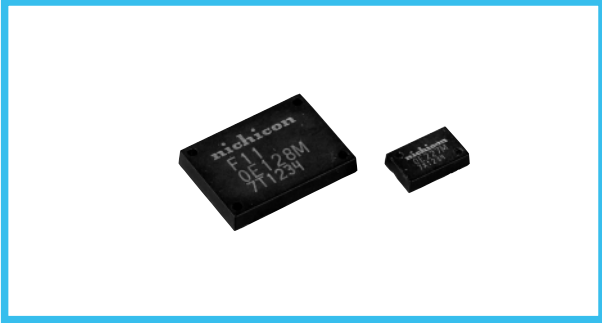

### ■ Type numbering system (Example : 2.5V 220μF)

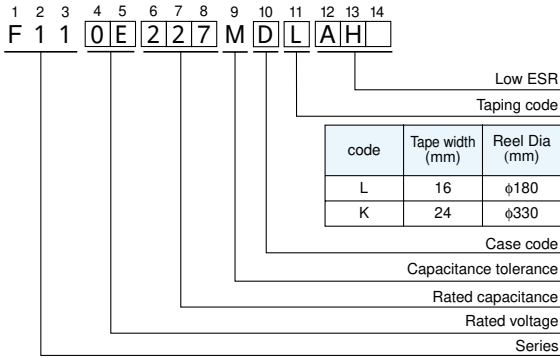


### ■ Dimensions



Case Code	L <sub>1</sub>	L <sub>2</sub>	W <sub>1</sub>	W <sub>2</sub>	H	S <sub>1</sub>	S <sub>2</sub>	S <sub>3</sub>	P
D	8.5 ± 0.2	7.3 ± 0.2	5.3 ± 0.2	1.7 ± 0.2	2.0MAX.	0.9 ± 0.2	0.6 ± 0.2	0.5 ± 0.2	3.3 ± 0.2
F	16.7 ± 0.2	15.6 ± 0.2	12.1 ± 0.2	3.6 ± 0.2	2.5MAX.	1.5 ± 0.1	1.3 ± 0.1	1.5 ± 0.2	7.0 ± 0.2

(mm)

### ■ Marking

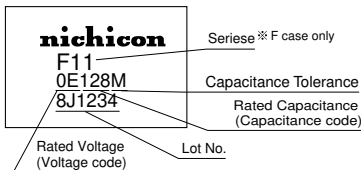

### ■ Specifications

Item	Performance Characteristics		
Category Temperature Range	-55 to +105°C		
Capacitance Tolerance	±20% (at 120Hz)		
Dissipation Factor	Refer to next table		
ESR	Refer to next table		
Leakage Current	After 5 minute's application of rated voltage, leakage current is not more than 0.1CV		
Damp Heat (Steady State)	At 60°C 90%RH 500hours (No voltage applied)		
	Capacitance Change	Within -20 to +30% of the initial specified value	
	Dissipation Factor	200% or less than the Initial specified value	
	ESR	200% or less than the Initial specified value	
Temperature Cycles	-55°C / +105°C 30minutes each 5cycle		
	Capacitance Change	Within ±20% of the Initial specified value	
	Dissipation Factor	200% or less than the Initial specified value	
	ESR	200% or less than the Initial specified value	
Temperature Change Characteristics		-55°C	+105°C
	Capacitance Change	Within -20 to +0%	Within -0 to +50%
	Dissipation Factor	Initial specified value or less	150% or less than the Initial specified value
	ESR	Initial specified value or less	150% or less than the Initial specified value
Resistance to Soldering Heat	Capacitor meets the following characteristics after solder reflow (Peak: 240°C for 10sec, 2cycle). Temperature should be measured at the terminals.		
	Capacitance Change	Within ±20% of the Initial specified value	
	Dissipation Factor	Initial specified value or less	
	ESR	Initial specified value or less	
Surge	After application of 115% of rating voltage at the rate of 30 seconds ON, 30 seconds OFF, for 1000 successive test cycles at 105°C, capacitors meet the characteristics requirements listed below.		
	Capacitance Change	Within ±20% of the initial specified value	
	Dissipation Factor	200% or less than the Initial specified value	
	ESR	200% or less than the Initial specified value	
Endurance	After 5000 hours' application of rated voltage at 105°C, they will meet the specified value for life characteristics listed below.		
	Capacitance Change	Within ±20% of the initial value	
	Dissipation Factor	200% or less than the Initial specified value	
	ESR	200% or less than the Initial specified value	
Marking	Printed on the package top.		

### ■ Standard ratings

Cap.(μF)	Code	V		
		2.5	4	6.3
47	476	0E	0G	0J
100	107	D	D	(D)
220	227	D	(D)	
330	337	(D)		
600	607	F		F
800	807		F	
1200	128	F		

( ) The series in parentheses are being developed.  
Please contact to your local Nichicon sales office when these series are being designed in your application.

## F11

### ■ Ratings Table



#### < Standard >

Rated Volt (V)	Rated Capacitance (μF)	Case code	Part Number	Leakage Current (μA)	Dissipation Factor (%@120Hz)	ESR (mΩ@100kHz)	Rated Ripple (Arms@100kHz)
2.5	100	D	F110E107MDL	25	5	20.0	3.5
	220	D	F110E227MDL	55	5	20.0	3.5
	600	F	F110E607MFK	150	10	5.0	6.3
	1200	F	F110E128MFK	300	10	5.0	6.3
4	47	D	F110G476MDL	19	5	20.0	3.5
	100	D	F110G107MDL	40	5	20.0	3.5
	800	F	F110G807MFK	320	10	5.0	6.3
6.3	47	D	F110J476MDL	30	5	20.0	3.5
	600	F	F110J607MFK	378	10	5.0	6.3

#### < Low ESR >

Rated Volt (V)	Rated Capacitance (μF)	Case code	Part Number	Leakage Current (μA)	Dissipation Factor (%@120Hz)	ESR (mΩ@300kHz)	Rated Ripple (Arms@300kHz)
2.5	220	D	F110E227MDLAH1	55	5	12.0	4.5
	1200	F	F110E128MFKAH3	300	10	1.5	11.5
4	100	D	F110G107MDLAH1	40	5	15.0	4.0
6.3	47	D	F110J476MDLAH1	30	5	15.0	4.0

### ■ Layout Land Pattern (Example)




(mm)

Case	a	b	b'	c	c'
D	5.5	1.4	1.2	0.5	1.9
F	14	1.8	1.8	1.2	6.6

(mm)

Case	a	b	b'	c'
D	5.5	1.0	4.3	0.6
F	14	1.8	10.2	1.2

### ■ Frequency characteristic

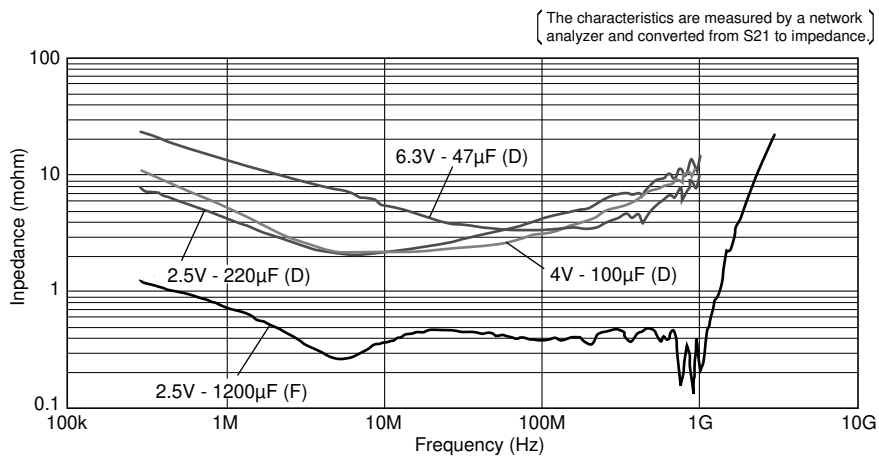

< Notice > The graph illustrates representative data. Please use this for reference only.