



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CLASS 2 BLUETOOTH® MODULE - F2M03AC2


FEATURES

- Complete Bluetooth system including antenna
- Includes complete audio codec
- Available with complete Bluetooth software stack
- Headset functionality available
- Wireless UART functionality without extra protocol
- Serial interface, 8 digital and 2 analog I/O
- Analog and digital (PCM) voice interface for up to 3 simultaneous voice channels
- Nominal 20 m range, transmit Power up to +4 dBm
- Full Bluetooth data rate over UART and USB
- 4 low power modes
- Surface mountable, physical size: 24x13 mm
- Bluetooth v1.1 compliant

APPLICATIONS

Prototyping and volume production of:

- Wireless headsets
- Audio applications
- Industrial and domestic appliances
- Stand alone sensors
- Embedded systems
- Mobile phones

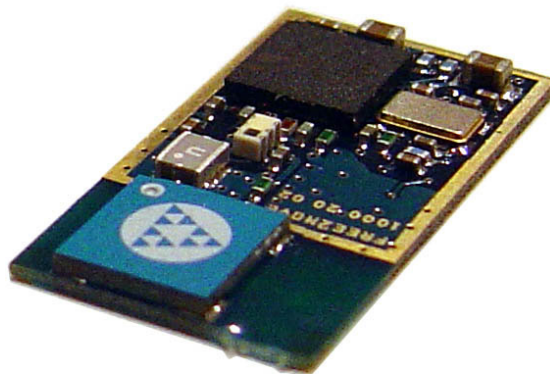

GENERAL DESCRIPTION

This module is a Class 2 surface mountable Bluetooth system. The module includes antenna and an audio codec for conversion between analog and digital voice.

It provides a fully compliant device for data and voice communications. The physical interfaces to a host (UART and USB) can support full Bluetooth data rate of 723.2kbps. An analog voice interface and a PCM synchronous bi-directional digital audio interface are available. There are also digital and analog I/O and I2C interfaces.

The module is available with a number of different firmware versions: The Wireless UART firmware implements the Serial Port Profile (SPP) with an easy to use command interface. All information sent to the serial interface is transmitted transparently via Bluetooth to the connected remote device.

Other firmware versions are: Headset, HCI, RFCOMM and the possibility to get customized standalone applications implemented on the module.

