



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





- High Coverage, Self-Wrapping Design
- UL and VW-1
- Passes Smoke Density Test ASTM E-662
- Passes Surface Flammability Test ASTM E-162
- Passes Smoke Toxicity Test SMP 800-C
- Melt Temp. 482°F



Cuts Cleanly
Hot Knife

Material
PET Polyethylene Terephthalate

Grade
F6V

Filament Diameter
.010" Monofilament Polyester
1200 Denier Multifilament


Drawing Number
TF001FWPT-WD

Nominal Size	Part #	Wall Thickness	Put-Ups			Available Colors	Overlap *A	Lbs/100'
			Bulk	A	B			
3/16"	F6V0.19TB	.027"	3,000'	500'	100'	TB	51%	0.8
3/8"	F6V0.38TB	.027"	2,000'	250'	100'	TB	41%	1.2
1/2"	F6V0.50TB	.027"	1,500'	200'	75'	TB	35%	1.6
3/4"	F6V0.75TB	.027"	1,000'	150'	50'	TB	28%	2.5
1"	F6V1.00TB	.027"	460'	100'	50'	TB	26%	3.2
1 1/4"	F6V1.25TB	.027"	330'	75'	25'	TB	25%	3.7
1 1/2"	F6V1.50TB	.027"	260'	50'	25'	TB	23%	4.8


Woven, Flame Retardant Split Tubular Harness Wrap

F6 Woven Wrap FR (F6V) is a VW-1 Rated version our industry recognized F6 Woven Wrap, with the added advantage of a flame inhibitor to provide an extra level of safety. It utilizes many of the same characteristics as our original F6 split braided sleeving including the easy wrap around design and the extra overlap to ensure complete protection of important electronic communication and power systems. The new woven construction provides superior elastic flexibility with unbeatable coverage over any harness assembly. Through a unique process, the blend of monofilament and multifilament polyester fibers are formed into a sleeving with memory that causes the sleeve to self close, and also snap back when opened. The combination of flame retardance, ease of installation, and complete coverage makes F6 Woven FR an ideal solution for many commercial and aerospace applications.

Colors Available:
Black w/White Tracer (TB)

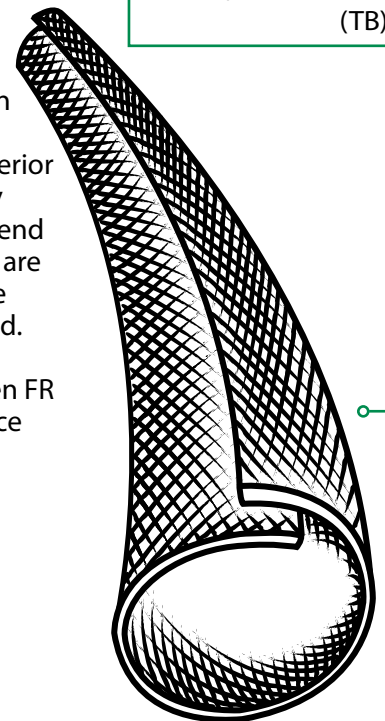

The Right Overlap For Your Harness



The engineered overlap allows ideal flexibility without exposing wires and cables.



www.techflex.com
800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871





ABRASION FLAMMABILITY

Abrasion Resistance
Medium

Rating _____ VW-1

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	2
Aliphatic Solvents _____	1
Chlorinated Solvents _____	3
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	3
Strong Oxidants _____	2
Esters/Ketones _____	2
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
482°F (250°C)

Maximum Continuous
Mil-I-23053
257°F (125°C)

Minimum Continuous
-94°F (-70°C)

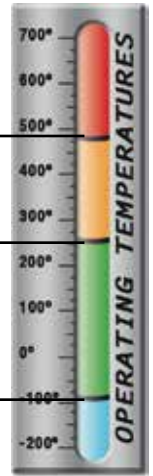

PHYSICAL PROPERTIES

Filament Diameter:	
<i>Monofilament Polyester</i> _____	.010
<i>Multifilament</i> _____	1200 Denier
Flammability Rating: _____	VW-1
<i>Self Extinguishing, Type A</i>	
Recommended Cutting _____	Hot Knife
Colors _____	1
Wall Thickness _____	.027
Hard Vacuum Data _____	
<i>ASTM E-595 at 10-5 torr</i>	
TML (%) _____	.19
CVCM (%) _____	.00
WVR (%) _____	.06
Smoke D-Max _____	275
Outgassing _____	Med
Oxygen Index _____	31

www.techflex.com