# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## PRODUCT DATASHEET FA11739\_LXP-RS2

## LXP-RS2

 ${\sim}8.5^{\circ}\,$  spot beam optimized for CREE XP-E. 14.7 mm high assembly with installation tape.

## **TECHNICAL SPECIFICATIONS:**

Dimensions	Ø 21.6 mm
Height	14.7 mm
Fastening	tape
Colour	black
Box size	
Box weight	11.9 kg
Quantity in Box	2304 pcs
ROHS compliant	yes 🛈




### **MATERIAL SPECIFICATIONS:**

**Component** LR1-RS2 LXP-LH1-TAPE-BLK LEILA-TAPE **Type** Lens Holder Tape Material PMMA PC PU tape Colour clear black black

## PRODUCT DATASHEET FA11739\_LXP-RS2



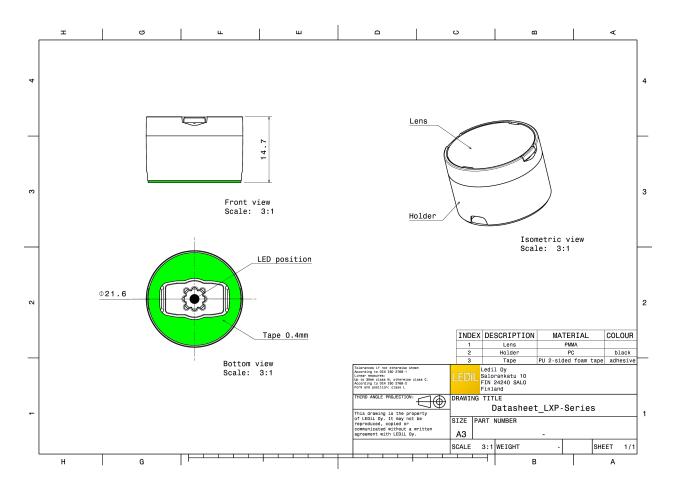





## PHOTOMETRIC DATA (MEASURED):

CREE ◆         LED       XP-E         FWHM       9.0°         Efficiency       94 %         Peak intensity       25.000 cd/lm         Required components:          CREE ◆         LED       XP-G         FWHM       10.0°         Efficiency       94 %         Peak intensity       14.100 cd/lm         Required components:          CREE ◆         LED       XP-L HI         FWHM       11.0°         Efficiency       89 %         Peak intensity       17.000 cd/lm         Required components:	
FWHM 9.0° Efficiency 94 % Peak intensity 25.000 cd/lm Required components:	
Efficiency 94 % Peak intensity 25.000 cd/lm Required components:	
Peak intensity 25.000 cd/lm Required components: CREE ↓ LED XP-G FWHM 10.0° Efficiency 94 % Peak intensity 14.100 cd/lm Required components: CREE ↓ LED XP-L HI FWHM 11.0° Efficiency 89 % Peak intensity 17.000 cd/lm	
Required components: CREE € LED XP-G FWHM 10.0° Efficiency 94 % Peak intensity 14.100 cd/lm Required components: CREE € LED XP-L HI FWHM 11.0° Efficiency 89 % Peak intensity 17.000 cd/lm	
CREE ÷         LED       XP-G         FWHM       10.0°         Efficiency       94 %         Peak intensity       14.100 cd/lm         Required components:       Image: Component State	
LED XP-G FWHM 10.0° Efficiency 94 % Peak intensity 14.100 cd/lm Required comments:	
LED XP-G FWHM 10.0° Efficiency 94 % Peak intensity 14.100 cd/lm Required computer substitutions CREE LED XP-L HI FWHM 11.0° Efficiency 89 % Peak intensity 17.000 cd/lm	
LED XP-G FWHM 10.0° Efficiency 94 % Peak intensity 14.100 cd/lm Required comments:	
LED XP-G FWHM 10.0° Efficiency 94 % Peak intensity 14.100 cd/lm Required comments:	
FWHM 10.0°   Efficiency 94 %   Peak intensity 14.100 cd/lm   Required components:     CREE    LED   XP-L HI   FWHM   FWHM   11.0°   Efficiency   89 %   Peak intensity   17.000 cd/lm	
Efficiency 94 % Peak intensity 14.100 cd/lm Required components:	
Peak intensity 14.100 cd/lm Required components:	
Required components:	
CREE \$\u22112         LED       XP-L HI         FWHM       11.0°         Efficiency       89 %         Peak intensity       17.000 cd/lm	
LED       XP-L HI         FWHM       11.0°         Efficiency       89 %         Peak intensity       17.000 cd/lm	
LED       XP-L HI         FWHM       11.0°         Efficiency       89 %         Peak intensity       17.000 cd/lm	
LED       XP-L HI         FWHM       11.0°         Efficiency       89 %         Peak intensity       17.000 cd/lm	
LED       XP-L HI         FWHM       11.0°         Efficiency       89 %         Peak intensity       17.000 cd/lm	
FWHM       11.0°         Efficiency       89 %         Peak intensity       17.000 cd/lm	
Efficiency 89 % Peak intensity 17.000 cd/lm	1-2
Peak intensity 17.000 cd/lm	
Required components:	
	X
***	





## PHOTOMETRIC DATA (SIMULATED):

SEOUL SEMICONDUCTOR	
LED	Z5
FWHM	8.0°
Efficiency	%
Peak intensity	cd/lm
Required compo	nents:



## PRODUCT DATASHEET FA11739\_LXP-RS2

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

#### Local sales and technical support www.ledil.com/ where\_to\_buy

Shipping locations Salo, Finland Hong Kong, China

Distribution Partners www.ledil.com/ where to buy