



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




DETAILS

Product Number	FC13975_ANGELINA-RZ-M
Family	ANGELINA
Type	RefPack
Color	metal
Diameter	82 mm
Height	31 mm
Style	round
Optic Material	PC
Holder Material	
Fastening	screw, socket
Status	production ready
ROHS Compliant	Yes
Date Updated	13/03/2015



OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
LUXEON K12	37 deg	Medium	89 %	1.300	TE: 2213134-2 + OPTIC CLIP Z50 TYPE1 2213194-1
LUXEON K16	43 deg	Medium	89 %	1.100	TE: 2213134-2 + OPTIC CLIP Z50 TYPE1 2213194-1
COB J-Type	36 deg	Medium	87 %	1.200	IDEAL: 50-2103NC + 50-2100AN
PrevaLED Core Z4 LES19	40 deg	Medium	88 %	1.100	TE: OPTIC CLIP Z50 TYPE1 2213194-1
Fortimo SLM G5 LES 15 Standard	41 deg	Medium	86 %	1.000	TE: OPTIC CLIP Z50 TYPE1 2213194-1
AC Zhaga COB	47 deg	Medium	88 %	0.940	Optosource: SEHSMJD-A
Mega Zenigata (GW6DME)	40 deg	Medium	88 %	1.100	TE: 2213130-2 + OPTIC CLIP Z50 TYPE1 2213194-1

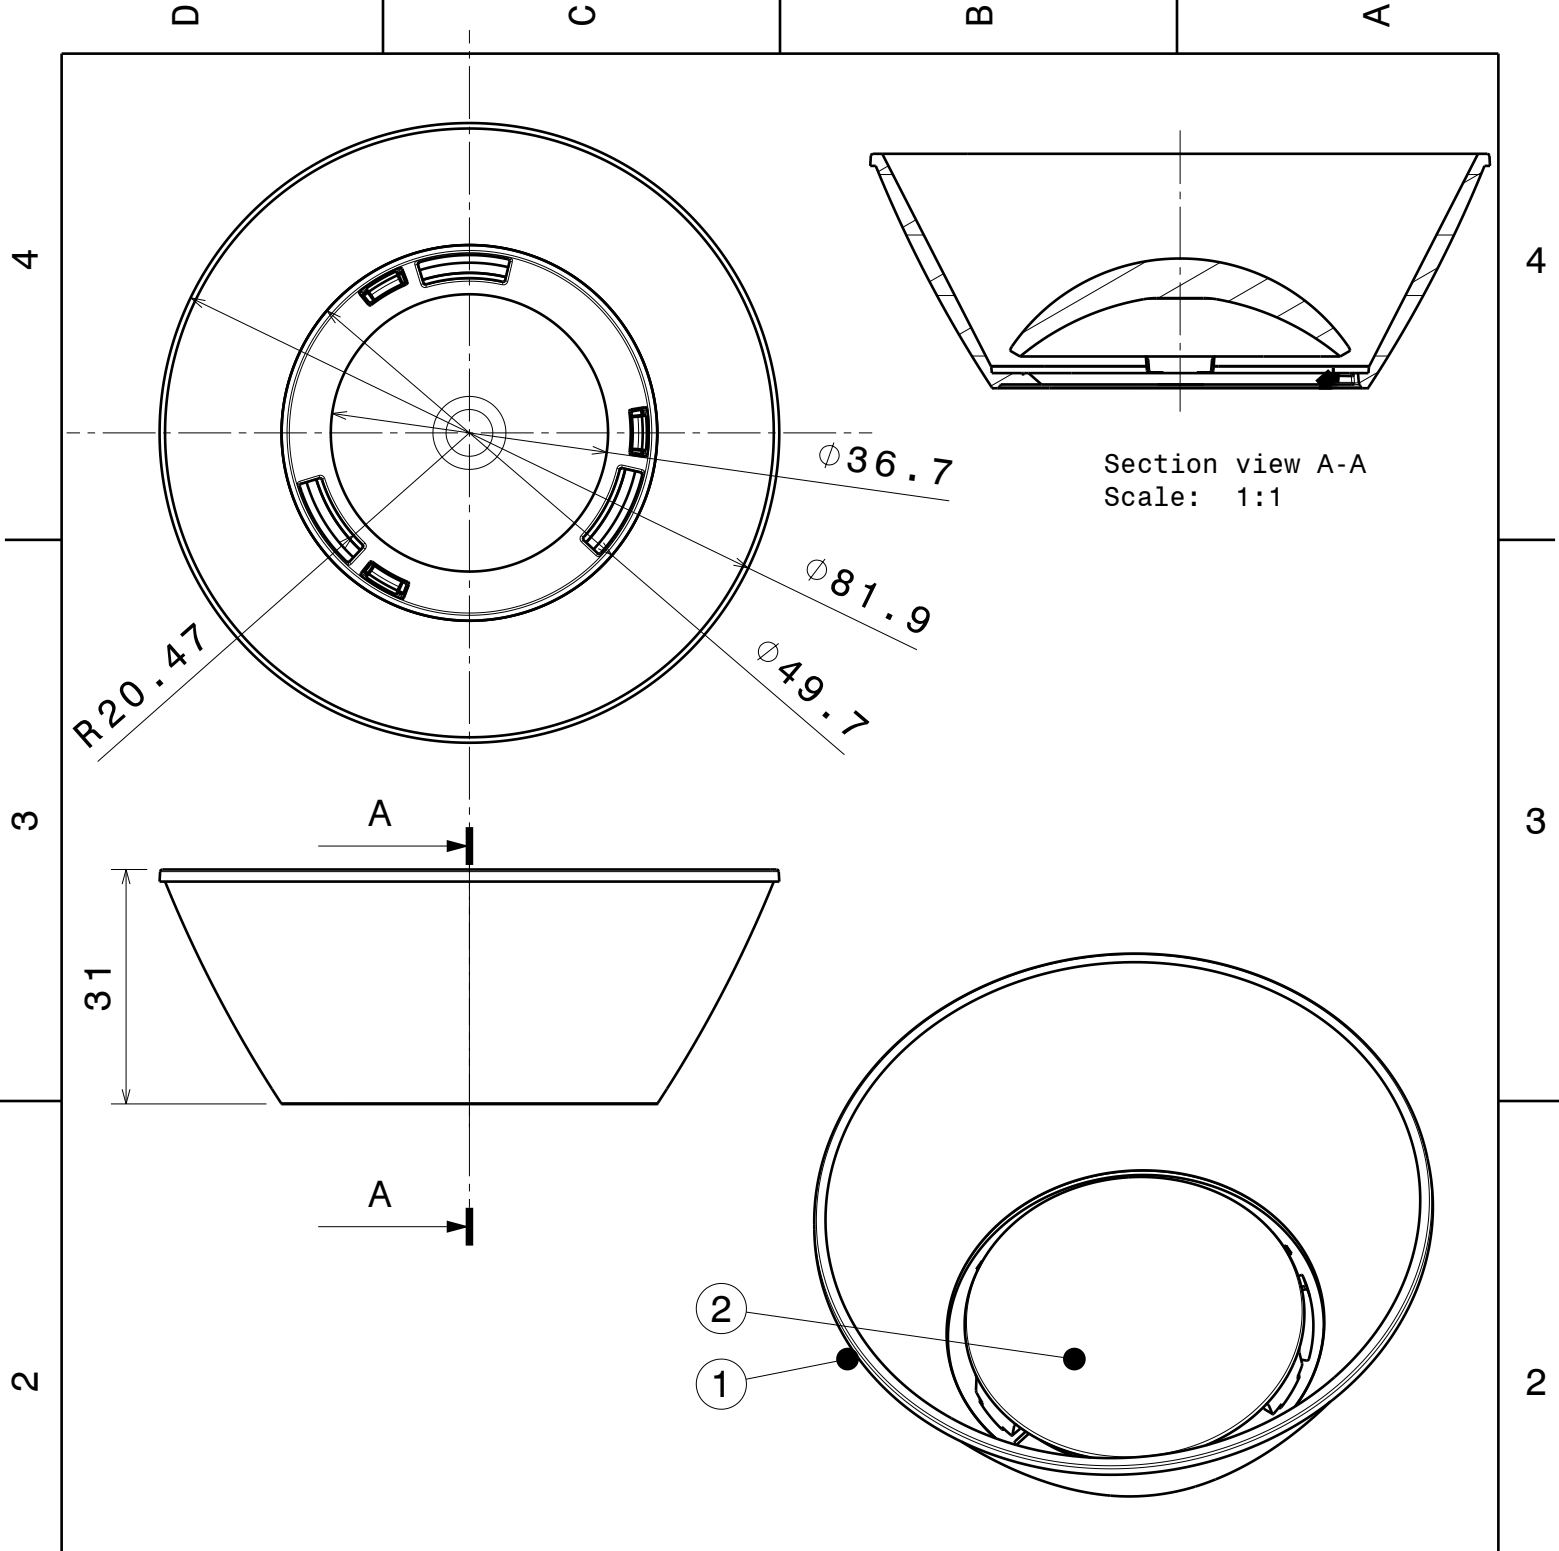

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1		ANGELINA reflector	PC	metal
2		ANGE-RZ-lens	PC	

Tolerances if not otherwise shown
 According to DIN ISO 2768-1
 Linear measures:
 Up to 30mm class M, otherwise class C.
 According to DIN ISO 2768-2
 Form and position: class L

LEDiL Ledil Oy
 Salorankatu 10
 FIN 24240 SALO
 Finland

THIRD ANGLE PROJECTION:


DRAWING TITLE
Angelina-RZ Assy

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy."


SIZE PART NUMBER
A4

SCALE 1:1 WEIGHT 16,4 g SHEET 1/1

Luminaire: LEdil Oy FC13975_ANGELINA-RZ-M_(Luxeon_K12) Efficiency=89%
Lamps: 1 x Luxeon K12 (LXK8-PW40-0012) 930lm @ 250mA CCT=4000K P=8.2W I=250mA

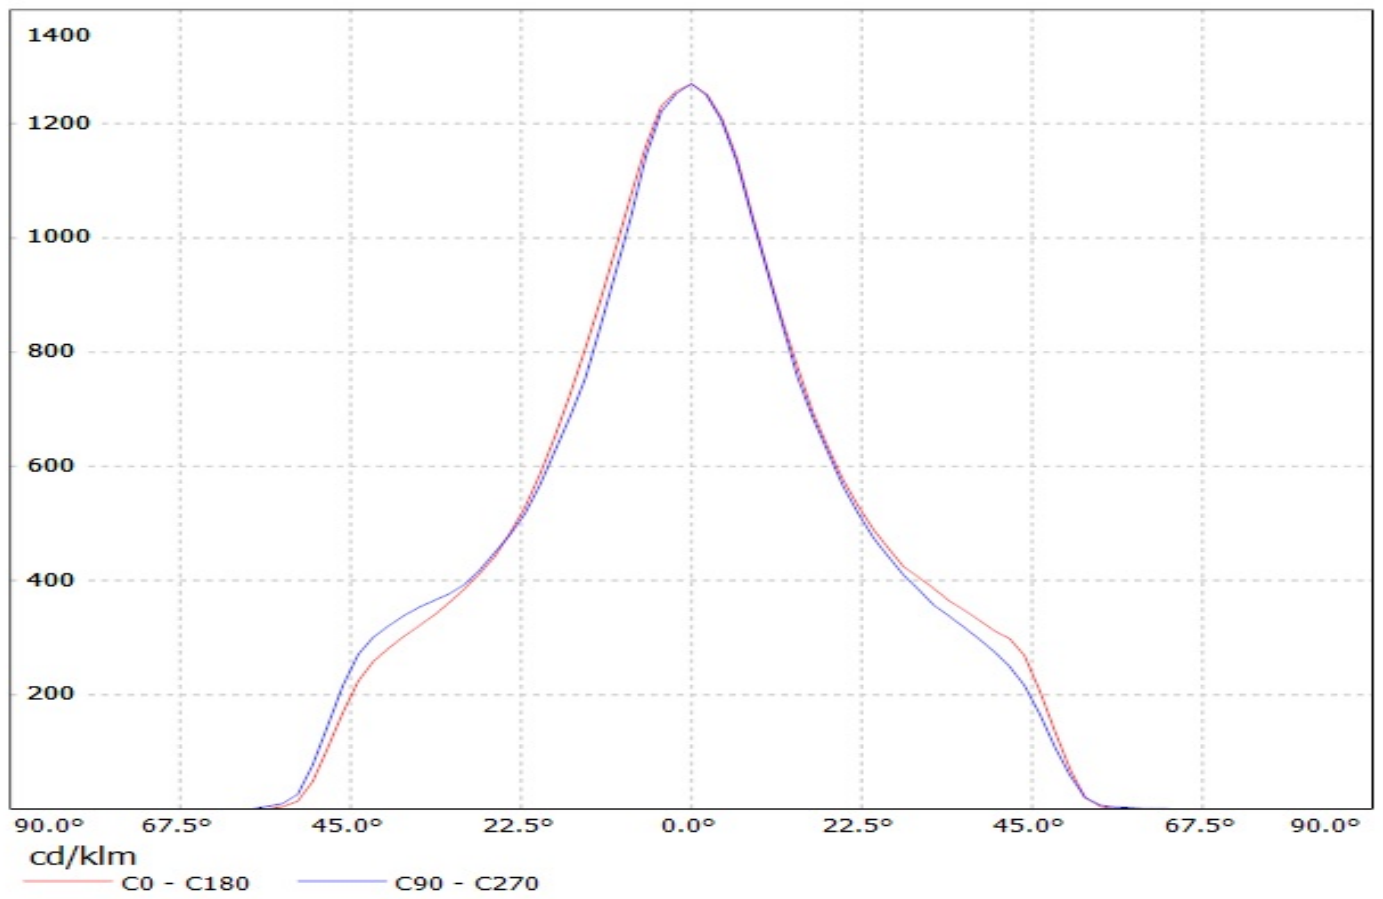


Luminaire: LEDil Oy FC13975_ANGELINA-RZ-M_(Luxeon_K16) Efficiency=89%
Lamps: 1 x Luxeon K16 (LXK8-PW40-0016) 1200lm @ 250mA CCT=4000K P=10.9W I=250mA

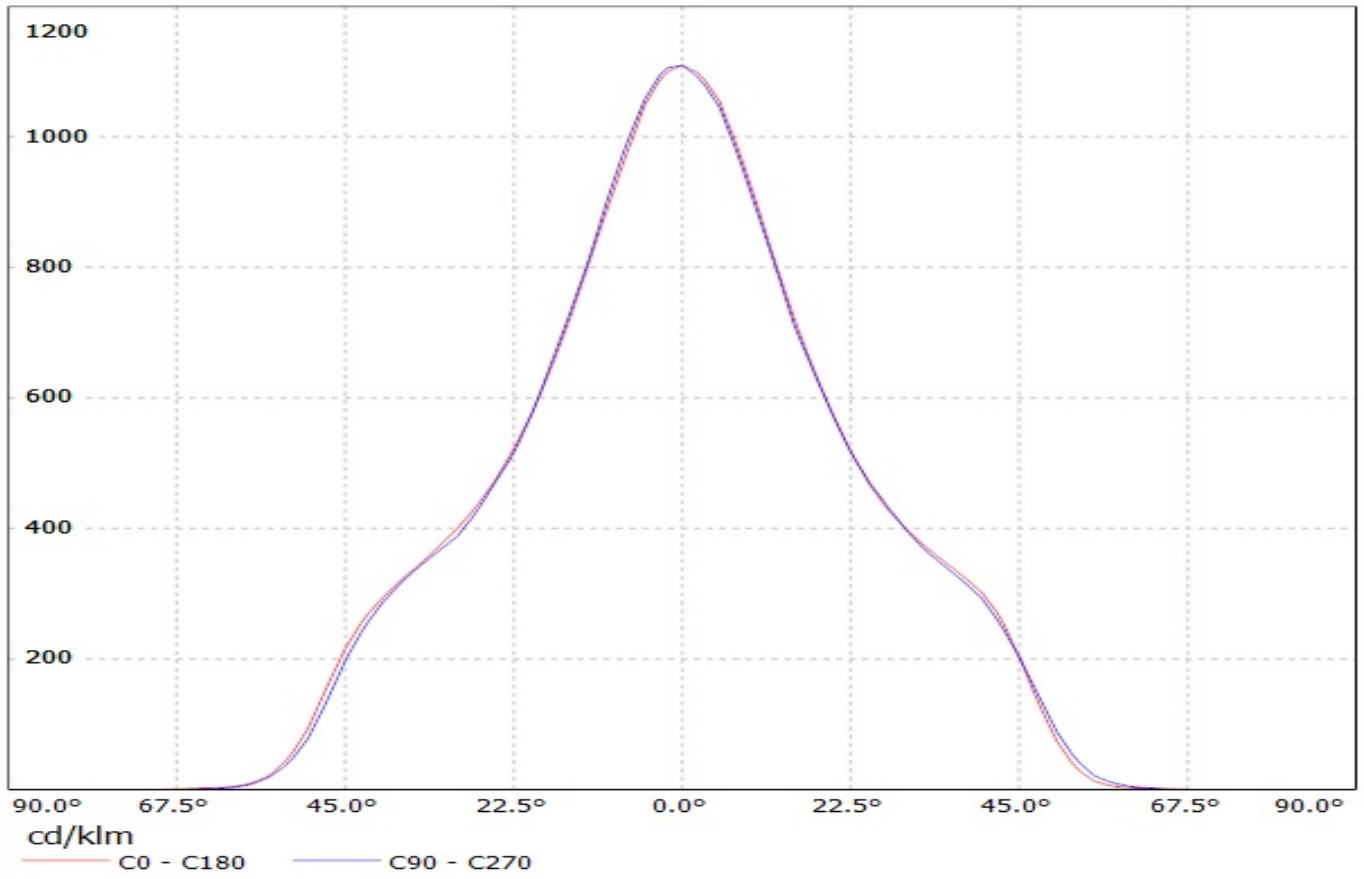


Luminaire: LEDiL Oy FC13975_ANGELINA-RZ-M_(NFDLJ130B+IDEAL)

Lamps: 1 x Nichia_NFDLJ130B_+50-2103NC_+50-2100AN_1422.52lm@250mA_CCT=4000K_P=8.91686W_I=0.25A

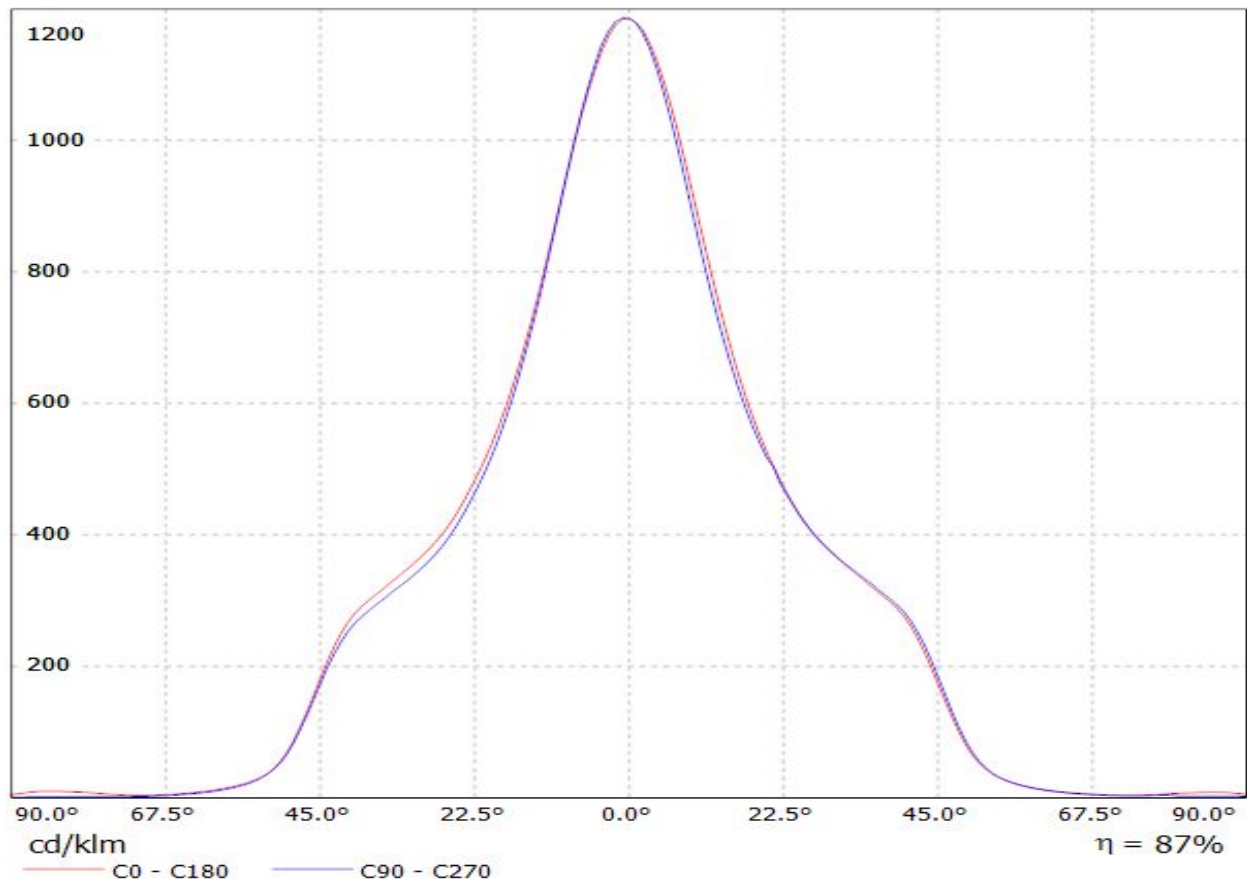


Luminaire: Ledil FC13975_ANGELINA-RZ-M_(PREVALED_Core_Z4)
Lamps: 1 x PREVALED_Core_Z4_LES19_1470.62lm@250mA_P=10.828W_I=0.25A

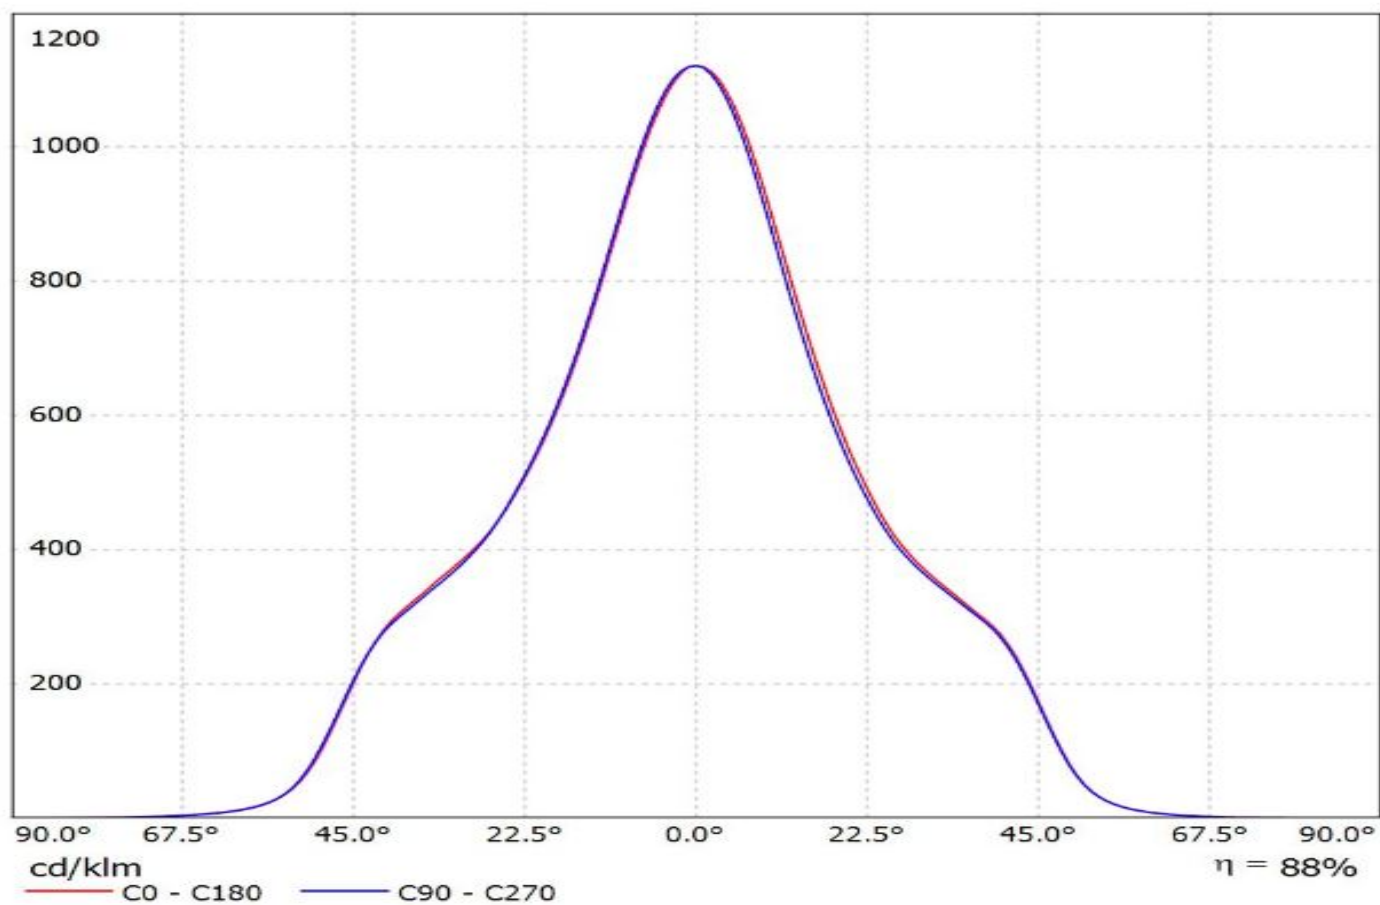


Luminaire: Ledil FC13975_ANGELINA-RZ-M_(SLM_G5_LES_15_+TE)

Lamps: 1 x Philips_SLM_G5_LES_15_+TE_2213194-1_1277.72lm@250mA_P=8.208W_I=0.25A

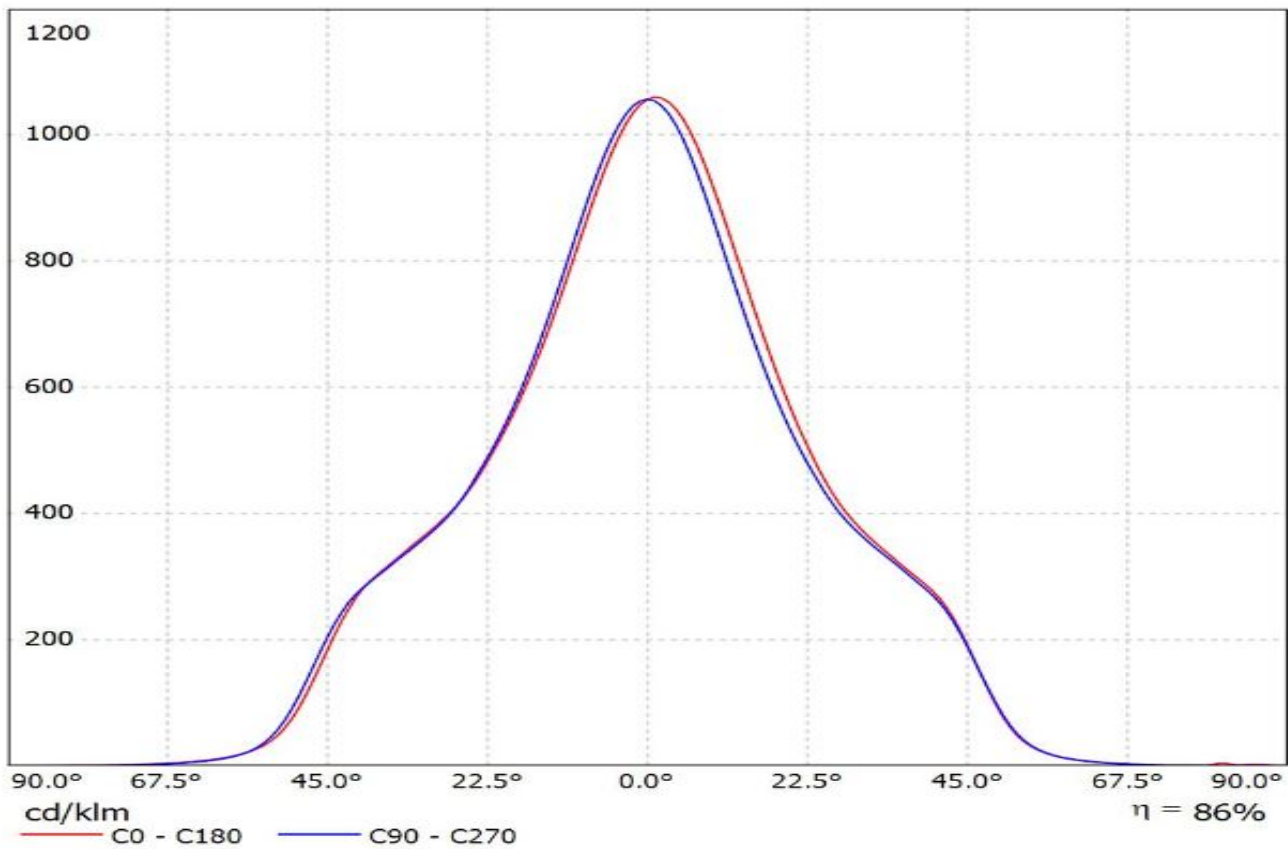


Luminaire: Ledil FC13975_ANGELINA-RZ-M_(SEOUL_AC_Zhaga_COB)
Lamps: 1 x SEOUL_AC_Zhaga_COB

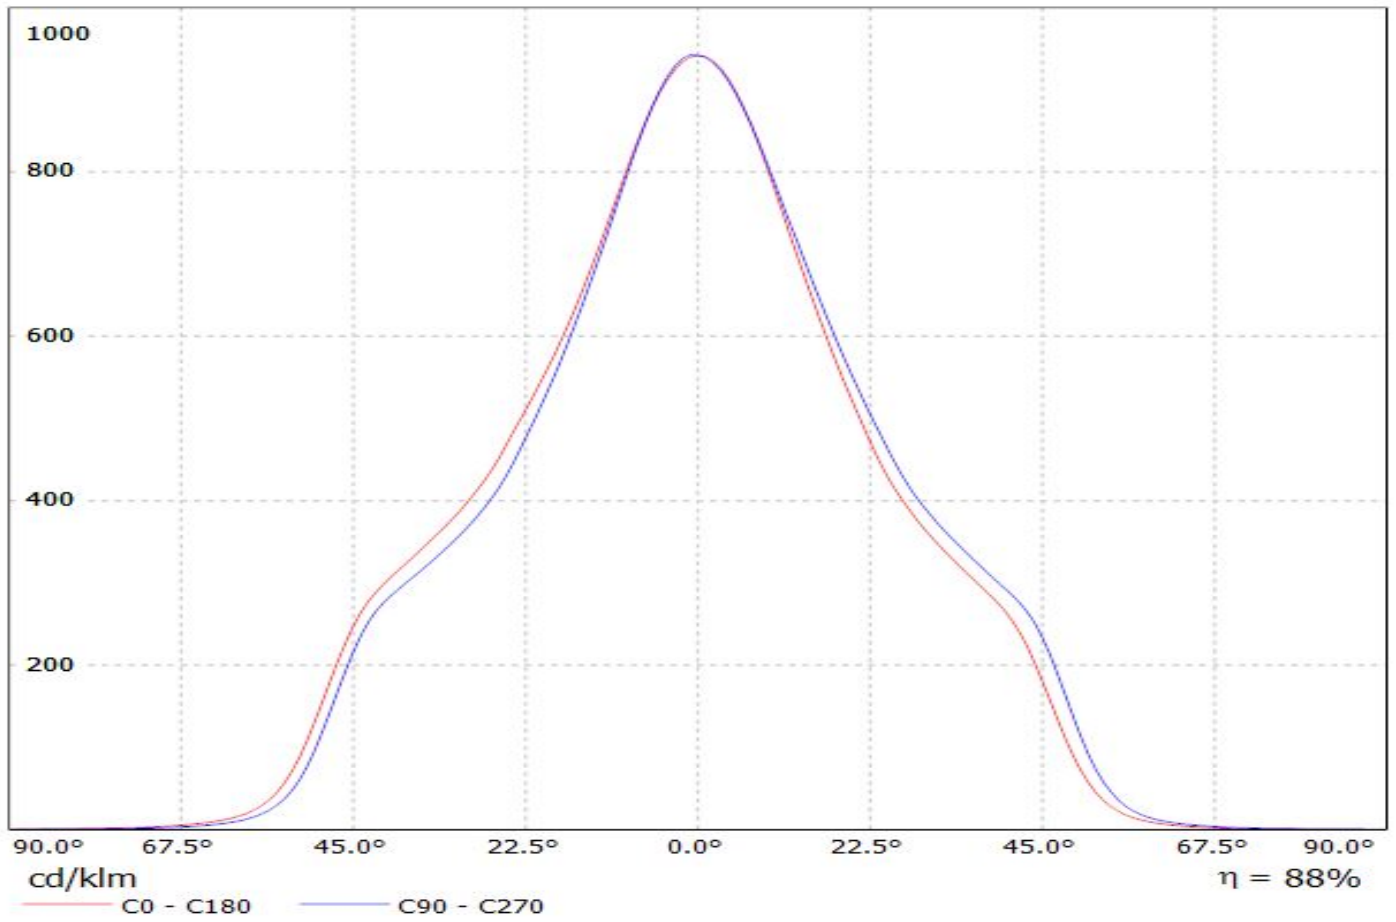


Ledil FC13975_ANGELINA-RZ-M_(MEZ_GW6) / LDC (Linear)

Luminaire: Ledil FC13975_ANGELINA-RZ-M_(MEZ_GW6)
Lamps: 1 x SHARP_Megazenigata_(GW6DME30NFC)
_1261.85lm@250mA_CCT=3038K_P=11.172W_I=0.25A

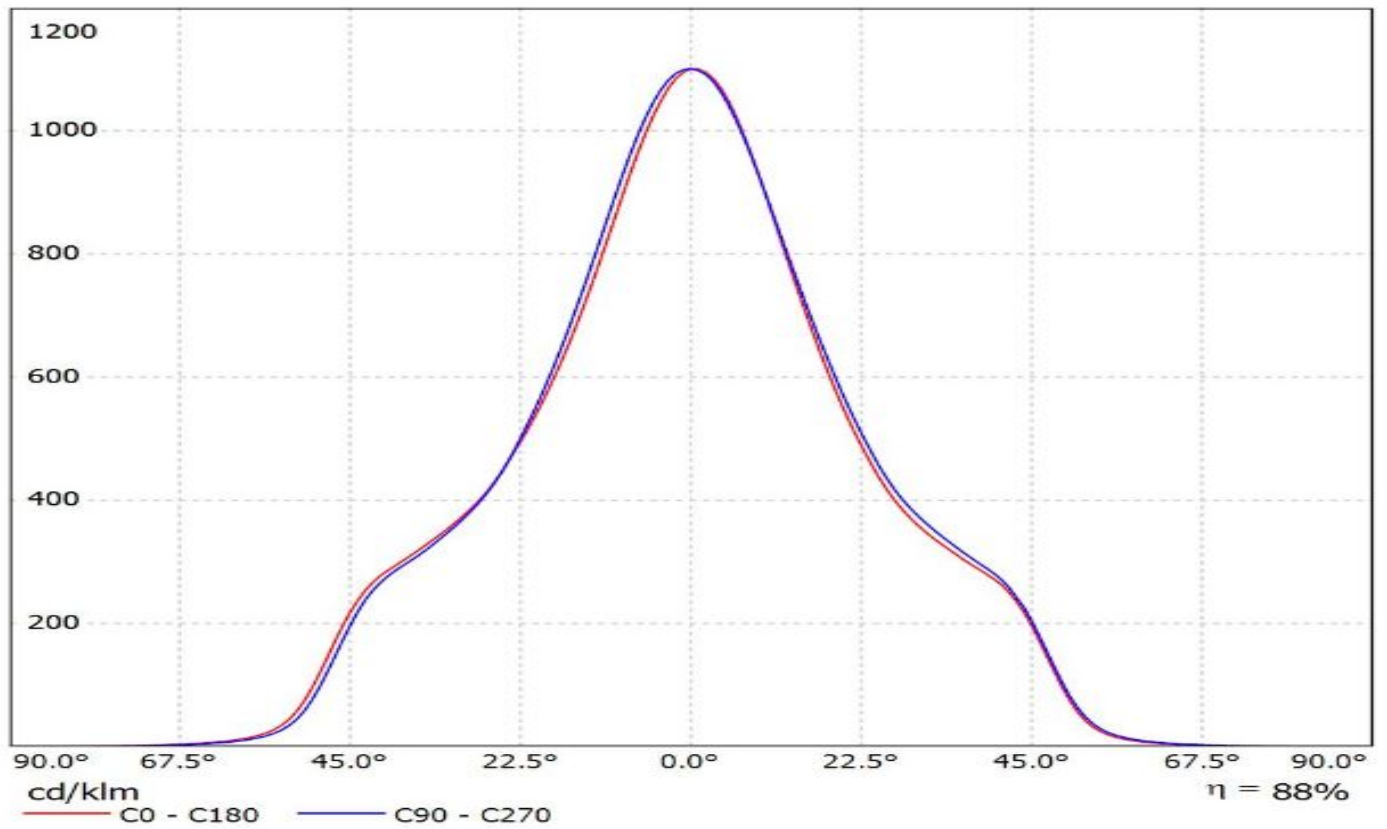


Luminaire: LEdil Oy FC13975_ANGELINA-RZ-M_(Luxeon_K12) Efficiency=89%
Lamps: 1 x Luxeon K12 (LXK8-PW40-0012) 930lm @ 250mA CCT=4000K P=8.2W I=250mA

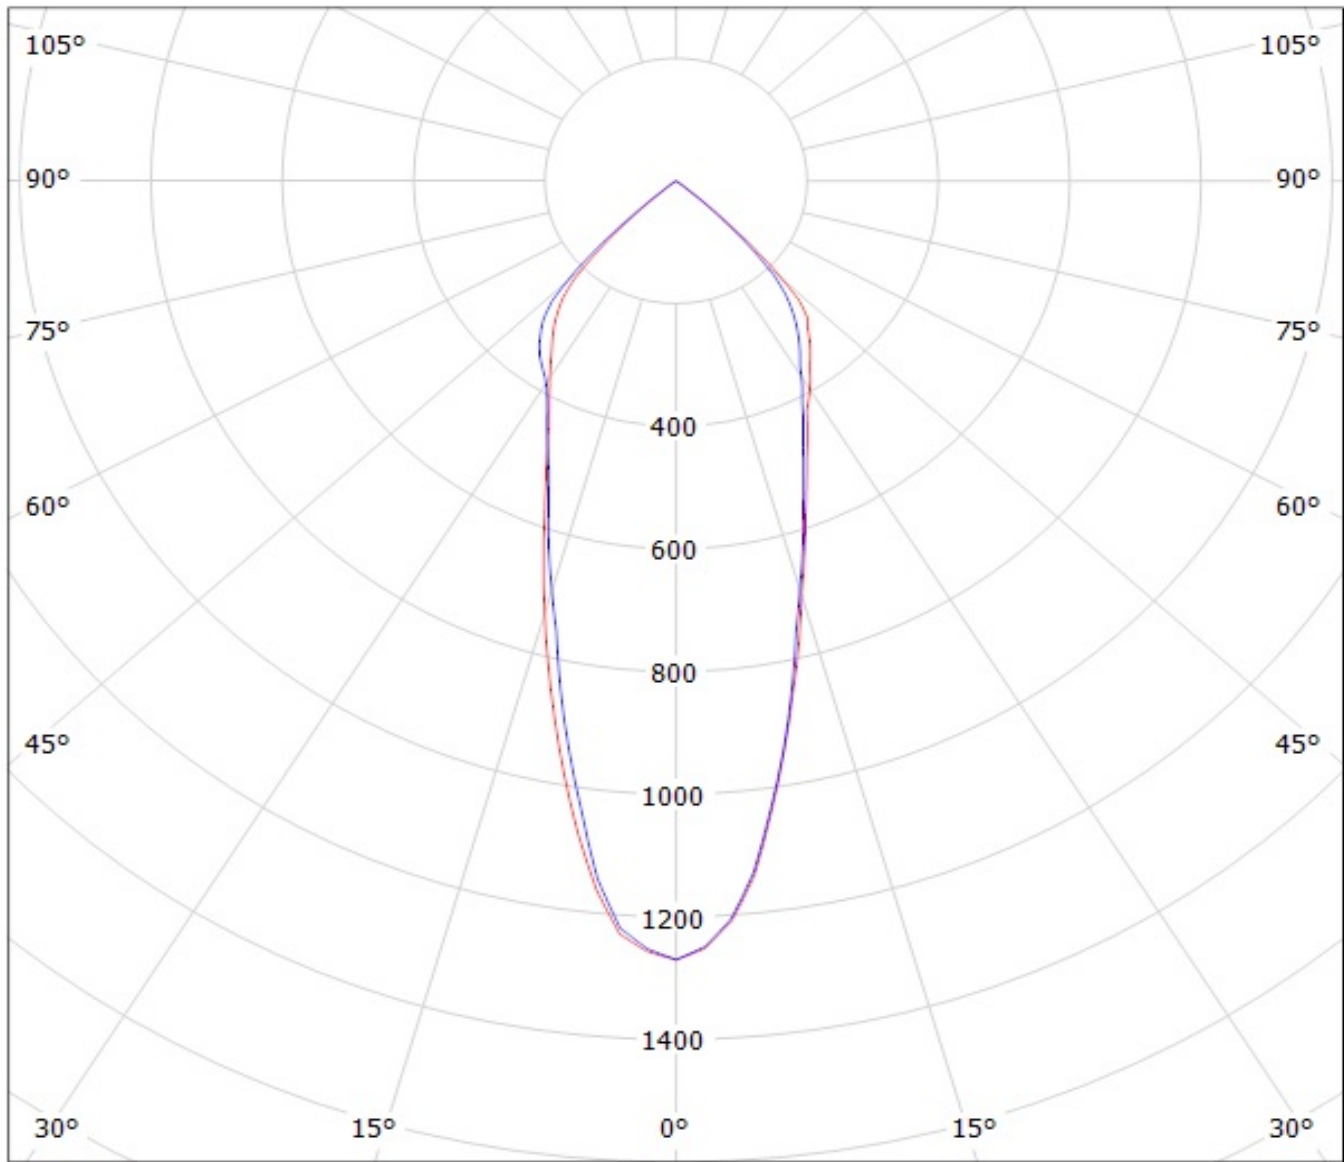

cd/klm
— C0 - C180 — C90 - C270

Luminaire: LEDil Oy FC13975_ANGELINA-RZ-M_(Luxeon_K16) Efficiency=89%
Lamps: 1 x Luxeon K16 (LXK8-PW40-0016) 1200lm @ 250mA CCT=4000K P=10.9W I=250mA

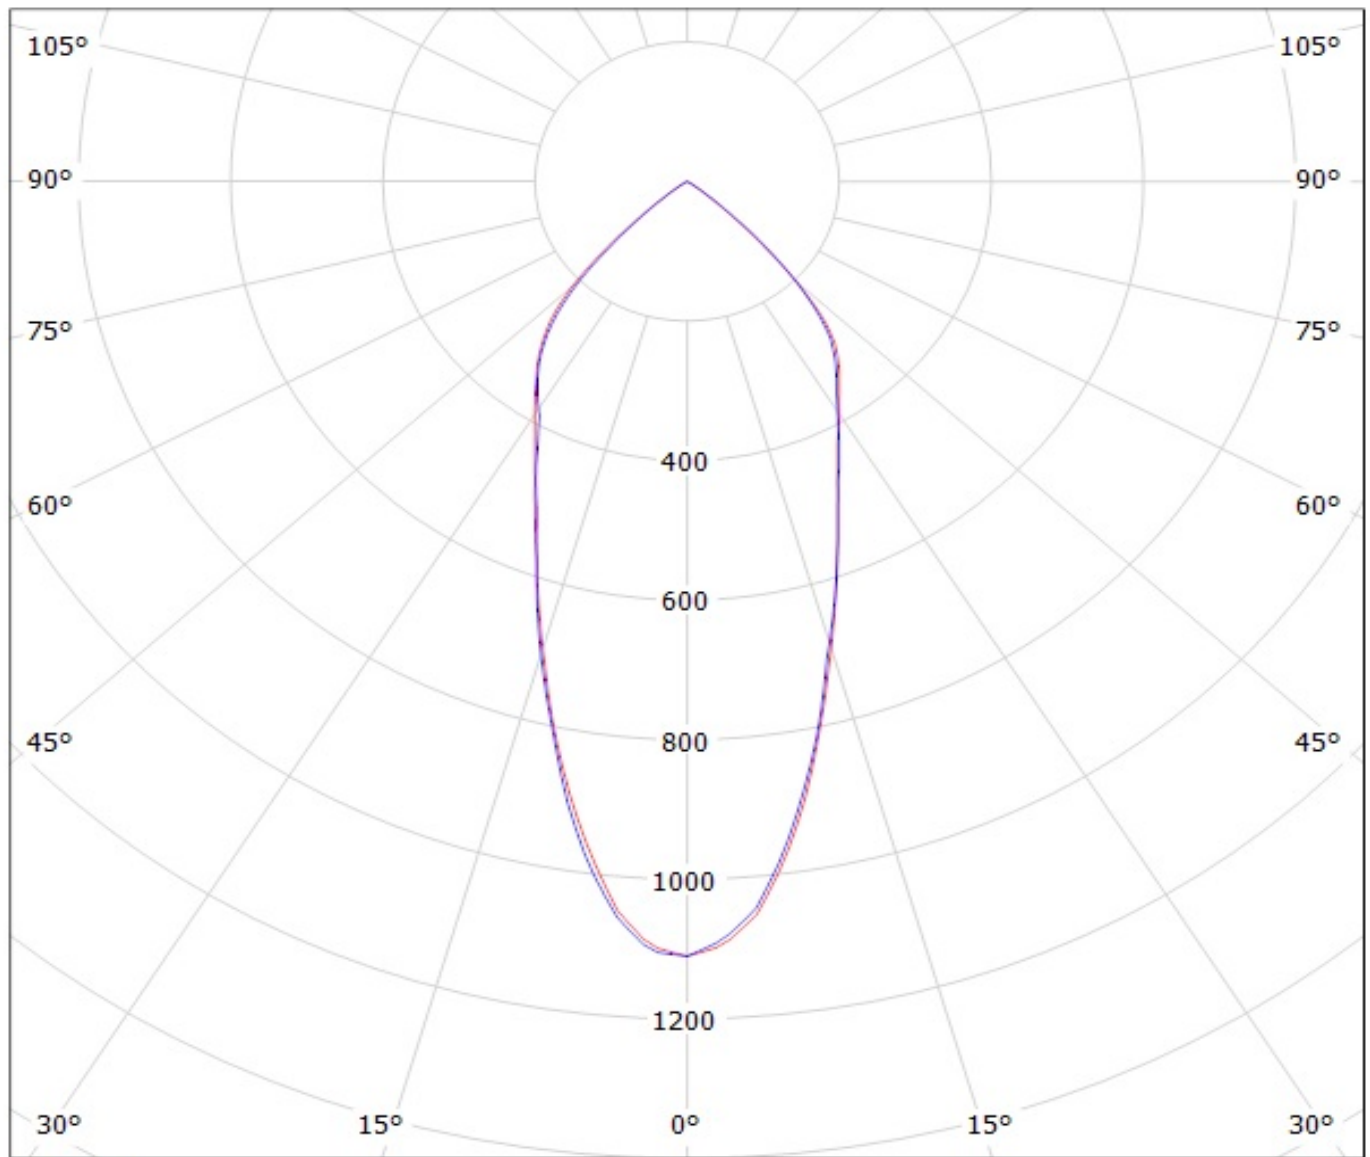


cd/klm

— C0 - C180 — C90 - C270

Luminaire: LEDiL Oy FC13975_ANGELINA-RZ-M_(NFDLJ130B+IDEAL)

Lamps: 1 x Nichia_NFDLJ130B_+50-2103NC_+50-2100AN_1422.52lm@250mA_CCT=4000K_P=8.91686W_I=0.25A

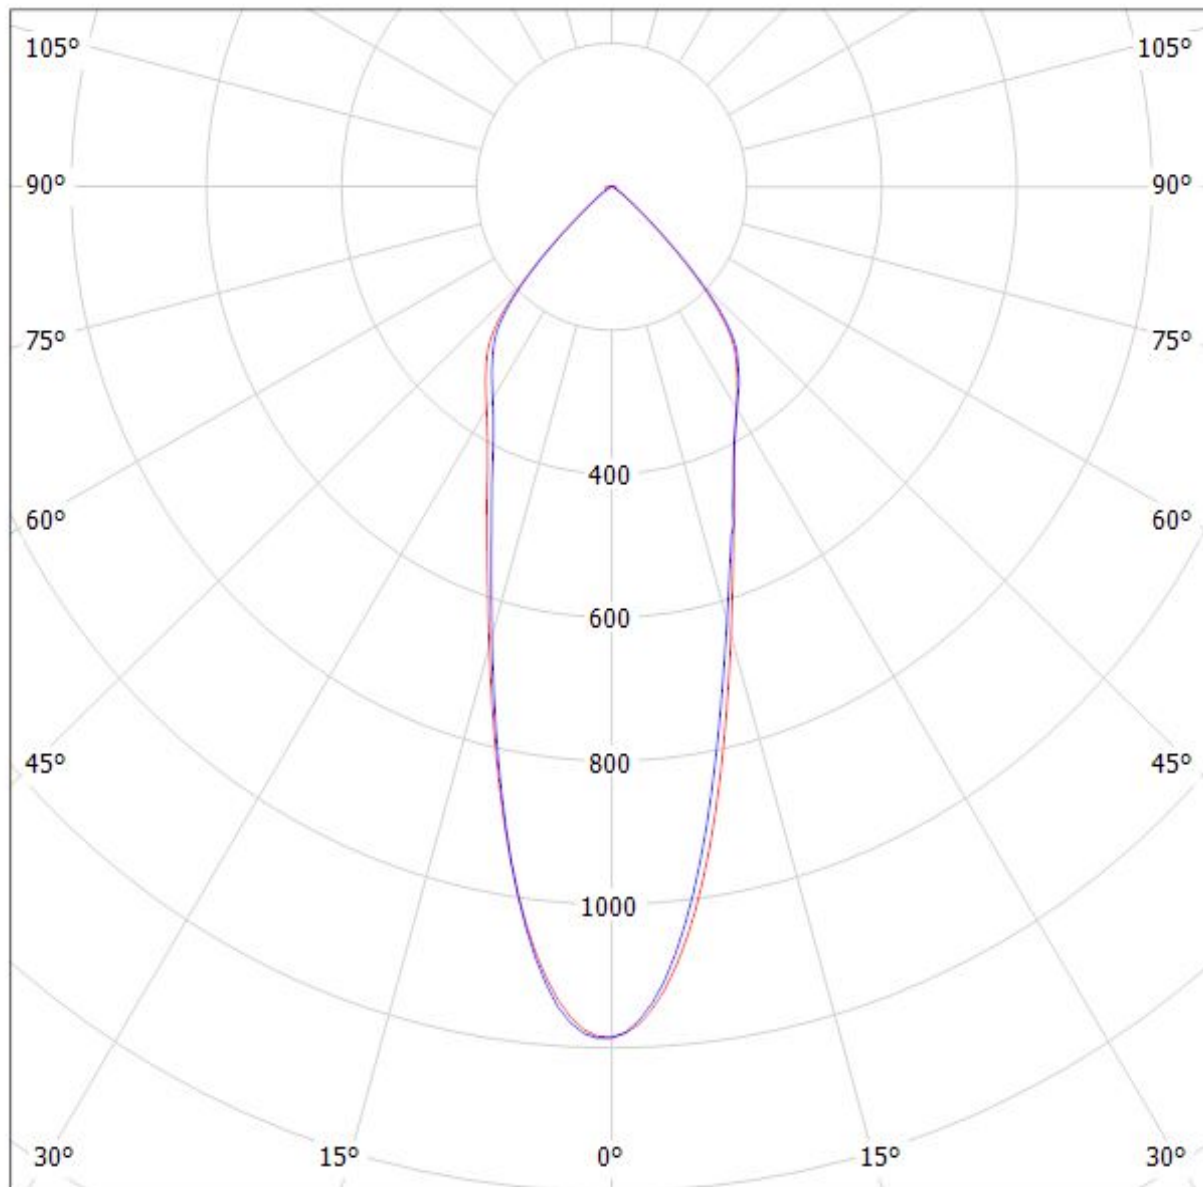


cd/klm

— C0 - C180 — C90 - C270

$\eta = 87\%$

Luminaire: Ledil FC13975_ANGELINA-RZ-M_(PREVALED_Core_Z4)

Lamps: 1 x PREVALED_Core_Z4_LES19_1470.62lm@250mA_P=10.828W_I=0.25A

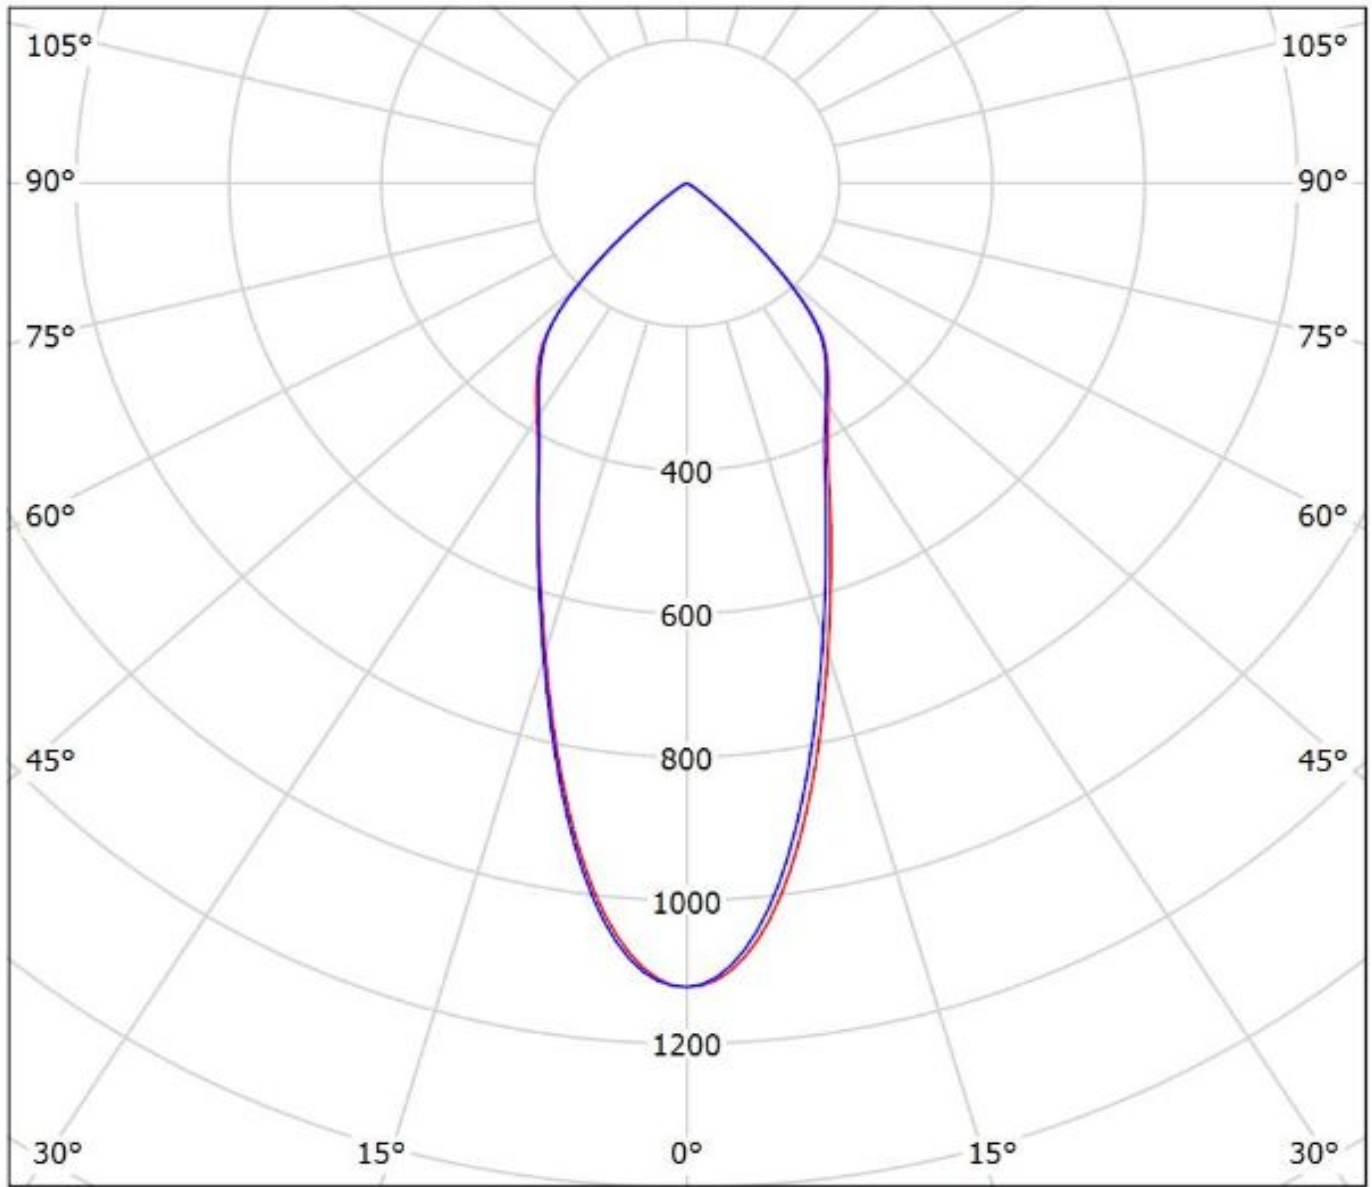

cd/klm


— C0 - C180

— C90 - C270

$\eta = 88\%$

Luminaire: Ledil FC13975_ANGELINA-RZ-M (SLM_G5_LES_15_+TE)

Lamps: 1 x Philips_SLM_G5_LES_15_+TE_2213194-1_1277.72lm@250mA_P=8.208W_I=0.25A

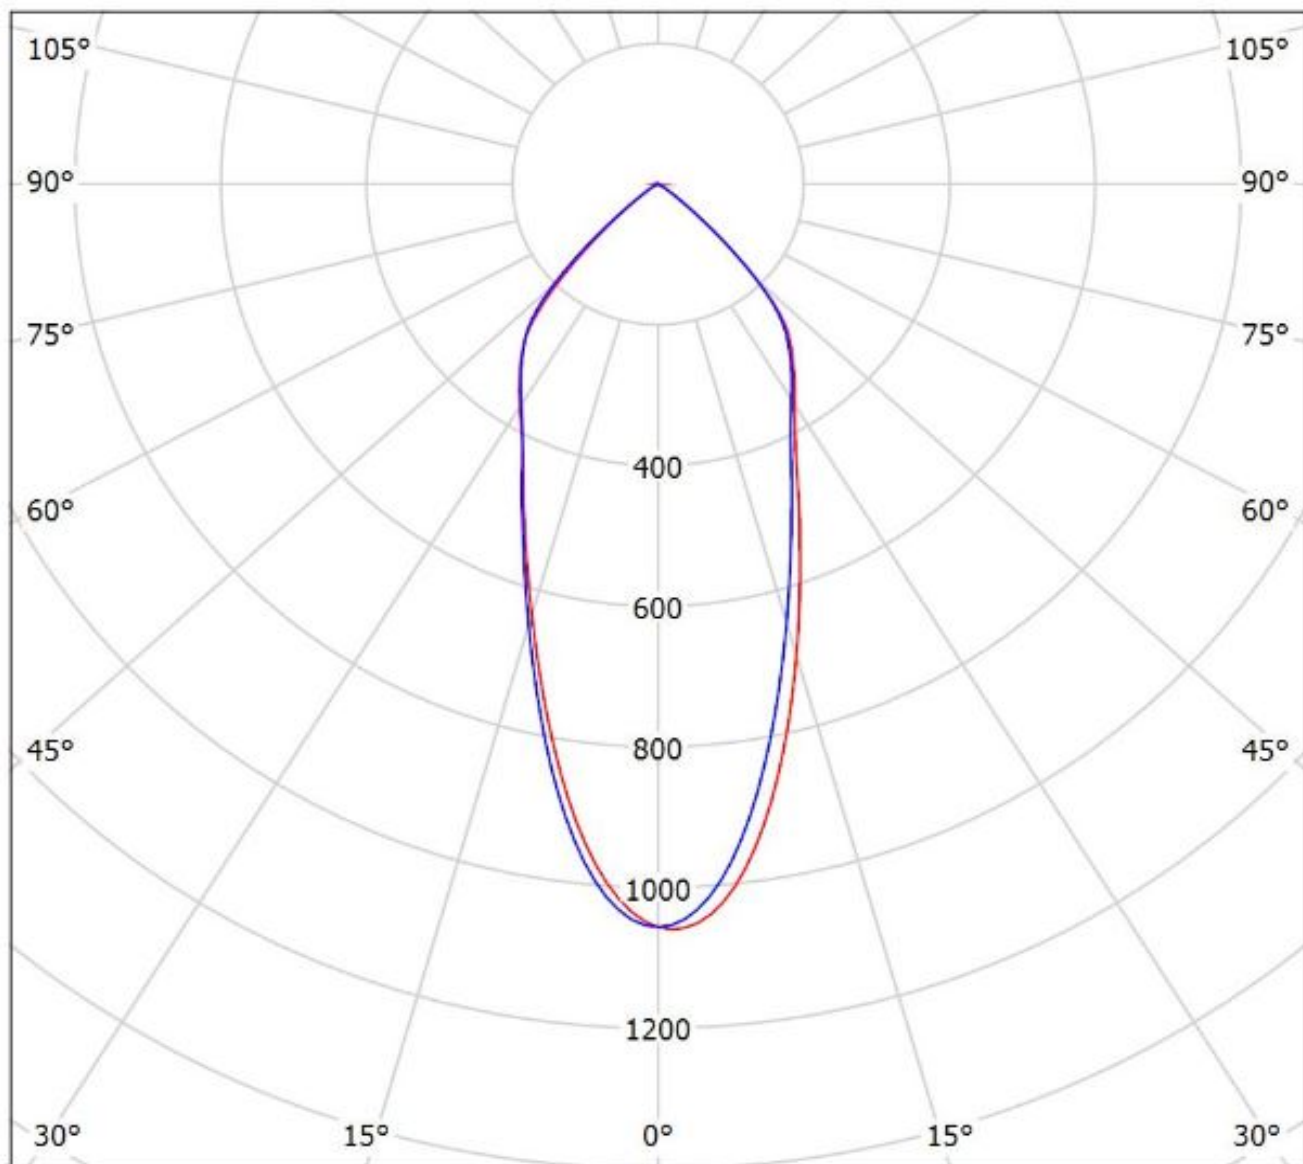


cd/klm

— C0 - C180 — C90 - C270


$\eta = 86\%$

Luminaire: Ledil FC13975_ANGELINA-RZ-M_(SEOUL_AC_Zhaga_COB)
Lamps: 1 x SEOUL_AC_Zhaga_COB

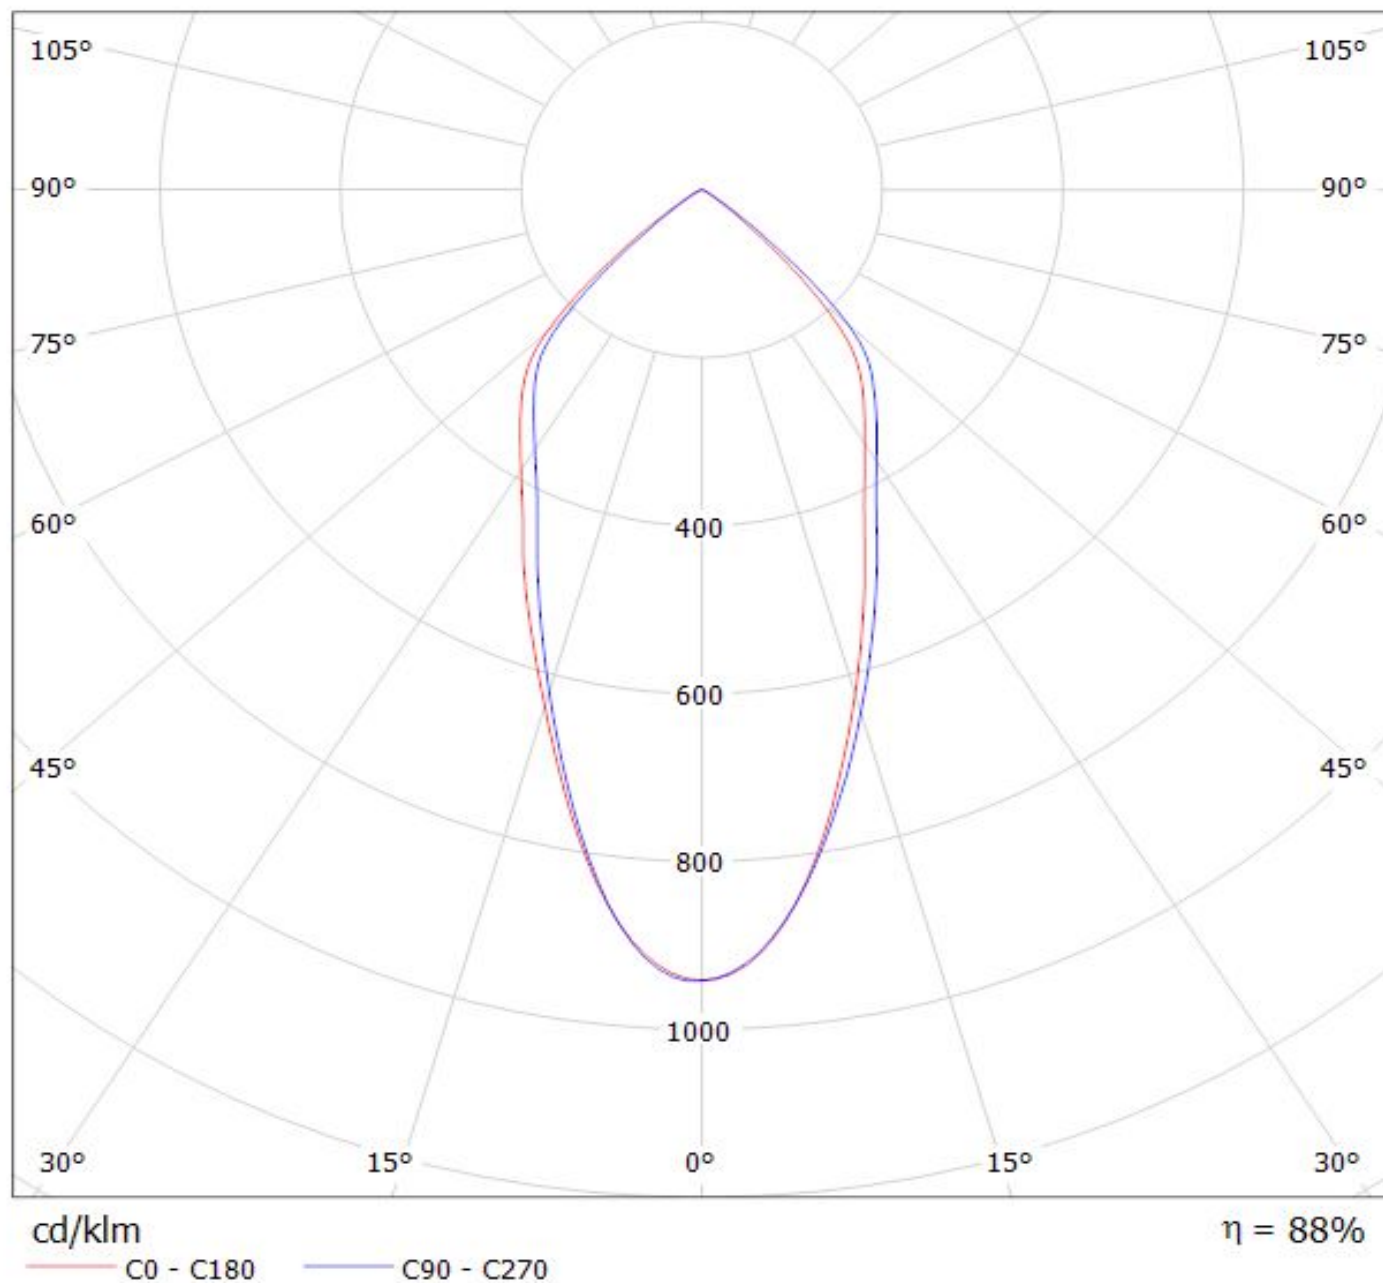

Ledil FC13975_ANGELINA-RZ-M_(MEZ_GW6) / LDC (Polar)

Luminaire: Ledil FC13975_ANGELINA-RZ-M_(MEZ_GW6)
Lamps: 1 x SHARP_Megazenigata_(GW6DME30NFC)
_1261.85lm@250mA_CCT=3038K_P=11.172W_I=0.25A

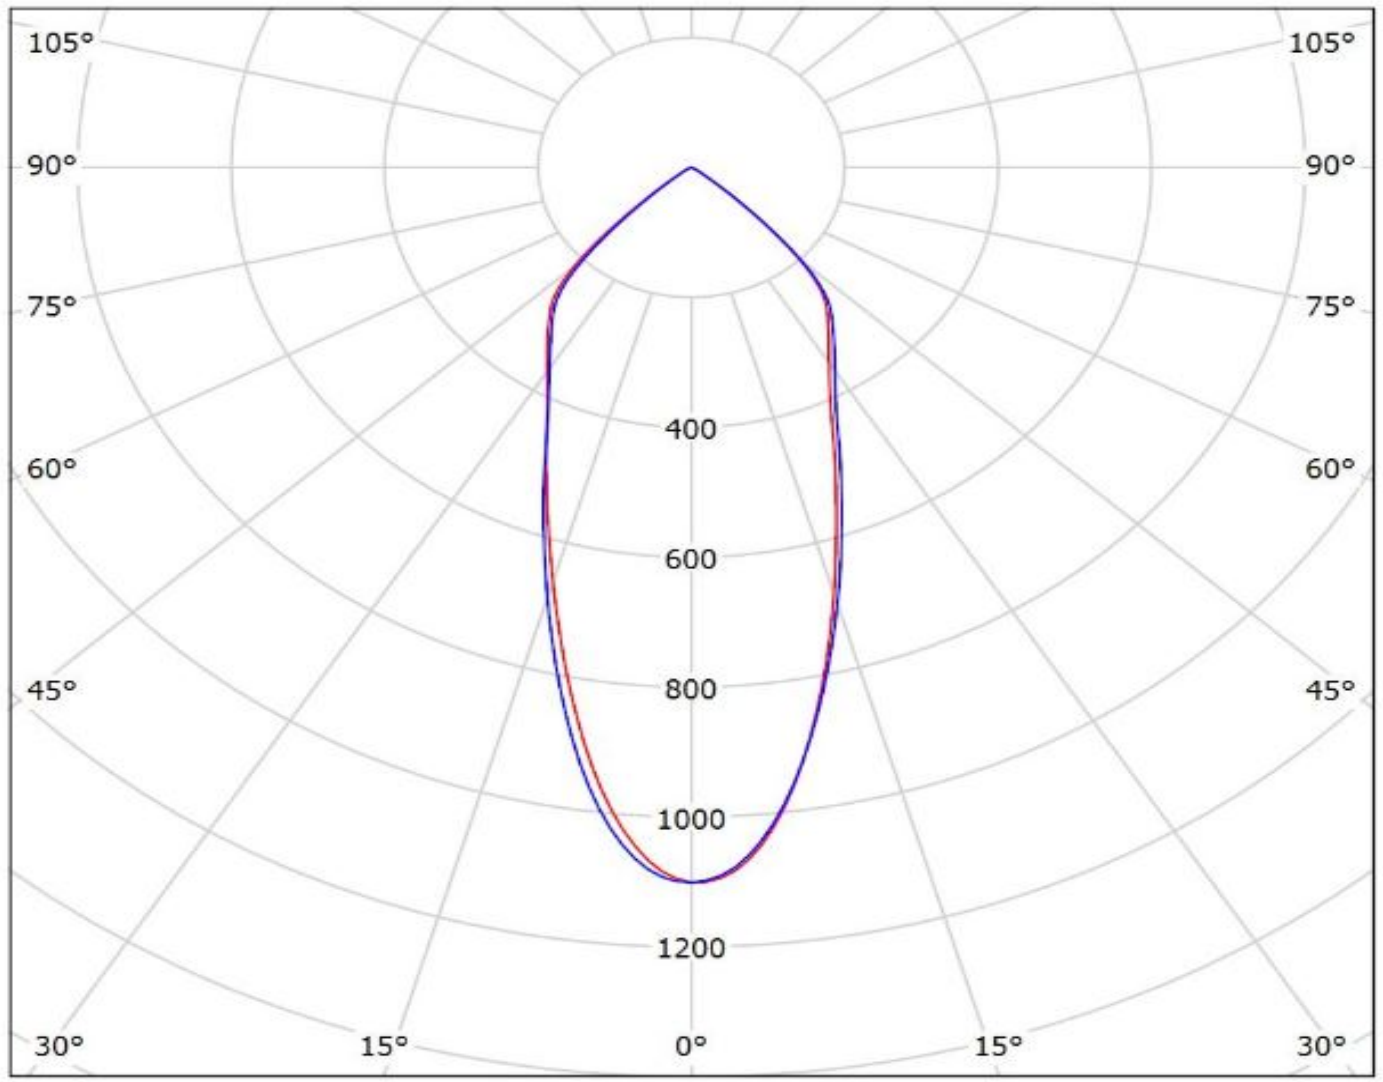

cd/klm

— C0 - C180 — C90 - C270

$\eta = 88\%$

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

GENERAL INFORMATION

- Product series especially designed & optimized for series of LEDs.
- Special care taken to make light distribution as uniform as possible.

Note! Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.