



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




**FC75-01-CA003**  
**FC75-01-CA006**  
**FC75-01-CA012**


NUMBER OF  
 CONDUCTORS  
 LENGTH IN FEET

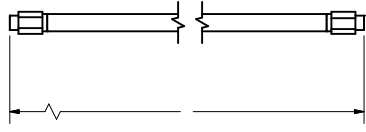


**FC75-02-CA003**  
**FC75-02-CA006**  
**FC75-02-CA012**

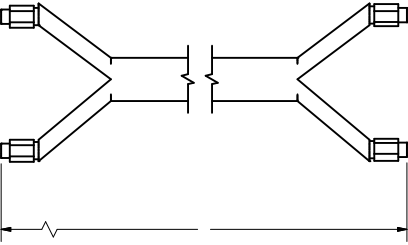

**FC75-04-CA003**  
**FC75-04-CA006**  
**FC75-04-CA012**

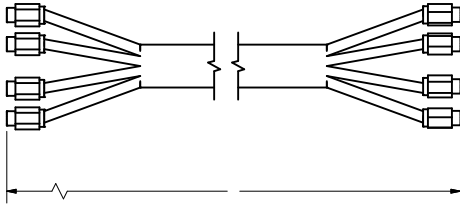

**FC75-08-CA003**  
**FC75-08-CA006**  
**FC75-08-CA012**

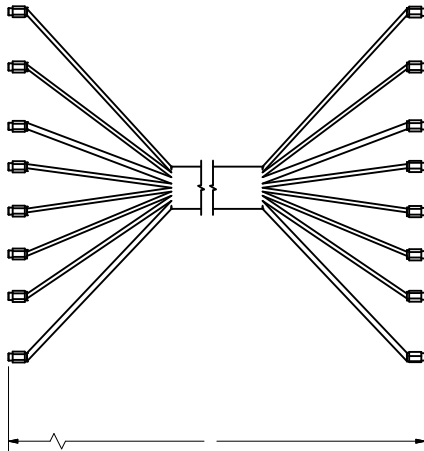

NOTES:

- 1 INSTALL CONNECTORS AND HEAT SHRINK AS NEEDED
- 2 THE ID, CHOICE OF BLACK HEAT SHRINK, AND CABLE SPLIT LENGTHS ARE PRODUCTION PREFERENCE
- 3 CONNECTIONS ARE ALL 1:1
- 4 CONDUCTORS: ULTRA FLEXIBLE, FINELY STRANDED, TINNED COPPER
- 5 SHIELDING: ULTRA FLEXIBLE, BRAIDED SHIELDS, WITH 90% NOMINAL COVERAGE
- 6 MINIMUM BEND RADIUS: 6X CABLE HEIGHT FOR INTERMEDIATE FLEX; 10X CABLE HEIGHT FOR CONTINUOUS FLEX
- 7 FLEX LIFE: 10,000,000 CYCLES NOMINAL
- 8 OUTER JACKET DUROMETER RATING: 65 (SHORE A)
- 9 TEMPERATURE RATING FOR CABLE: -65°C TO +165°C  
 TEMPERATURE RATING FOR FINISHED ASSEMBLY: -20°C TO +125°C
- 10 OUTER JACKET DIELECTRIC STRENGTH: 450 VOLTS/MILS (17.7 kv/mm)
- 11 \*OR EQUIVALENT

REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	BY
ALL	N/C	INITIAL RELEASE	09/06/2013	RR


FLEXIBLE COAX 75 OHM, FC75-01-CAXXX				
FN	QTY	DESCRIPTION	PART NUMBER	MFG
1	A/R	CICOIL CABLE	372R101-1	CICOIL LINX TECHNOLOG IES
2	2	SMA CONNECTOR	CON SMA007*	TECHNOLOG IES
3	A/R	BLACK HEAT SHRINK (-55°C TO +135°C)	MANUFACTURING DISCRETION	---

FLEXIBLE COAX 75 OHM, FC75-02-CAXXX				
FN	QTY	DESCRIPTION	PART NUMBER	MFG
1	A/R	CICOIL CABLE	372R101-2	CICOIL LINX TECHNOLOG IES
2	4	SMA CONNECTOR	CON SMA007*	TECHNOLOG IES
3	A/R	BLACK HEAT SHRINK (-55°C TO +135°C)	MANUFACTURING DISCRETION	---

FLEXIBLE COAX 75 OHM, FC75-04-CAXXX				
FN	QTY	DESCRIPTION	PART NUMBER	MFG
1	A/R	CICOIL CABLE	372R101-4	CICOIL LINX TECHNOLOG IES
2	8	SMA CONNECTOR	CON SMA007*	TECHNOLOG IES
3	A/R	BLACK HEAT SHRINK (-55°C TO +135°C)	MANUFACTURING DISCRETION	---

FLEXIBLE COAX 75 OHM, FC75-08-CAXXX				
FN	QTY	DESCRIPTION	PART NUMBER	MFG
1	A/R	CICOIL CABLE	372R101-8	CICOIL LINX TECHNOLOG IES
2	16	SMA CONNECTOR	CON SMA007*	TECHNOLOG IES
3	A/R	BLACK HEAT SHRINK (-55°C TO +135°C)	MANUFACTURING DISCRETION	---

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CICOIL LLC AND ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF EQUIPMENT WITHOUT PERMISSION.



VIEW PROJECTION

DASH NO	QTY REQD	NEXT ASSEMBLY	FINAL ASSEMBLY
APPLICATION			

STANDARD TOLERANCES UNLESS OTHERWISE NOTED  
 DIMENSIONS ARE IN INCHES  
 .X+/- 0.5  
 .XX+/-0.05  
 .XXX+/-0.005  
 ANGLES +/- 5 DEG [MM]  
 MATERIAL:  
 DO NOT SCALE DRAWING

SIGNATURE	DATE
DRAWN: rruiz	9/5/2013
CHECK: JOHN PALAHNUK	9/6/2013
ENGINEER: JOHN PALAHNUK	9/6/2013

24960 AVENUE TIBBITTS, VALENCIA, CA 91355 www.cicoil.com 661-295-1295

TITLE: **FLEXIBLE COAX**

CAGE CODE: 19476    SIZE:    DRAWING NUMBER: FC-75-0X-CAXXX    REVISION: N/C

SCALE:    FILE: FC-75-0X (C).idw    SHEET 1 OF 3