imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





PRODUCT DATASHEET ANGELINA series last update 3/11/2016


DETAILS

Product Number	FCN13575_ANGELINA-W			
Family	ANGELINA			
Туре	RefPack			
Color	metal			
Diameter	82 mm			
Height	36,94 mm			
Style	round			
Optic Material				
Holder Material				
Fastening	screw			
Status	production ready			
ROHS Comliant	Yes			
Date Updated	3/11/2016			




OPTICAL PROPERTIES


	Viewing	Light	Effi-		
LED	Angle	Beam	ciency	cd/Im	Connector
LUXEON S2000	42 deg	Wide	92 %	1.300	LEDiL: LEDiL

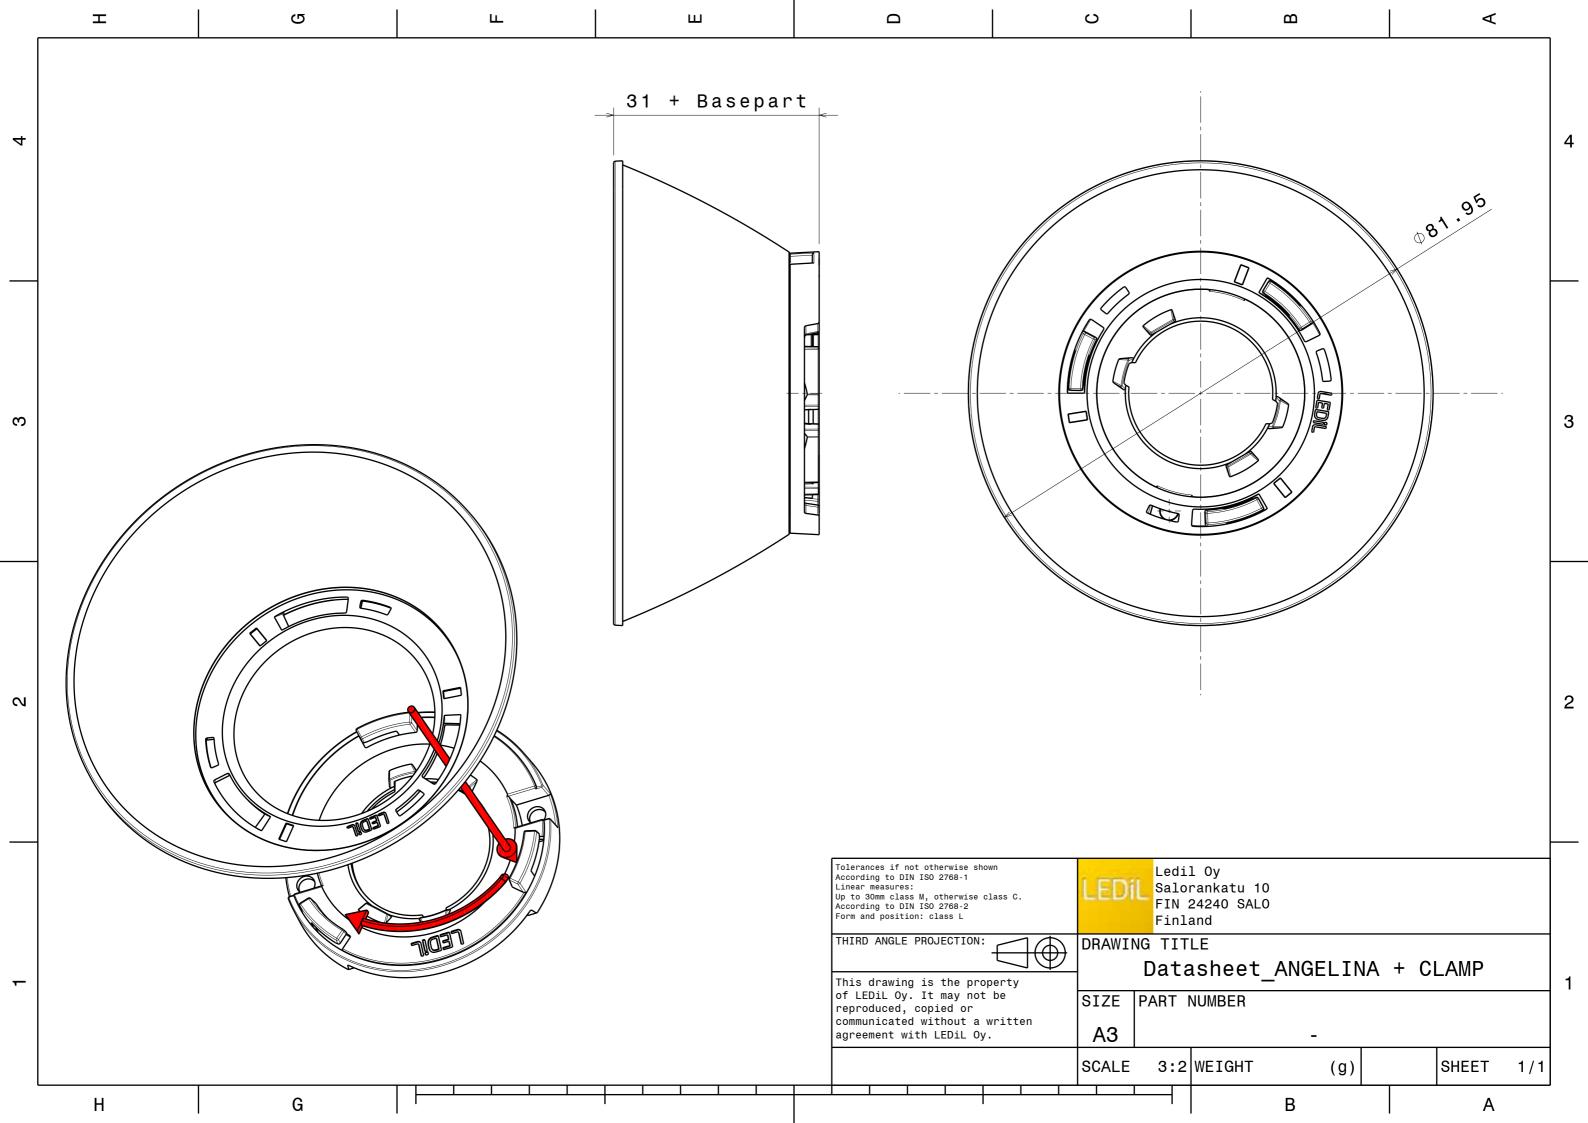

Luminaire: LEDiL Oy FCN13575_ANGELINA-W_(Luxeon_S2000) Eff.92.0% Lamps: 1 x Luxeon S2000 448.926Im@100mA CCT=3000K P=5W I=100mA

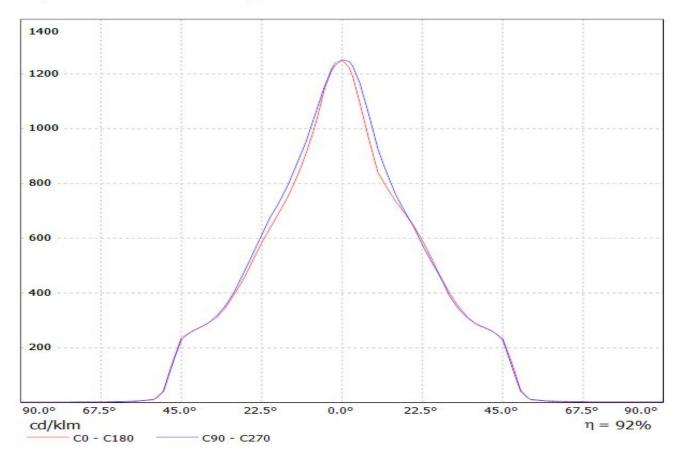

Luminaire: LEDiL Oy FCN13575_ANGELINA-W_(Luxeon_S2000) Eff.92.0% Lamps: 1 x Luxeon S2000 448.926Im@100mA CCT=3000K P=5W I=100mA

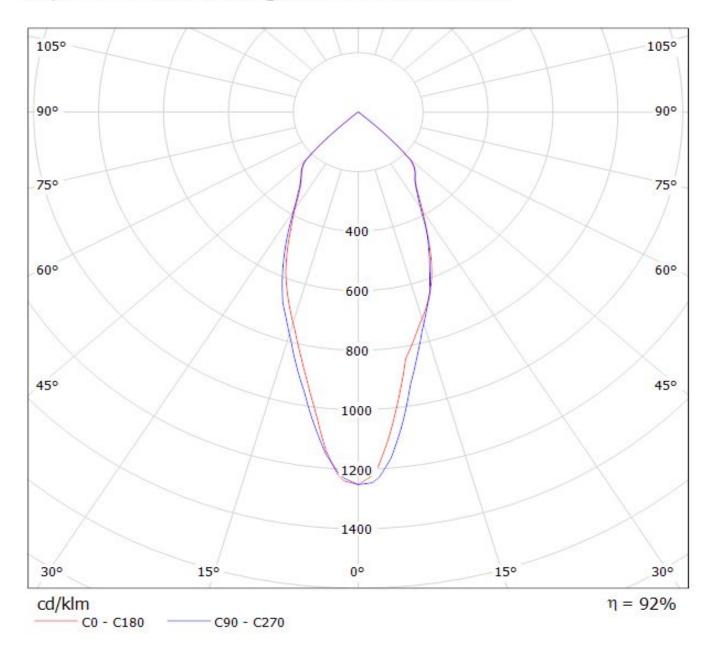

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.