

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









February 2009

FFA20U40DN


Features

- · Ultrafast with soft recovery
- · Low forward voltage

Applications

- Power switching circuits
- Output rectifiers
- Freewheeling diodes
- · Switching mode power supply
- · RoHS Compliant





1. Anode 2. Cathode 3. Anode



ULTRA FAST RECOVERY POWER RECTIFIER

Absolute Maximum Ratings (per diode) T_C=25°C unless otherwise noted

Symbol	Parameter	Value	Units
V _{RRM}	Peak Repetitive Reverse Voltage	400	V
I _{F(AV)}	Average Rectified Forward Current @T _C = 100°C	20	Α
I _{FSM}	Non-repetitive Peak Surge Current 60Hz Single Half-Sine Wave	200	Α
T _{J,} T _{STG}	Operating Junction and Storage Temperature	- 65 to +150	°C

Thermal Characteristics

Symbol	Parameter	Value	Units	
R _{e,IC}	Maximum Thermal Resistance, Junction to Case	2.0	°C/W	

Electrical Characteristics (per diode) T_C=25 °C unless otherwise noted

Symbol	Parameter		Min.	Тур.	Max.	Units
V _{FM} *	Maximum Instantaneous Forward Voltage					V
	I _F = 20A	T _C = 25 °C	-	-	1.4	
	I _F = 20A	T _C = 25 °C T _C = 100 °C	-	-	1.3	
I _{RM} *	Maximum Instantaneous Reverse Current					μΑ
	@ rated V _R	$T_C = 25 ^{\circ}C$	-	-	50	
		$T_C = 25 ^{\circ}C$ $T_C = 100 ^{\circ}C$	-	-	500	
t _{rr}	Maximum Reverse Recovery Time		-	-	50	ns
Irr	Maximum Reverse Recovery Current		-	-	5.5	Α
Q_{rr}	Maximum Reverse Recovery Charge		-	-	138	nC
	$(I_F = 20A, di/dt = 200A/\mu s)$					
W _{AVL}	Avalanche Energy	1.0	-	-	mJ	

^{*} Pulse Test: Pulse Width=300μs, Duty Cycle=2%

Typical Characteristics

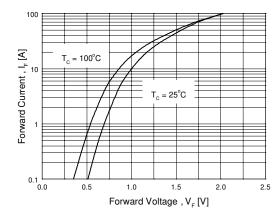


Figure 1. Typical Forward Voltage Drop vs. Forward Current

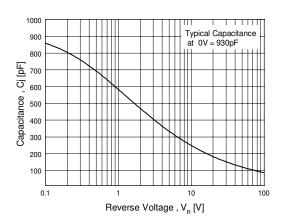


Figure 3. Typical Junction Capacitance

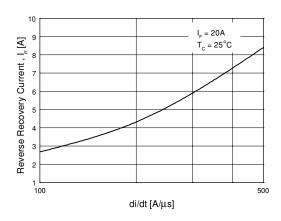


Figure 5. Typical Reverse Recovery Current vs. di/dt

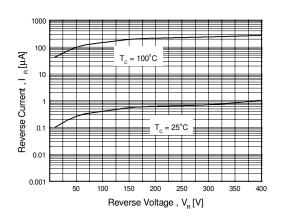


Figure 2. Typical Reverse Current vs. Reverse Voltage

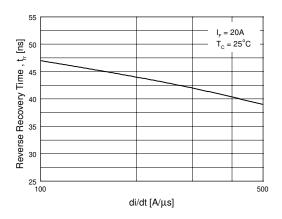


Figure 4. Typical Reverse Recovery Time vs. di/dt


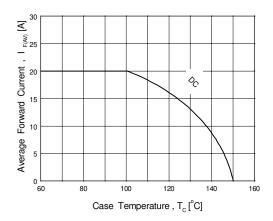


Figure 6. Forward Current Derating Curve





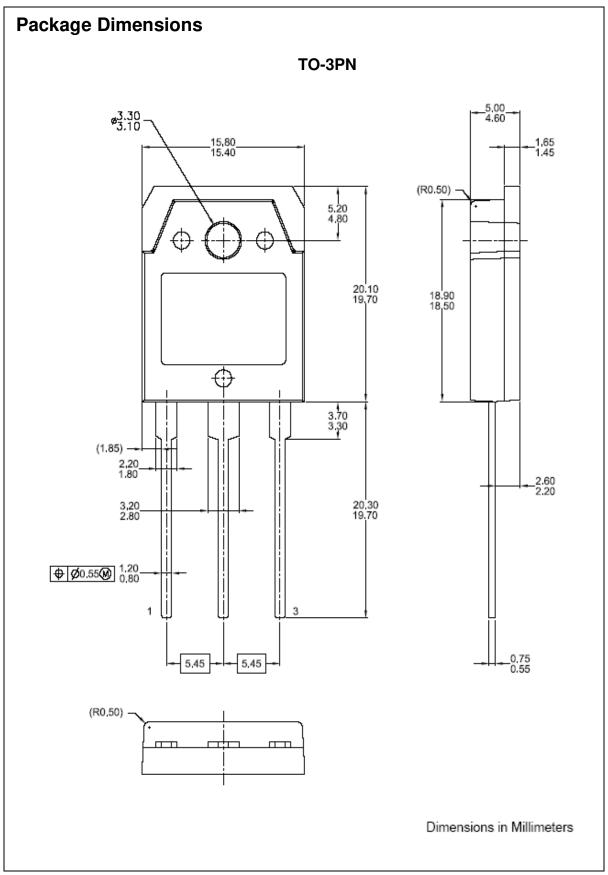

TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

Build it Now™
CorePLUS™
CorePOWER™
CROSSVOLT™

CTL™
Current Transfer Logic™
EcoSPARK®
EfficentMax™
EZSWITCH™ *

Fairchild[®]
Fairchild Sem

Fairchild Semiconductor® FACT Quiet Series™ FACT® FAST®

FACT®
FAST®
FastvCore™
FlashWriter®
FPS™
F-PFS™

FRFET[®]
Global Power Resource SM Green FPS™

Green FPS™ e-Series™ GTO™ IntelliMAX™ ISOPLANAR™

MegaBuck™
MICROCOUPLER™
MicroFET™
MicroPak™
MillerDrive™
MotionMax™
Motion-SPM™
OPTOLOGIC®
OPTOPLANAR®

PDP SPMTM
Power-SPMTM
PowerTrench[®]
PowerXSTM

Programmable Active Droop™
QFET®
QS™
Quiet Series™
RapidConfigure™

O_{TM}

Saving our world, 1mW/W/kW at a time™

SmartMax™
SMART START™
SPM®
STEALTH™
SuperFET™
SuperSOT™-3
SuperSOT™-6
SuperSOT™-8
SupreMOS™
SyncFET™
SYSTEM®
GENERAL
The Power Franchise®

the properties the

SerDes*
UHC®
Ultra FRFET™
UniFET™
VCX™
VisualMax™
XS™

* EZSWITCH™ and FlashWriter® are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCI AIMED

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Definition of Terms					
Datasheet Identification	Product Status	Definition			
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.			
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.			
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.			
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.			

Rev. 138