

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China












DO NOT SCALE FROM THIS PRINT

(FFMD-10-D-XX.XX-01-X SHOWN)

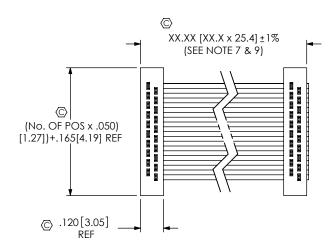

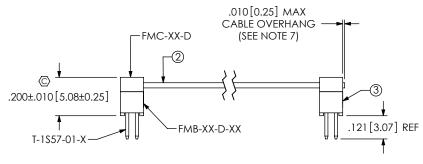

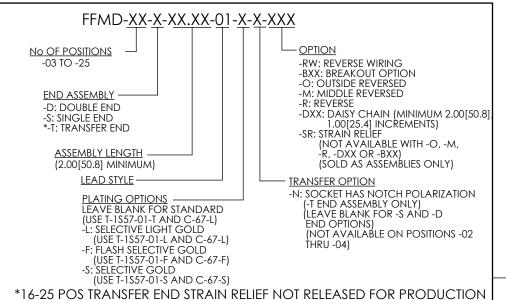





TABLE 1	
ITEM #	PART
1	FFSD-XX-XX-X-N
2	CB-XX-30-7
3	FFMD-XX-XX-X-XX
4	FFMD-XX-01-X-SR
5	FFSR-XX-01
6	FFSR-XX-02
7	FFSD-XX-XX-X-N-SR1
8	FFSD-XX-XX-X-N-SR2

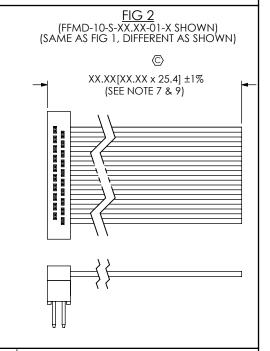

NOTES:

- 1. © REPRESENTS A CRITICAL DIMENSION.
- 2. FFSD ASSEMBLY TO BE USED FOR TRANSFER END ONLY. ©3. ALL ASSEMBLIES TO BE 100% ELECTRONICALLY TESTED

 - FOR SHORTS AND OPENS.
 4. ALL ASSEMBLIES TO BE 100% HI-POT TESTED AT 630V.
 - 5. STRAIN RELIEF TO WITHSTAND 5LB[22N] STRAIGHT PULL. 6. FFMD CABLE ASSEMBLIES ARE LEAD FREE.
 - 7. WHEN CUTTING CABLE TO LENGTH, CONDUCTORS SHOULD NOT EXTEND PAST THE CABLE INSULATION, EXTENDING LESS THAN 25% OF CABLE THICKNESS ON CONSECUTIVE AND LESS THAN 50% OF CABLE THICKNESS ON NON-CONSECUTIVE STRANDS IS CONSIDERED A PROCESS INDICATOR.

 8. REFERENCE FFMD-XX-XX-XX (AND FFSD-XX-XX-X-N-XX)
 - FOR -T OPTION) DRAWING FOR CONNECTOR ASSEMBLY DIMENSIONS AND ITS REQUIREMENTS
 - 9. FOR LENGTHS LESS THAN 12.5" TOLERANCE SHALL BE +/-.125, ALL OTHER LENGTHS SHALL BE +/-1%.

F:\DWG\SW\Exisprod\Assembly\Cable\FFMD-XX-X-XX.XX-01-X-X-XXX-ASM.SLDDRW

UNLESS OTHERWISE SPECIFIED. DIMENSIONS ARE IN INCHES. TOLERANCES ARE:

DECIMALS **ANGLES**

.XX: ±.01 [.3] .XXX: ±.005 [. 2° .13] .XXXX: ±.0020 [.051]

PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO

SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC

SHEET SCALE: 2:1

DO NOT SCALE DRAWING INSULATOR: PBT, COLOR: BLACK

CONTACT: BeCu TERMINAL: PHOS BRONZE

WIRE: 30 AWG, 7/38, TINNED, STRANDED WITH **PVC INSULATOR**



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FA e-Mail: info@SAMTEC.com FAX: 812-948-5047

.050 X .050 DOUBLE ROW MALE IDC CABLE ASSEMBLY

FFMD-XX-X-XX.XX-01-X-X-XXX

BY: T NEWTON 02/15/2008 | SHEET 1 OF 5

