



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





FIBERGLASS BASE STATION ANTENNAS FEATURE INDUSTRY-LEADING DESIGN COMPONENTS THAT PERFORM IN EXTREME CONDITIONS

Laird Technologies' fiberglass base station antennas are collinear designs enclosed in a high density fiberglass, which is covered with a protective ultraviolet inhibiting coating.

The radiating elements are made from high efficiency copper and are carefully phased to provide maximum gain in the horizontal plane. The mounting sleeves are tuned to eliminate RF currents from the transmission line, resulting in a "cold" sleeve allowing great freedom in mounting. This high quality and well-focused beam provides the highest gain and best efficiency.

FEATURES AND BENEFITS:


- Every FG fiberglass base antenna is tested on a network analyzer before shipping to assure the best performance.
- Special UV Treated - stands up to the sun
- Durable gold anodized sleeve and cap with N Female connector
- Custom tuning available
- FedEx / UPS Shippable

APPLICATIONS:


- Omnidirectional (circular) outdoor antenna applications used by private organizations and government agencies around the globe.
- Typical applications include land based and marine radio and data transmissions for public safety agencies, commercial organizations, and the military.

Electrical	
Frequency Range	2400 – 2500 MHz
VSWR	< 2:1 Max
Nominal Gain	5 dBi
Maximum Power	100 W
Nominal Impedance	50 Ω
Polarization	Vertical
Pattern	Omnidirectional
Half-Power Beamwidth (Elevation° x Azimuth°)	110° x 360°
Coaxial Cable Length & Type	None
Termination	N Female connector
Lightning Protection	Lightning Arrestor LABH350NN (Sold separately)

Mechanical	
Height	13-3/4"
Diameter	1.310"
Weight	< 0.5 lbs
Rated Wind Velocity	125 mph (210 kph)
Rated Wind Velocity (with 0.5" radial ice)	85 mph (137 kph)
Lateral Thrust @ 125mph wind velocity	57 lbs. (26 kg)
Wind Resistance	0.1251 sq. ft.
Mounting Information	Optional FM2SP Mounting Kit (Sold separately)

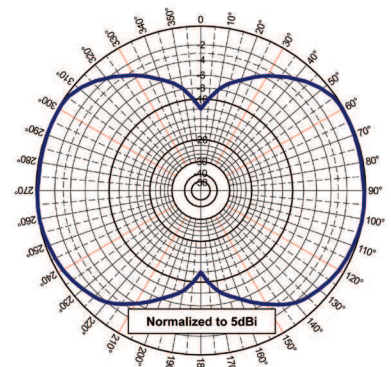

Elevation Pattern (Y, Z, or H-plane)

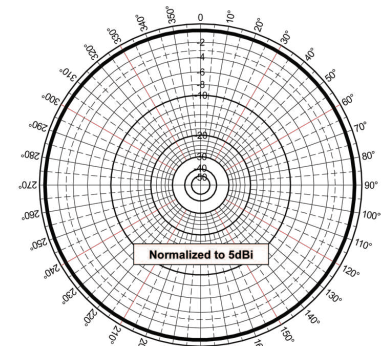

Azimuthal Pattern (Y, Z, or E-plane)

global solutions: local support™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-FG24005 0610

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2010 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.