



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





product
design
award

2006

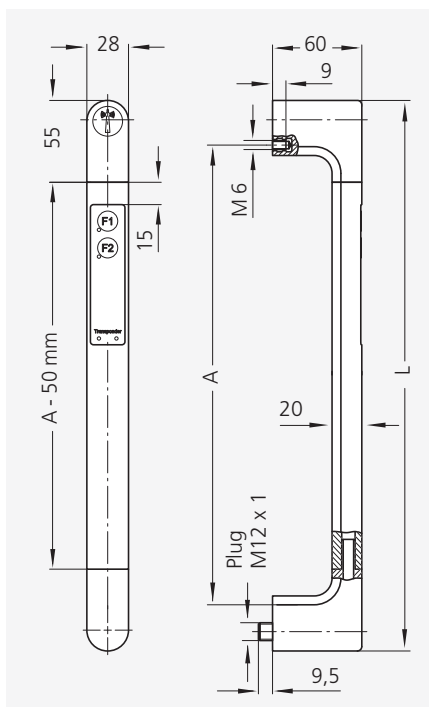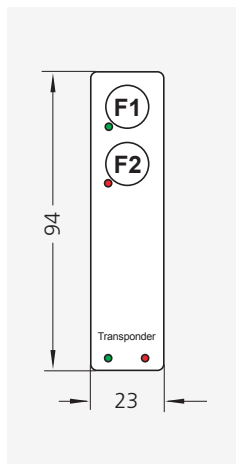

Handle

A*	L	Order no.
350	410	FG4-T2.350.11

* Other handle lengths on request

Transponder version

Transponder version	Order no.
Blank card	FZ-TP.001
Key fob	FZ-TP.002
Watch dummy	FZ-TP.003

Handle accessories



10 m cable welded to coupling 12-pole (M12 x 1)	Order no.
	FZ-KS.W12.10

Technical data

Button F1	GY/PK(11) BU(2) LED green GY(8) BN(1)
Button F2	VT(10) GN(4) LED red GY(8) WH(3)
Transponder Relais	PK(5) YE(6) K1 BK(7)
Operational voltage Transponder LED	12/24 V DC 24 V DC
Switching voltage	min. 100 mV AC/DC • max. 25 V AC / 42 V DC
Switching current	max. 100 mA
Switching power	max. 0,6 W
Connection type	12-pole, M12 x 1

All dimensions in mm.

Transponder handle FG4-T

Versions:

Keypad with 2 optional push buttons and 2 LEDs. Button labelling as standard with F1 to F2 or on customers request.

Integrated transponder reader in upper handle shank with a range of approx. 15 cm. Transponder in 3 different versions.


Connection:

12-pole, coupling with 10 m ready made cable available as accessory .

Note:

Further handle lengths, other transponder versions and labelling on request.

Types of transponder



FZ-TP.001*



FZ-TP.002*



FZ-TP.003*

*) labelling on customers request