



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





### OMNIDIRECTIONAL ANTENNAS 824-896 MHz FG8243

Laird’s fiberglass base station antennas are collinear designs enclosed in a high-density fiberglass which is covered with a protective ultraviolet inhibiting coating.

The radiating elements are made from high-efficiency copper and are carefully phased to provide maximum gain in the horizontal plane. The mounting sleeves are tuned to eliminate RF currents from the transmission line, resulting in a cold sleeve allowing great freedom in mounting. This high quality and well-focused beam provides the highest gain and best efficiency.

### FEATURES

- Highly stable PC board matching section
- Superior quality design
- Highest gain and best matching efficiency in the industry
- Special UV treated radome / resists sun damage
- N-female industry standard connector
- 100% tested on a Network Analyzer

ELECTRICAL SPECIFICATIONS	
Frequency Range	824-896 MHz
VSWR	<2:1
Peak Gain	4.5 dBi
Maximum Power	100 W
Nominal Impedance	50 Ω
Polarization	Vertical
Pattern	Omnidirectional
Half-Power Beamwidth (Elevation° x Azimuth°)	60 x 360°
Coaxial Cable Length & Type	None
Termination	N-female Connector
Lightning Protection	Lightning Arrestor LABH350NN (Sold Separately)

MECHANICAL SPECIFICATIONS	
Height	23-1/8"
Diameter	1.310"
Weight	1.5 lbs
Operating Temperature	-40°C to +85°C
Rated Wind Velocity	125 mph (210 kph)
Rated Wind Velocity (with 0.5" radial ice)	85 mph (137 kph)
Lateral Thrust @ 12mph Wind Velocity	57 lbs (26 kg)
Wind Resistance	0.2161 sq. ft.
Mounting Information	FM2 Mounting Kit (Sold Separately)




Lightning Arrestor  
LABH350NN  
(Sold Separately)




FM2 Mounting Kit (Sold separately)

### RADIATION PATTERNS

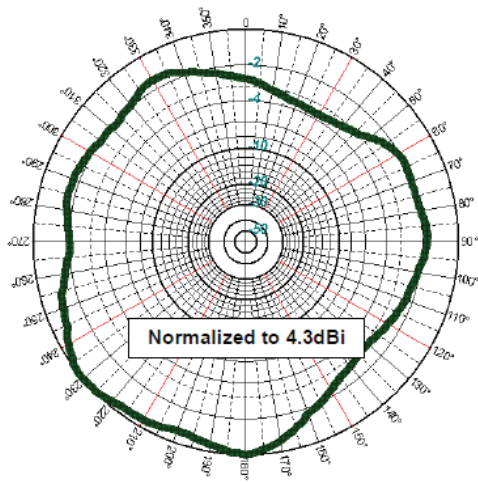

**Azimuth Pattern**

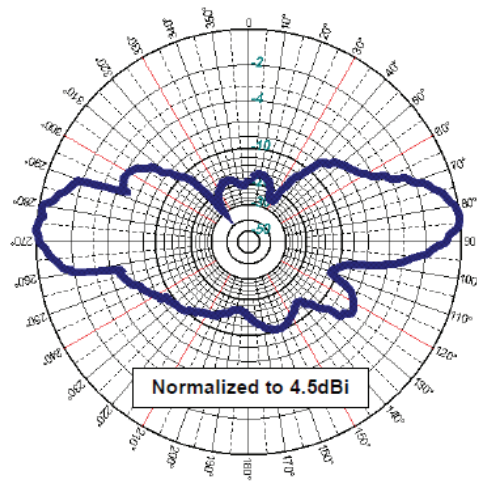

**Elevation Pattern**