



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- UL Recognized: VW-1
- Rated To 464°F
- For High Temp - Low Voltage Applications
- Easy To Install-Cuts With Scissors
- Resists Most Organic Solvents
- Cut And Abrasion Resistant

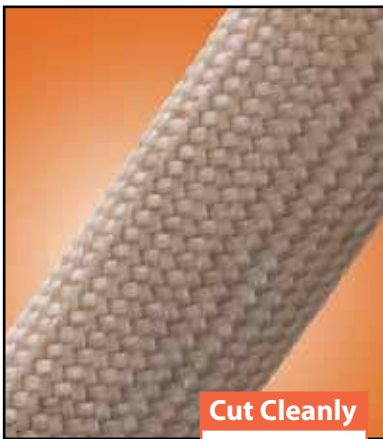

**Cut Cleanly
Scissors**

Material
Acrylic Coated Fiberglass

Grade
FGL

Wall Thickness
Refer to Chart

Drawing Number
TF001INS-WD

Put-Ups


Nominal Size	Diameter	Part #	Wall Thickness	Expansion Range		Bulk Spool	Shop Spool	Available Colors
				Min.	Max.			
24	0.022"	FGLG.24	0.006"	0.020"	0.027"	500'	250'	6
22	0.027"	FGLG.22	0.006"	0.025"	0.032"	500'	250'	6
20	0.034"	FGLG.20	0.006"	0.032"	0.039"	500'	250'	6
18	0.042"	FGLG.18	0.006"	0.040"	0.049"	500'	250'	6
16	0.053"	FGLG.16	0.006"	0.051"	0.061"	500'	250'	6
14	0.066"	FGLG.14	0.006"	0.064"	0.072"	500'	250'	6
12	0.085"	FGLG.12	0.006"	0.081"	0.089"	250'	100'	6
11	0.095"	FGLG.11	0.008"	0.091"	0.101"	250'	100'	6
10	0.106"	FGLG.10	0.008"	0.102"	0.112"	250'	100'	6
9	0.118"	FGLG.09	0.008"	0.114"	0.124"	250'	100'	6
8	0.133"	FGLG.08	0.008"	0.129"	0.141"	250'	100'	6
7	0.148"	FGLG.07	0.008"	0.144"	0.158"	250'	100'	6
6	0.166"	FGLG.06	0.010"	0.162"	0.178"	250'	100'	6
5	0.186"	FGLG.05	0.010"	0.182"	0.198"	250'	100'	6
4	0.208"	FGLG.04	0.010"	0.204"	0.224"	250'	100'	6
3	0.234"	FGLG.03	0.010"	0.229"	0.249"	250'	100'	6
2	0.263"	FGLG.02	0.010"	0.258"	0.278"	250'	100'	6
1	0.294"	FGLG.01	0.010"	0.289"	0.311"	100'	50'	6
0	0.330"	FGLG.00	0.010"	0.325"	0.347"	100'	50'	6
3/8"	0.375"	FGL0.38	0.010"	0.375"	0.399"	100'	50'	6
7/16"	0.438"	FGL0.44	0.010"	0.438"	0.462"	100'	50'	6
1/2"	0.500"	FGL0.50	0.010"	0.500"	0.524"	100'	50'	6
5/8"	0.625"	FGL0.63	0.010"	0.625"	0.655"	100'	50'	6
3/4"	0.750"	FGL0.75	0.010"	0.750"	0.786"	100'	50'	6
1"	1.000"	FGL1.00	0.010"	1.000"	1.040"	100'	50'	6

**Heat Treated, Fray-Resistant
Fiberglass Sleeving**

Techflex INSULTHERM TRU-FIT (FGL) is a braided fiberglass sleeving which has been heat treated and impregnated with an acrylic binder to reduce fraying and dusting, and improve usability and performance. FGL is engineered for applications where temperatures as high as 1,200°F may be encountered. FGL is used as primary insulation on low voltage applications such as leads in toasters, coffee makers, ranges and other appliances. FGL may also be used as insulation and protection for small heaters and resistors that operate at high temperatures, and to insulate over soldered connections when exposure to solder melt temperatures is possible.

Insultherm Tru-Fit provides a sturdy, long lasting and inexpensive insulation solution. It is flexible and expandable, and can easily be installed over applications with irregular shapes and tight turns. Standard color are Black and Natural, but other colors are available by special order. Contact your Account representative for details.


Colors Available:
6 = WH, NT, YL
RD, BL, BK

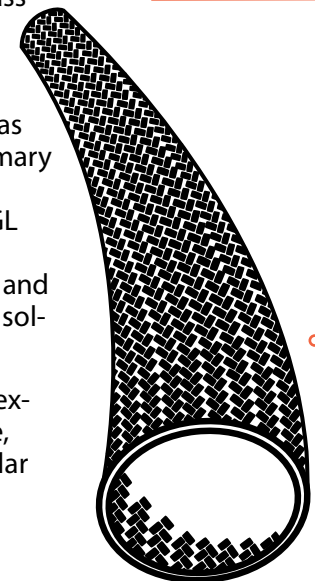

Colors Available:



White (WH), Natural (NT), Yellow (YL), Red (RD), Blue (BL), Black (BK).

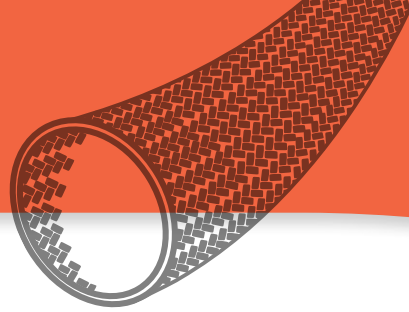

ABRASION  **FLAMMABILITY**

Abrasion Resistance
Medium

Rating _____ UL VW-1

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

 **CHEMICAL
RESISTANCE**


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	2
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
2,048°F (1,120°C)

Maximum Continuous
Mil-I-23053
1,202°F (650°C)

Minimum Continuous
-94°F (-70°C)

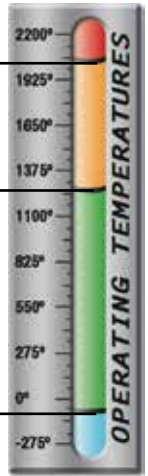

 **PHYSICAL
PROPERTIES**

Monofilament Diameter _____	NA
ASTM D-204	
Flammability Rating _____	VW-1
FMVSS-302 Approved	
Recommended Cutting _____	Scissor
Colors _____	6
Wall Thickness _____	.006-.016
Specific Gravity ASTM D-792 _____	1.0-1.8
Moisture Absorption _____	.01
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595	
TML _____	.02
CVCM _____	.01
WVR _____	.00
Outgassing _____	Low