



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- UL Recognized
- Resin Coated, Heavy Weight
Fiberglass Won't Burn, Melt
Or Become Brittle
- Easy To Install-Cuts With
Scissors
- Resists Gasoline And
Engine Chemicals
- Cut And Abrasion Resistant

Put-Ups

Nominal Size	Part #	Maximum Diameter	Wall Thickness	Bulk Spool	Shop Spool	Available Colors	Lbs/100'
1/4"	FGN0.25	3/8"	0.031"	200'	50'	2	2.00
3/8"	FGN0.38	5/8"	0.043"	200'	50'	2	3.30
1/2"	FGN0.50	3/4"	0.046"	200'	50'	2	4.80
5/8"	FGN0.63	7/8"	0.046"	200'	50'	2	5.30
3/4"	FGN0.75	1 1/8"	0.046"	200'	50'	2	6.40
7/8"	FGN0.88	1 1/4"	0.046"	200'	50'	2	8.70
1"	FGN1.00	1 5/8"	0.057"	100'	25'	2	10.50
1 1/2"	FGN1.50	2 5/8"	0.061"	100'	25'	2	16.00
2 1/2"	FGN2.50	4 1/8"	0.071"	100'	25'	2	19.70

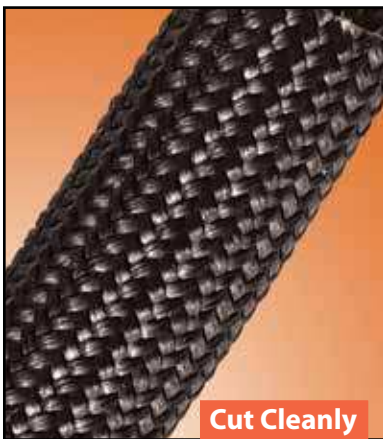

Cut Cleanly
Scissors

Material
Resin Coated Fiberglass

Grade
FGN

Wall Thickness
Refer to Chart

Drawing Number
TF001INS-WD

**Resin Coated Fiberglass
Protects To 1,200°F**

INSULTHERM (FG) is an extremely high temperature resistant sleeve commonly used as thermal protection for wires, cables and hoses that are subjected to continuous and extreme high temperature environments, such as engine manifolds and exhaust systems.

FG is braided from fiberglass yarns and coated with high temperature resins. FG is tough and durable, maintaining its tight structure under extreme vibration, abrasion, mechanical stress and temperature variations.

FG installs easily over a variety of applications to either deflect or retain heat in environments up to 1,200° F.

**"...will withstand extreme heat...
provides the protection needed"**


*Peter Mercier - Engineer Team Bucknum Racing
www.bucknum.com*


Colors Available:



Black (BK) and Silver (SV).

Colors Available:
2 = BK and SV

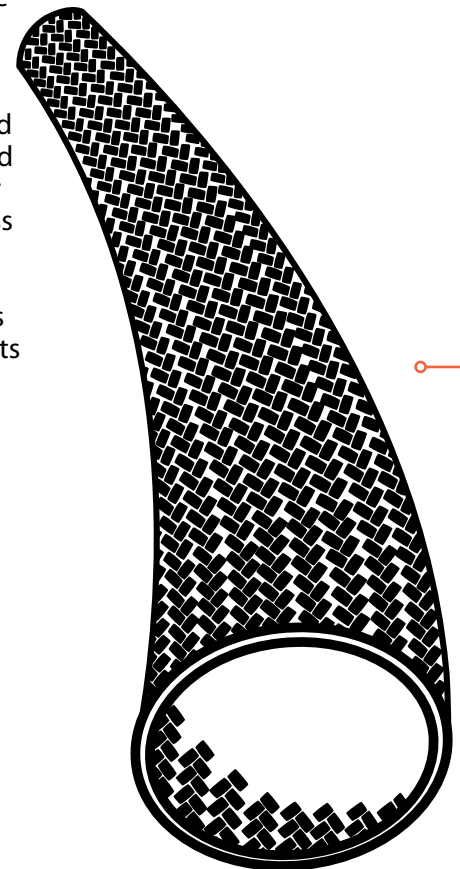

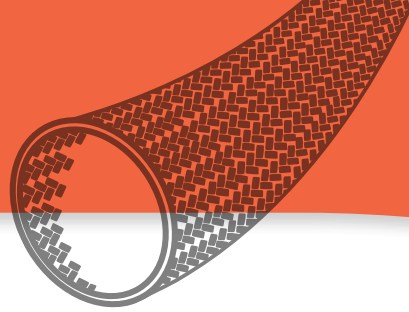

ABRASION **FLAMMABILITY**

Abrasion Resistance Rating _____ **VW-1**
High

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
73°F

Humidity
55%

Visible Minor Scuffing
200 Test Cycles

Scuffing And Wear
Continues
300 Test Cycles

Scuffing And Wear
Continues
500 Test Cycles

Several Broken Strands
1,300 Test Cycles

Material Destroyed
1,650 Test Cycles

Pre-Test Weight
19,411.6 mg

Post-Test Weight
17,154.5 mg

Test End Loss Of Mass
Point Of Destruction
2,257.1 mg

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____ 1
Aliphatic Solvents _____ 1
Chlorinated Solvents _____ 1
Weak Bases _____ 1
Salts _____ 1
Strong Bases _____ 1
Salt Water 0-S-1926 _____ 1
Hydraulic Fluid MIL-H-5606 _____ 1
Lube Oil MIL-L-7808 _____ 1
De-Icing Fluid MIL-A-8243 _____ 1
Strong Acids _____ 2
Strong Oxidants _____ 2
Esters/Ketones _____ 1
UV Light _____ 2
Petroleum _____ 1
Fungus ASTM G-21 _____ 1
Halogen Free _____ Yes
RoHS _____ Yes
SVHC _____ None

Melt Point
ASTM D-2117
2,048°F (1,120°C)

Maximum Continuous
Mil-I-23053
1,202°F (650°C)

Minimum Continuous
-94°F (-70°C)

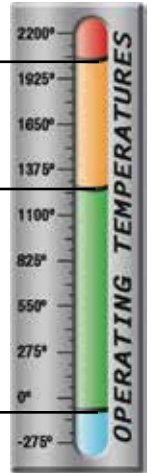

PHYSICAL PROPERTIES

Monofilament Diameter _____ NA
ASTM D-204
Flammability Rating _____ VW-1
Recommended Cutting _____ Scissor
Colors _____ 2
Wall Thickness _____ .031-.061
Specific Gravity *ASTM D-792* _____ 1.0-1.8
Moisture Absorption _____ .01
% ASTM D-570
Hard Vacuum Data _____
ASTM E-595
TML _____ .02
CVCM _____ .01
WVR _____ .00
Outgassing _____ Low