



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- **UL Recognized**
- **Continuous Filament E-Type Glass**
- **Resists Abrasion, Vibration, And Mechanical Stress**
- **Easy To Install - Cuts With Scissors**
- **Stays Flexible In Low Temps**

Nominal Size	Part #	Wall Thickness	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/100'
			Min.	Max.				
1/2"	FHH0.50NT	0.025"	3/8"	5/8"	100'	50'	Natural	3.50
3/4"	FHH0.75NT	0.040"	5/8"	1 5/32"	100'	50'	Natural	8.00
1"	FHH1.00NT	0.032"	7/8"	1 3/8"	50'	25'	Natural	7.00
1 1/4"	FHH1.25NT	0.035"	1"	1 3/4"	50'	25'	Natural	10.50
1 1/2"	FHH1.50NT	0.035"	1 1/8"	2 1/8"	50'	25'	Natural	10.00

Put-Ups



**Expands Up To 50%
For Easy Installation**

Material

Fiberglass

Grade

FHH

Wall Thickness


Refer to Chart

**Heavy Wall Fiberglass
Protects To 1,200°F**


The heavy wall (1/32") construction, large available diameters and high expandability of Ultraflex Pro provides a high level of protection and ease of installation when used to insulate pipes and hoses subject to abrasion and vibration.

Ultraflex Pro cuts easily with scissors, and special heat treated construction minimizes fraying and dusting during assembly.

■ **Colors Available:**
Natural (NT)

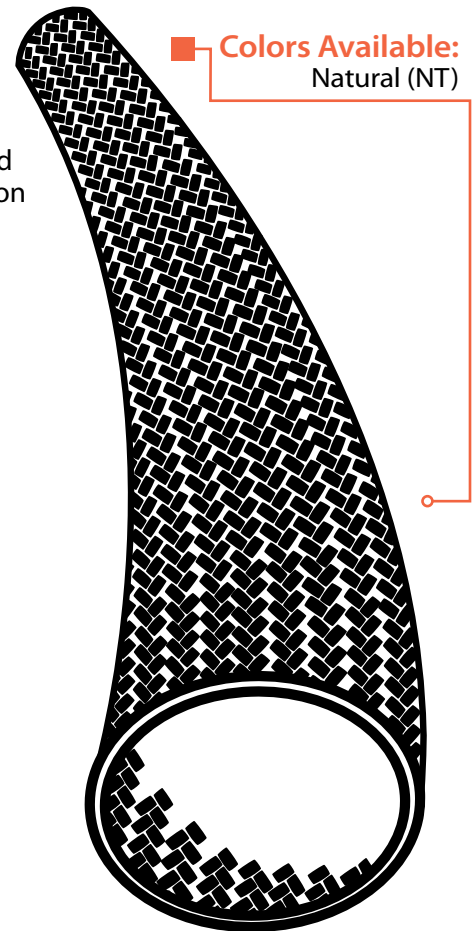

■ **"...will withstand extreme heat...
provides the protection needed"**

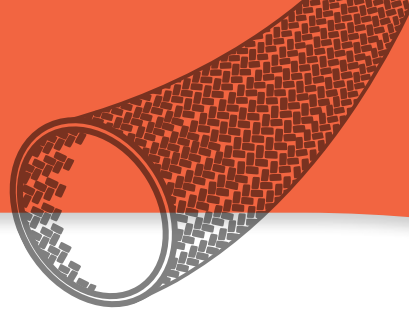

ABRASION **FLAMMABILITY**

Abrasion Resistance Rating _____ VW-1
Medium

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
75°F

Humidity
72%

Individual Fibers Visibly Broken
150 Test Cycles

Braid Worn Through In One Direction
500 Test Cycles

Material Destroyed
525 Test Cycles

Pre-Test Weight
***20,831.10 mg**

Post-Test Weight
***19,203.20 mg**

Test End Loss Of Mass Point Of Destruction
1,140.51 mg

***Weight Includes Mounting Card**

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	2
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	None

Melt Point
ASTM D-2117
2,048°F (1,120°C)

Maximum Continuous
Mil-I-23053
1,202°F (650°C)

Minimum Continuous
-94°F (-70°C)

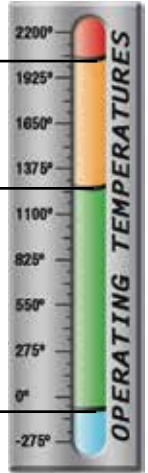

PHYSICAL PROPERTIES

Monofilament Diameter _____	NA
ASTM D-204	
Flammability Rating _____	VW-1
Recommended Cutting _____	Scissor
Colors _____	1
Wall Thickness _____	.025-.035
Tensile Strength (Yarn) _____	
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1.0-1.8
Moisture Absorption _____	.01
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	.01
CVCM _____	.00
WVR _____	.00
Smoke D-Max _____	
ASTM E-662	
Outgassing _____	Low
Oxygen Index _____	
ASTM D-2863	

www.techflex.com