



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# NetKey® Fiber Optic Connectors – Pot and Polish Termination

**PANDUIT®**  
DATA SHEET

Pot and polish fiber optic connectors meet TIA/EIA 568-B.3 requirements, are TIA/EIA-604 FOCIS-3 (SC and ST) and TIA/EIA-604 FOCIS-10 (LC) compliant and are field terminable. The fibers terminate in ceramic ferrules with non-optical disconnect functionality. Anaerobic adhesive is recommended for termination.

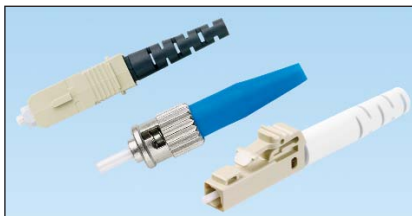

## technical information

	<b>SC Connector – Pot and Polish</b>	<b>ST Connector – Pot and Polish</b>	<b>LC Connector – Pot and Polish</b>
<b>Standards requirements:</b>	TIA/EIA-604 FOCIS-3 compliant Exceeds TIA/EIA-568-B.3 requirements	TIA/EIA-604 FOCIS-2 compliant	TIA/EIA-604 FOCIS-10 compliant
<b>Fiber compatibility:</b>	62.5/125µm OM1, 50/125µm OM2, 10Gig™ 50/125µm laser optimized OM3/OM4 and 9/125µm OS1/OS2		
<b>Jacketed cable size:</b>	3.0mm jacketed cable or 900µm buffered fiber		1.6mm-2.0mm jacketed cable or 900µm buffered fiber
<b>Insertion loss:</b>	.1dB average (multimode), .15dB (singlemode)	.15dB typical (multimode), 0.20dB typical (singlemode)	.1dB average (multimode and singlemode)
<b>Return loss:</b>	>20dB (multimode), >40dB (singlemode)		

## key features and benefits

	<b>SC Connector – Pot and Polish</b>	<b>ST Connector – Pot and Polish</b>	<b>LC Connector – Pot and Polish</b>
<b>Ceramic ferrule</b>	Provides the highest durability for repeated matings		
<b>Non-optical disconnect</b>	Maintains data transmission under tensile loads (SC and LC versions only)		
<b>Robust design</b>	Enhances network reliability; exceeds requirements of TIA/EIA-568-B.3		

## applications

- Telecommunication rooms, LANs, public networks and fiber-to-the-desk applications
- Equipment cross-connects or interconnects in backbone, horizontal and work area applications for high speed data transmissions
- Multimode connectors provide easy to terminate and low cost fiber-to-the-desk applications
- Singlemode connectors provide added bandwidth capacity for complete data transmissions

### NetKey® SC Pot and Polish Connectors with Zirconia Ceramic Ferrule

62.5/125µm mm simplex – white boot:	NKFSCMWH
50/125µm mm simplex – black boot:	NKFSCMBL
50/125µm OM3/OM4 mm simplex – aqua boot:	NKFSCMAQ
Singlemode simplex – white boot:	NKFSCSWH

### NetKey® ST Pot and Polish Connectors with Zirconia Ceramic Ferrule

62.5/125µm or 50/125µm mm – black boot:	NKFSTMABL
62.5/125µm or 50/125µm mm – red boot:	NKFSTMARD
Singlemode with blue boot:	NKFSTSABU

### NetKey® LC Pot and Polish Connectors with Zirconia Ceramic Ferrule

62.5/125µm mm simplex – white boot:	NKFLCSMWH
50/125µm mm simplex – black boot:	NKFLCSMBL
50/125µm OM3/OM4 mm simplex – aqua boot:	NKFLCSMAQ
Singlemode simplex – white boot:	NKFLCSSWH

### Termination Tooling

110 V termination kit:	FIELDKIT
230 V termination kit:	FIELDKIT-G
Refurbishment kit:	FIELDKITRFB

### Singlemode Connectors Also Require

1µm diamond film:	FPF1-V
Polishing cloth:	FPCL-Q
Polishing slurry:	FPSL

### SC Duplex Clip


SC duplex clip:	NKFSCCLIP
-----------------	-----------

### LC Lock-In Duplex Clip


LC lock-in duplex clip:	FLCCLIW-X
LC duplex clip:	NKFLCCLIP

# NetKey® Fiber Optic Connectors – Pot and Polish Termination


## SC Connectors

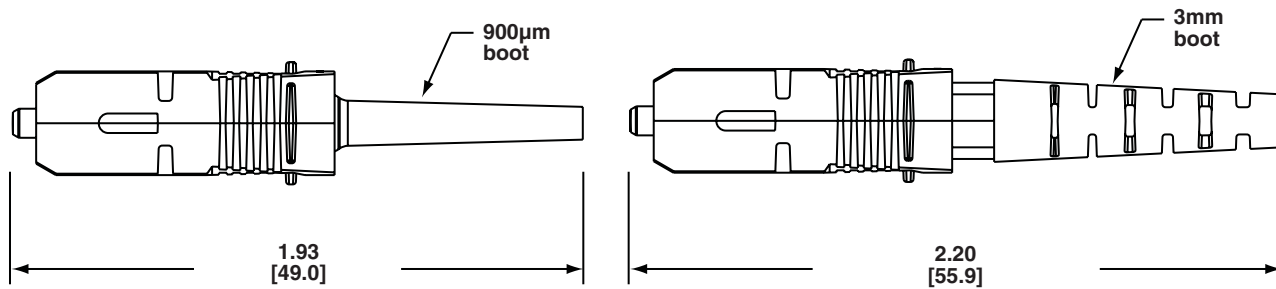

## ST Connectors

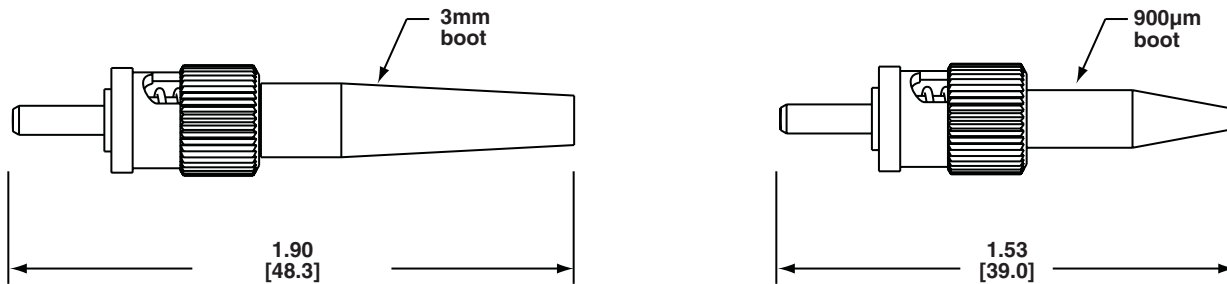

## LC Connectors

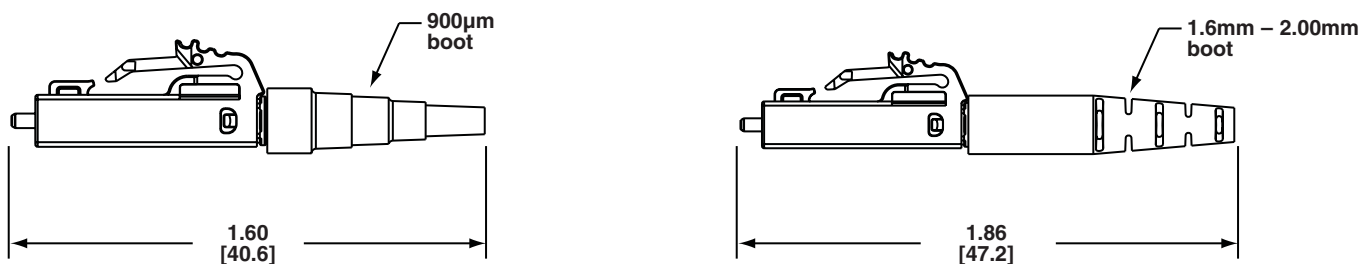

Dimensions are in inches. [Dimensions in brackets are metric].

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Jalisco, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800-777-3300 and reference NKDS18

**PANDUIT®**

©2010 Panduit Corp.  
ALL RIGHTS RESERVED.

WW-NKDS18

2/2010