



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




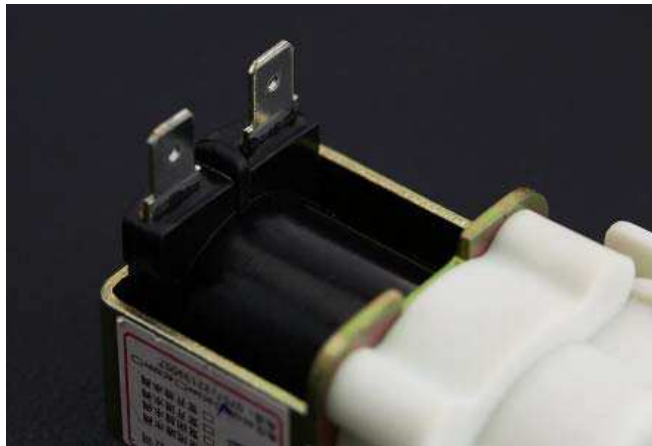

12V Solenoid Valve - DN20

SKU:FIT0498

This is a 12V normally closed solenoid valve with no polarity distinction. It is normally closed until powered on. You can implement real-time water flow control with our water flow sensor. It can be widely used in automatic agriculture, fisheries and other projects that require water flow control. The direction of value terminals can be adjusted according to demand. The unit has stable performance, reliable quality, high sensitivity and other advantages. The product has a protection index of IP00 and can withstand 2.0 Mpa static pressure. A high quality stainless steel spring and material give it a lifetime of no less than 200000 cycles (If used 100 times per day, this will allow for more than five years of life).

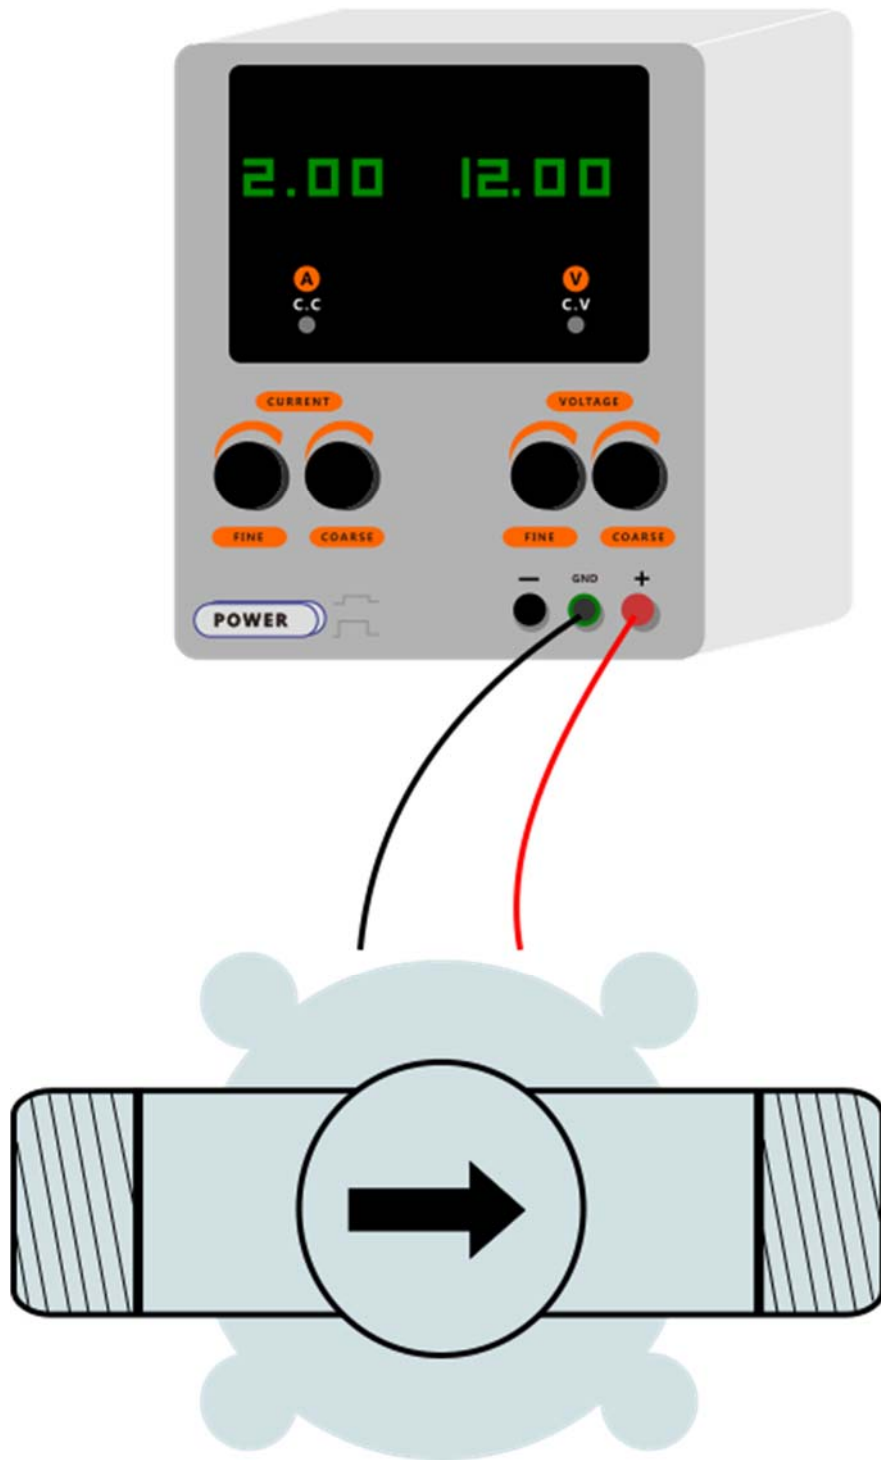

Water flow sensor

SPECIFICATION

- Rated Voltage: 12V
- Rated Current: 0.42 A
- Working Pressure: 0.02 ~ 0.8 MPa
- Withstand Static Pressure: 2.0 MPa
- Service Life: 200000 times
- Liquid Temperature: 0 ~ 60 °C
- Relative Humidity: 95%
- Protection Grade: IP00
- Size: 70 * 57 * 45 mm/2.95 * 2.24 * 1.77 inches
- Weight: 116 g

SHIPPING LIST

- 12V Solenoid Valve - DN20