

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



May 2007

High Voltage Switch Mode Application

- · High Speed Switching
- · Suitable for Electronic Ballast and Switching Regulator



Absolute Maximum Ratings * Ta = 25°C unless otherwise noted

Symbol	Parameter	Value	Units
V _{CBO}	Collector-Base Voltage	700	V
V _{CEO}	Collector-Emitter Voltage	400	V
V_{EBO}	Emitter-Base Voltage	9	V
I _C	Collector Current (DC)	4	Α
I _{CP}	Collector Current (Pulse)	8	A
I _B	Base Current	2	Α
P _C	Collector Dissipation (T _a = 25°C)	30	W
TJ	Junction Temperature	150	°C
T _{STG}	Storage Temperature	-65 ~ 150	°C

^{*} These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

Electrical Characteristics * T_C = 25°C unless otherwise noted

Symbol	Parameter	Conditions	Min.	Тур.	Max	Units
BV _{CBO}	Collector-Base Breakdwon Voltage	$I_C = 500 \mu A, I_E = 0$	700			V
BV _{CEO}	Collector-Emitter Breakdown Voltage	$I_{C} = 5mA, I_{B} = 0$	400			V
BV _{EBO}	Emitter-Base Breakdown Voltage	$I_E = 500 \mu A, I_C = 0$	9			V
I _{CBO}	Collector Cut-off Current	$V_{CB} = 700V, I_{E} = 0$			1	μА
I _{EBO}	Emitter Cut-off Current	V _{EB} = 9V, I _C = 0			1	μА
h _{FE1}	DC Current Gain *	V _{CE} = 5V, I _C = 1A V _{CE} = 5V, I _C = 2A	19 8		35 40	
V _{CE(sat)}	Collector-Emitter Saturation Voltage	$I_C = 1A$, $I_B = 0.2A$ $I_C = 2A$, $I_B = 0.5A$ $I_C = 4A$, $I_B = 1A$			0.5 0.6 1.0	V V V
V _{BE(sat)}	Base-Emitter Saturation Voltage	$I_C = 1A$, $I_B = 0.2A$ $I_C = 2A$, $I_B = 0.5A$			1.2 1.6	V V
f _T	Current Gain Bandwidth Product	$V_{CE} = 5V, I_{C} = 1A$	4			MHz
C _{ob}	Output Capacitance	V _{CB} = 10V, f = 1MHz		65		pF
t _{ON}	Turn On Time	V _{CC} = 125V			0.8	μS
t _{STG}	Storge Time	$I_C = 2A = 5I_{B1} = -5I_{B2}$ $R_1 = 62.5\Omega$			4.0	μS
t _F	Fall Time	711 - 02.052			0.9	μS

^{*} Pulse Test: PW $\leq 300 \mu s, \, \text{Duty Cycle} \leq 2\%$

h_{FE} Classification

Classification	H1	H2
h _{FE2}	19 ~ 28	26 ~ 35

Typical Performance Characteristics

Figure 1. Static Characteristic




Figure 2. DC Current Gain (R-Grade)




Figure 3. DC Current Gain (O-Grade)




Figure 4. Saturation Voltage (R-Grade)




Figure 5. Saturatin Voltage (O-Grade)





Figure 6. Saturation Voltage (R-Grade)



3

Typical Performance Characteristics (Continued)

Figure 7. Saturation Voltage (O-Grade)




Figure 8. Switching Time





Figure 9. Reverse Biased Safe Operating Area

Figure 10. Forward Biased Safe Operating Area








Figure 11. Power Derating



4

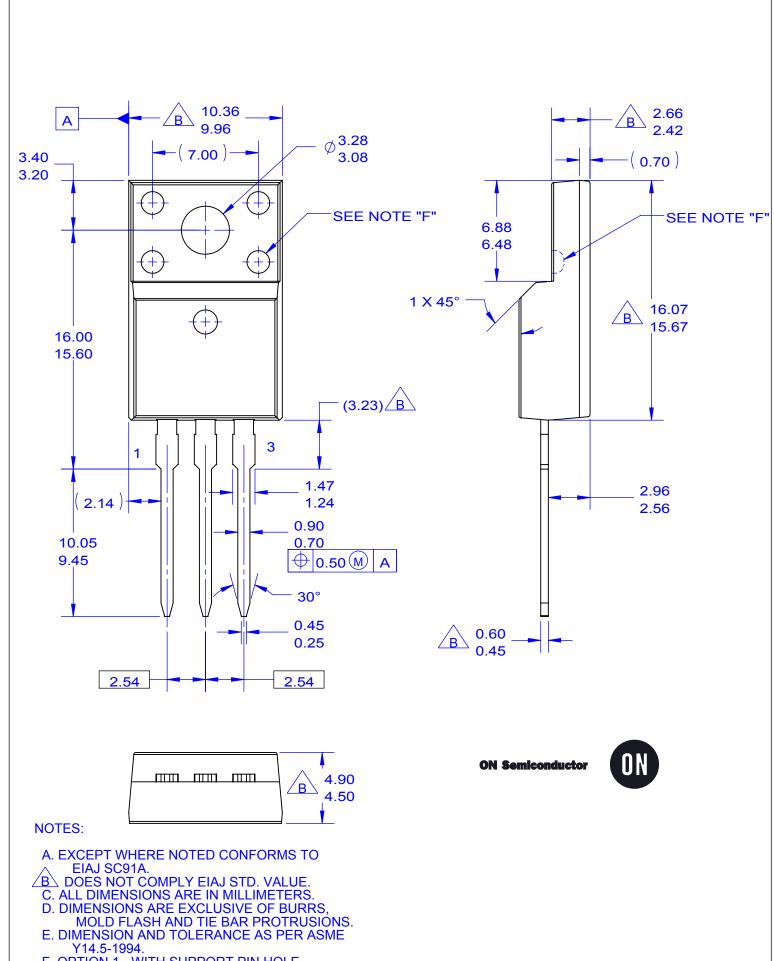

- F. OPTION 1 WITH SUPPORT PIN HOLE. OPTION 2 NO SUPPORT PIN HOLE.
- G. DRAWING FILE NAME: TO220M03REV5

ON Semiconductor and III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center

Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative