



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



KEMET, FLLD3-MH, EMI Filters, Three Phase, 530 VAC, 180 A, 350x120x170mm

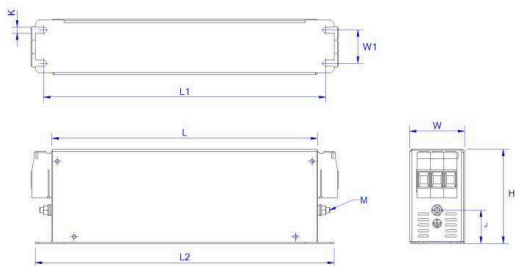

**Dimensions**

<b>L</b>	350mm NOM
<b>W</b>	120mm NOM
<b>H</b>	170mm NOM
<b>L1</b>	365mm NOM
<b>L2</b>	380mm NOM
<b>W1</b>	102mm NOM
<b>J</b>	47mm NOM
<b>K</b>	6.5mm NOM
<b>M (Earth)</b>	Threaded Studs M10

**Packaging Specifications**

<b>Packaging:</b>	Bulk
<b>Packaging Quantity:</b>	1
<b>Weight:</b>	5.1 kg

**General Information**

<b>Series:</b>	FLLD3-MH
<b>Style:</b>	Chassis Mount
<b>Description:</b>	EMI Filter, Chassis Mount, Motor Drives
<b>Features:</b>	High Performance
<b>RoHS:</b>	Yes
<b>Qualifications:</b>	IEC/EN 60939, UL 1283

**Specifications**

<b>Voltage AC:</b>	530/305 VAC
<b>Rated Frequency:</b>	50-60 Hz
<b>Ripple Current:</b>	180 A (50C)
<b>Rated Temperature:</b>	50C
<b>Temperature Range:</b>	-25/+100C
<b>Climate Category:</b>	25/100/21
<b>Test Voltage DC (P to P):</b>	2250 VDC
<b>Test Voltage DC (P to E):</b>	3000 VDC
<b>Power Loss:</b>	45 W (25C 50 Hz)
<b>Leakage Current:</b>	4.7 mA