



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# KEMET Part Number: FLLD4064ATHT5



KEMET, FLLD4-TH, EMI Filters, Three Phase, 530 VAC, 64 A, 160x125x125mm

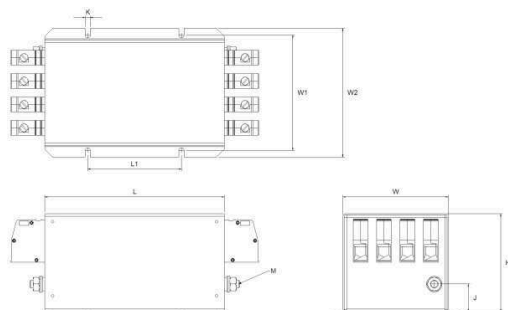

Dimensions	
L	160mm NOM
W	125mm NOM
H	125mm NOM
L1	100mm NOM
W1	137.5mm NOM
W2	153mm NOM
J	35mm NOM
K	6.5mm NOM
M (Earth)	Threaded Studs M10

Packaging Specifications	
Packaging:	Bulk
Packaging Quantity:	1
Weight:	2.3 kg

General Information	
Series:	FLLD4-TH
Style:	Chassis Mount
Description:	EMI Filter, Classis Mount, Compact
Features:	High Performance
RoHS:	Yes
Qualifications:	IEC/EN 60939, UL 1283

Specifications	
Voltage AC:	530/305 VAC
Rated Frequency:	50-60 Hz
Ripple Current:	64 A (50C)
Rated Temperature:	50C
Temperature Range:	-25/+100C
Climate Category:	25/100/21
Test Voltage DC (P to P):	2250 VDC
Test Voltage DC (P to E):	3000 VDC
Power Loss:	18 W (25C 50 Hz)
Leakage Current:	11 mA

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.



© 2006 - 2018 IntelliData.net