

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










ITEM	Q'TY	PART NUMBER	PART DESCRIPTION
1	1	FLPV2-XX	Flexible Light Pipe 2mm Adapter, Vertical w/ LED, See page 2
2	1	FLPF-XX.X	Light Pipe Lens Cap Assembly, 2mm Flat Face

REV.	DESCRIPTION	DATE	APPROVED
Α	Engineering Release	09/14/09	T. Y.
В	Replaced 3UWC-0.6K-F with 3UWC1.035C-F	04/26/12	T. Y.
С	Updated Table For Length "L"	11/16/12	T. Y.

NOTE: FLPV2-XX ADAPTER SHIPPED NON-ASSEMBLED

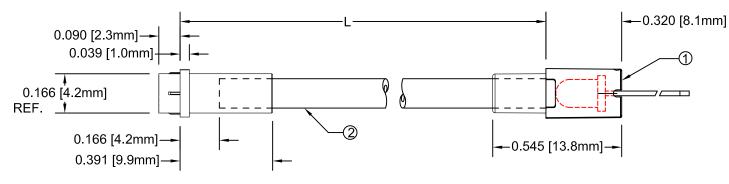






Recommended Mounting Holes

Ø 169^{+ 003}

" L "*	Tolerance
1.0" ~ 16.0"	±0.050"
16.1" ~ 40.0"	±0.15"
40.1" ~ 80.0"	±0.30"
80.1" ~ 3,940.0"	±0.5%

* Available in 0.1" increments only



SINGLE COLOR LED SHORT LEAD CATHODE
SHORT LEAD CATHODE



BI-COLOR LED'S

SHORT	LED	LONG
LEAD	PART NO.	LEAD
CATHODE	PARTNO.	CATHODE
RED	3xBCC-F	GREEN
YELLOW	3xBCC-Y/G-F	GREEN
RED	3xBCC-R/Y-F	YELLOW
AMBER	3xBCC-A/G-F	GREEN

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

 REVERSE VOLTAGE
 5V

 REVERSE CURRENT
 100uA

 OPERATING TEMPERATURE RANGE
 -25° C - 85° C

 STORAGE TEMPERATURE
 -30° C - 100° C

 LEAD SOLDERING TEMPERATURE(1/16" FROM BODY)
 260° C FOR 5 SECONDS

STANDARD TOL (UNLESS OTHERWIS			AR	®
DECIMALS .X ± .1 .XX ± .02	ANGULAR X° ± 1°	4 THOMAS, IRVI TEL: (949) 951-8808		
.XXX ± .010	$\oplus \Box$	TITLE: FLEXIBLE L FLAT	IGHT PIPE FACE, VEI	
DESIGNED: Brian Oliver	DATE: 09/14/09	PART NO: FLP2FVX.)	X-XXX	REVISION:
CHECKED: Fred Jensen	09/14/09	CAGE CODE: 32559	SHEET# 1	OF 2
i ieu sensen	03/14/03	CAD GENERATED DOCUMENT, D	O NOT MEASURE	DRAWING.


REV.	DESCRIPTION	DATE	APPROVED
	SEE SHEET#1		


SINGLE COLOR ASSEMBLIES

Assembly Part No.	Emitted Color	LED Part No.
FLP2FVX.X-SA	AMBER	3SAC-F
FLP2FVX.X-UBW	BLUE	3UBWC-0.6K-F
FLP2FVX.X-SG	GREEN	3SGC-F
FLP2FVX.X-UG	GREEN	3UGC-F
FLP2FVX.X-SUG	GREEN	3SUGC-F
FLP2FVX.X-UO	ORANGE	3UOC-F
FLP2FVX.X-SUO	ORANGE	3SUOC-F
FLP2FVX.X-SR	RED	3SRC-F
FLP2FVX.X-UR	RED	3URC-F
FLP2FVX.X-SUR	RED	3SURC-F
FLP2FVX.X-UT	TURQUOISE	3UTC-F
FLP2FVX.X-SY	YELLOW	3SYC-F
FLP2FVX.X-UY	YELLOW	3UYC-F
FLP2FVX.X-SUY	YELLOW	3SUYC-F
FLP2FVX.X-UUY	YELLOW	3UUYC-F
FLP2FVX.X-UW	WHITE	3UWC-0.6K-F

BI-COLOR ASSEMBLIES

Assembly Part No.	Emitted Color	LED Part No.	
FLP2FVX.X-BC	HE RED	3PCC F	
FLPZFVA.A-DC	GREEN	3BCC-F	
FLP2FVX.X-YG	YELLOW	ance vie e	
FLPZFVA.A-1G	GREEN	3BCC-Y/G-F	
FLP2FVX.X-RY	YELLOW	ance n/v r	
FLPZFVA.A-N1	HE RED	3BCC-R/Y-F	
FLP2FVX.X-AG	AMBER	3PCC A /C F	
FLPZFVA.A-AG	GREEN	3BCC-A/G-F	
FLP2FVX.X-SBC	SUPER RED	3SBCC-F	
FLPZFVX.X-SBC	HE GREEN	33BCC-F	
FLP2FVX.X-SYG	SUPER YELLOW	SCRCC V/C E	
FLPZFVA.A-SYG	HE GREEN	3SBCC-Y/G-F	
LIDSEVA A CDA	SUPER RED	SCRCC R/V F	
FLP2FVX.X-SRY	SUPER YELLOW	3SBCC-R/Y-F	



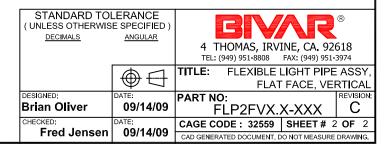

NOTES:

1. REFERENCE LED PRINTS FOR OPTICAL/ELECTRICAL SPECIFICATIONS