

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



November 2014

FMBM5551 NPN General-Purpose Amplifier

Features

- · This device has matched dies
- Sourced from process 16
- · See MMBT5551 for characteristics




Figure 1. Device Package




Figure 2. Internal Connection

Ordering Information

Part Number	Top Mark	Package	Packing Method
FMBM5551 3S2		SSOT 6L	Tape and Reel

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only. Values are at $T_A = 25^{\circ}\text{C}$ unless otherwise noted.

Symbol	Parameter	Value	Unit
V _{CEO}	Collector-Emitter Voltage	160	V
V _{CBO}	Collector-Base Voltage	180	V
V _{EBO}	Emitter-Base Voltage	6	V
I _C	Collector Current (DC)	600	mA
T _J	Junction Temperature	150	°C
T _{STG}	Storage Temperature Range	-55 to 150	°C

Thermal Characteristics (1), (2)

Values are at $T_A = 25$ °C unless otherwise noted.

Symbol	Parameter	Value	Unit
P _D	Power Dissipation (T _C = 25°C)	0.7	W
	Derate Above 25°C	5.6	mW/°C
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	180	°C/W

Notes:

- 1. P_D total, for both transistors. For each transistor, P_D = 350 mW.
- 2. PCB size: FR-4, 76 mm x 114 mm x 1.57 mm (3.0 inch x 4.5 inch x 0.062 inch) with minimum land pattern size.

Electrical Characteristics

Values are at $T_A = 25$ °C unless otherwise noted.

Symbol	Parameter	Conditions	Min.	Max.	Unit
BV _{CEO}	Collector-Emitter Breakdown Voltage	$I_C = 1 \text{ mA}, I_B = 0$	160		V
BV _{CBO}	Collector-Base Breakdown Voltage	$I_C = 100 \mu A, I_E = 0$	180		V
BV _{EBO}	Emitter-Base Breakdown Voltage	$I_E = 10 \mu A, I_C = 0$	6		V
	Callacter Cost Off Commant	V _{CB} = 120 V, I _E = 0		50	nA
I _{CBO}	Collector Cut-Off Current	$V_{CB} = 120 \text{ V}, I_{E} = 0, T_{A} = 100^{\circ}\text{C}$		50	μΑ
I _{EBO}	Emitter Cut-Off Current	$V_{EB} = 4 \text{ V}, I_{C} = 0$		50	nA
h _{FE1}	DC Current Gain	$V_{CE} = 5 \text{ V}, I_{C} = 1 \text{ mA}$	80		
DIVID1	Variation Ratio of h _{FE1} Between Die 1 and Die 2	h _{FE1} (Die1) / h _{FE1} (Die2)	0.9	1.1	
h _{FE2}	DC Current Gain	$V_{CE} = 5 \text{ V}, I_{C} = 10 \text{ mA}$	80	250	
DIVID2	Variation Ratio of h _{FE2} Between Die 1 and Die 2	h _{FE2} (Die1) / h _{FE2} (Die2)	0.95	1.05	
h _{FE3}	DC Current Gain	$V_{CE} = 5 \text{ V}, I_{C} = 50 \text{ mA}$	30		
DIVID3	Variation Ratio of h _{FE3} Between Die 1 and Die 2	h _{FE3} (Die1) / h _{FE3} (Die2)	0.9	1.1	
\/ (aat)	Collector-Emitter Saturation Voltage	I _C = 10 mA, I _B = 1 mA		0.15	- V
V _{CE} (sat)	Collector-Emitter Saturation voltage	$I_C = 50 \text{ mA}, I_B = 5 \text{ mA}$		0.20	
V _{BE} (sat)	Base-Emitter Saturation Voltage	$I_C = 10 \text{ mA}, I_B = 1 \text{ mA}$		1	V
VBE(Sat)	base-Emitter Saturation Voltage	$I_C = 50 \text{ mA}, I_B = 5 \text{ mA}$		1	
V _{BE} (on)	Base-Emitter On Voltage	$V_{CE} = 5 \text{ V}, I_{C} = 10 \text{ mA}$		1	V
DEL	Difference of V _{BE} (on) Between Die1 and Die 2	V _{BE} (on)(Die1) - V _{BE} (on)(Die2)	-8	8	mV
C _{ob}	Output Capacitance	$V_{CB} = 10 \text{ V}, I_{E} = 0, f = 1 \text{ MHz}$		6	pF
C _{ib}	Input Capacitance	$V_{EB} = 0.5 \text{ V}, I_{C} = 0, f = 1 \text{ MHz}$		20	pF
f _T	Current Gain Bandwidth Product	V _{CE} = 10 V, I _C = 10 mA, f = 100 MHz	100	300	MHz
NF	Noise Figure	$\begin{split} &V_{CE}=5~V,~I_{C}=200~\mu\text{A},\\ &f=1~\text{MHz},~R_{S}=20~\text{k}\Omega,\\ &B=200~\text{Hz} \end{split}$		8	dB
h _{fe}	Small Signal Current Gain	V _{CE} = 10 V, I _C = 1.0 mA, f = 10 kHz	50	250	

Typical Performance Characteristics




Figure 3. Typical Pulsed Current Gain vs. Collector Current




Figure 4. Collector-Emitter Saturation Voltage vs. Collector Current




Figure 5. Base-Emitter Saturation Voltage vs. Collector Current




Figure 6. Base-Emitter On Voltage vs. Collector Current




Figure 7. Collector Cut-Off Current vs. Ambient Temperature




Figure 8. Collector-Emitter Breakdown Voltage with Resistance Between Emitter-Base

Typical Performance Characteristics (Continued)




Figure 9. Input and Output Capacitance vs. Reverse Voltage




Figure 10. Small Signal Current Gain vs. Collector Current

Physical Dimensions

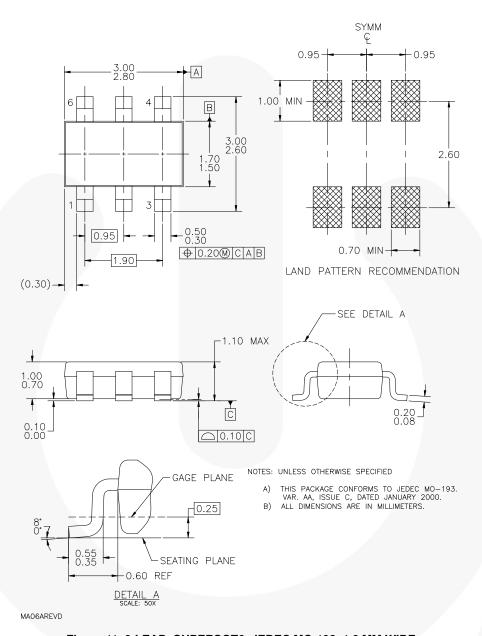


Figure 11. 6-LEAD, SUPERSOT6, JEDEC MO-193, 1.6 MM WIDE



TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

 AccuPower™
 F-PFS™

 Awinda®
 FRFET®

 AX-CAP®*
 Global Power Resource

 BitSiC™
 GreenBridge™

 BitSiC™
 GreenBridge™

 Build it Now™
 Green FPS™

 CorePLUS™
 Green FPS™ e-Series™

CorePOWER™ Gmax™

CROSSVOLT™ GTO™

CTL™ IntelliMAX™

Current Transfer Logic™ ISOPI ANAR™

Sopi ANAR™

DEUXPEED[®] Making Small Speakers Sound Louder Dual Cool™ and Better™

 Dual Cool™
 and Better™

 EcoSPARK®
 MegaBuck™

 EfficientMax™
 MICROCOUPLER™

 ESBC™
 MicroFET™

 MicroPak™
 MicroPak™

MicroPak2™ Fairchild® MillerDrive™ Fairchild Semiconductor® MotionMax™ FACT Quiet Series™ MotionGrid® FACT FAST® MTi[®] MTx® FastvCore™ MVN® FFTBench™ mWSaver® **FPS™**

OptoHiT™ OPTOLOGIC® OPTOPLANAR®

® PowerTrench® PowerXS™

Programmable Active Droop™

QFĒT[®]
QS™
Quiet Series™
RapidConfigure™

Saving our world, 1mW/W/kW at a time™

SignalWise™ SmartMax™ SMART START™

Solutions for Your Success™

Solutions for You SPM® STEALTH™ SuperFET® SuperSOT™-3 SuperSOT™-8 SupreMOS® SyncFET™ Sync-Lock™ SYSTEM GENERAL®*

TinyBoost®
TinyBuck®
TinyCalc™
TinyLogic®
TinYPOPTO™
TinyPower™
TinyPWM™
TinyWire™
TranSiC™
TriFault Detect™

TRUECURRENT®*
µSerDes™

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT http://www.fairchildsemi.com, FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OF CIRCUIT DESCRIBED HEREIN, NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. 172

^{*} Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor nessure any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, a

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative