



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Two-stage general-purpose filter

# FN 660

- Current ratings from 1 to 20A
- High differential and common mode attenuation
- Four choices of output connector
- Optional medical versions (B type)
  
- Nennströme von 1 bis 20A
- Gute differentielle und Gleichtakt-Dämpfung
- Vier Anschlußarten
- Für medizinische Geräte als Option (Typ B)
  
- Courants de service de 1 à 20A
- Bonne atténuation en modes différentiel et commun
- Quatre types de connexions de sortie
- Version pour appareils médicaux en option (type B)



### Filter selection table

Choose the family FN xxx with the required current rating and features, and add /?? to determine input/output (line/load) connection style. Example: FN 660-3/07 is a 3A filter with wire connections.

### Approvals




Family	Connections				Current ratings at 40°C (25°) A	Inductance L/L1 mH	Housing	Weight g			
								/03	/06	/07	/10
FN 660 -1 /??		/06	/07		1 (1.15)	3/3	H21	115	125		
FN 660 -3 /??		/06	/07		3 (3.4)	2/2	K1	170	180		
FN 660 -6 /??		/06	/07		6 (6.9)	0.75/0.75	K1	170	180		
FN 660 -10 /??		/06	/07		10 (11.5)	0.45/0.45	K21	230	240		
FN 660 -16 /??	/03	/06		/10	16 (18.4)	0.44/0.44	K2	290	260		290
FN 660 -20 /??	/03	/06		/10	20 (23)	0.48/0.48	L1	600	590		640

### Additional specifications

Filter type	Capacitance		Res. R MΩ	Maximum leakage μA/phase	Maximum operating voltage		Operating frequency Hz	Hipot test voltage	
	Cx nF	Cy nF			VAC	Hz		PN→E VAC	P→N VAC
Standard types	150	2.2	1	190	250	50/60	DC to 400	2000	1700
B types (medical)	150		1	2	250	50/60	DC to 400	2500	1700

MTBF at 40°C, 230V, per Mil-HB-217F: 350,000 hours (for VDE-approved current ratings).

### Electrical schematic

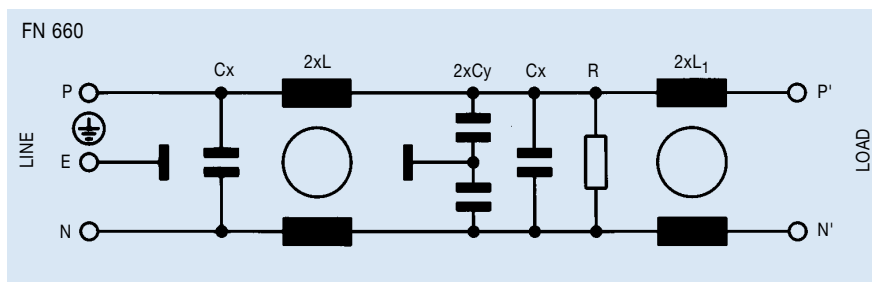


See tables for component values.


# FN 660 insertion loss

Per CISPR 17; A = 50Ω/50Ω sym, B = 50Ω/50Ω asym, C = 0.1Ω/100Ω sym, D = 100Ω/0.1Ω sym


## 1 amp types




## 3 amp types




## 6 amp types




## 10 amp types



## 16 amp types





## 20 amp types




## Mechanical data

	FN 660-1 H21	Tol. mm
<b>A</b>	71	± 0.5
<b>B</b>	46.6	± 1
<b>C</b>	29	± 1
<b>D</b>	50.5	± 1
<b>F</b>	61	± 0.2
<b>J</b>	21 <sup>(J1)</sup> 8.5 <sup>(J2)</sup>	± 0.5
<b>K</b>	10.5	± 0.3
<b>L</b>	19	± 0.5
<b>M</b>	5.3	± 0.1
<b>N</b>	6.3	± 0.1
<b>Y</b>	6	± 1
<b>Z</b>	140	+ 5

### Front view




### Top view

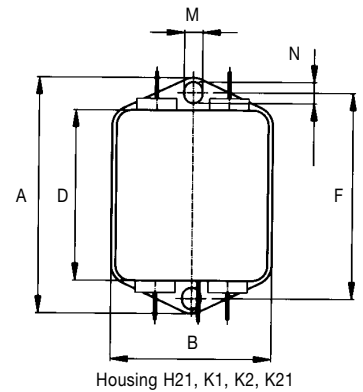


	FN 660 -3-6 K1	FN 660 -10/-16 K2, K21	FN 660 -20 L1	Tol.* mm
<b>A</b>		85	105	± 0.5
<b>B</b>		54	99.5 ± 1	± 0.5
<b>C</b>	30	40	38	± 1
<b>D</b>		65	84.5	± 1
<b>E</b>			79	± 0.5
<b>F</b>		75	95	± 0.2
<b>G</b>			51	± 0.1
<b>J</b>	27 <sup>(J1)</sup> 8.5 <sup>(J2)</sup>	27	40	± 0.5
<b>K</b>	7	12	9.5	± 0.5
<b>L</b>		29.5	19	± 0.5
<b>M</b>		5.3	4.4	± 0.1
<b>N</b>		6.3	6	± 0.1
<b>W</b>	AWG 16			-
<b>Y</b>		6		± 1
<b>Z</b>	300	140 + 5		+ 10

### Front view



### Top view

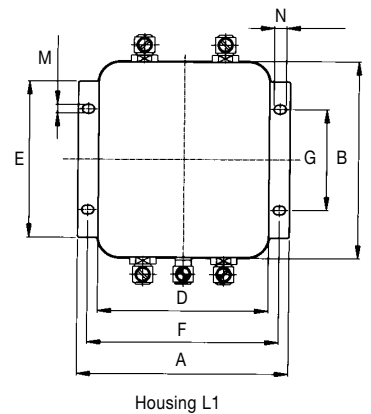

\* Measurements share this common tolerance unless otherwise stated.

All dimensions in mm; 1 inch = 25.4 mm