



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



8E9001RS

('ON 0NIMVHD) 号号图

版数 REV.	年月日 DATE	DGN NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
2	19.Apr.2004	054913	CORRECTION OF SPECIFICATION NO.	H.KOBAYASHI	H.KOBAYASHI	H. Shimazu	A. Onogawa

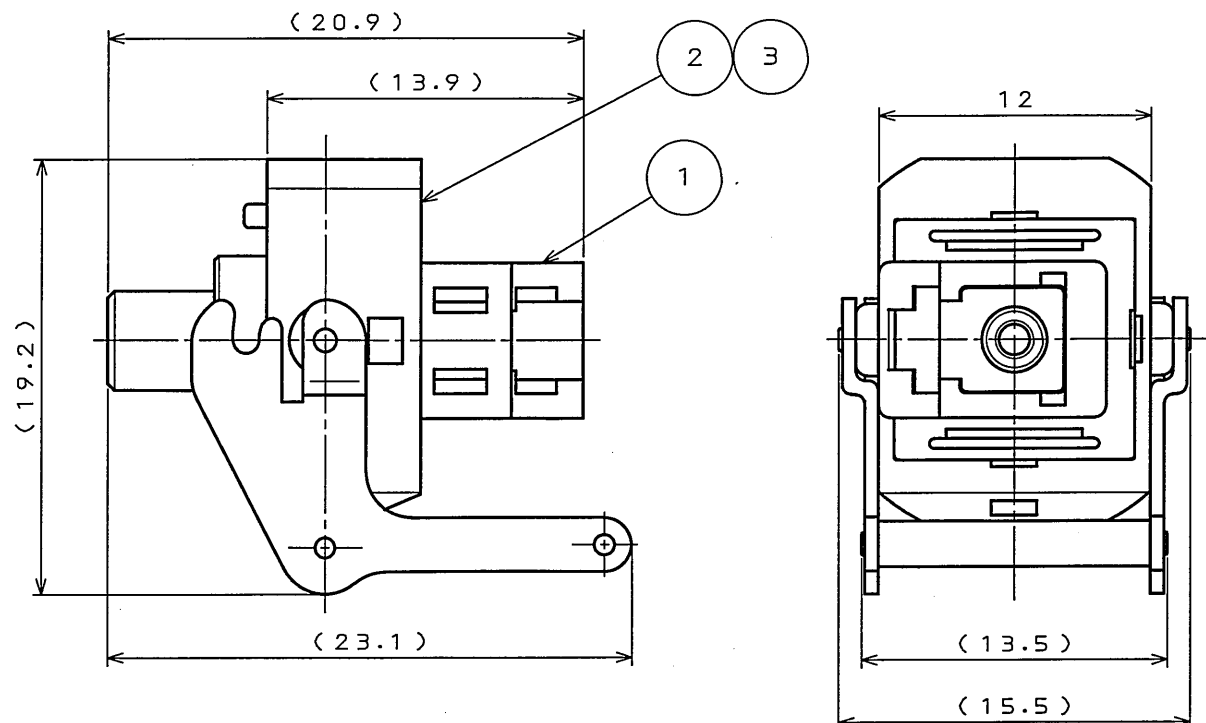

1. Optical Performance

(The performance when the item is mated with FO-FC-RS-A2)

Insertion Loss 0.5dB Max

note1. The value shows insertion loss in case that a master optical connector, to which PC connection is available, and a master optical connector, to which PC connection is available, are connected.

note2. Order in which the plugs are mated:
1st: FC plug, 2nd: LC plug.

2. Mechanical Performance

Unlock force of lever : 2.9N MIN

1. 光学性能 (FO-FC-RS-A2と嵌合した時の性能である)


挿入損失 0.5dB以下

注1. PC接続が可能なマスター光コネクタとPC接続が可能なマスター光コネクタを接続した場合である。

注2. フラグの結合は、FCプラグ、LCプラグの順とする。

2. 機械性能

レバー離脱力: 2.9N以上

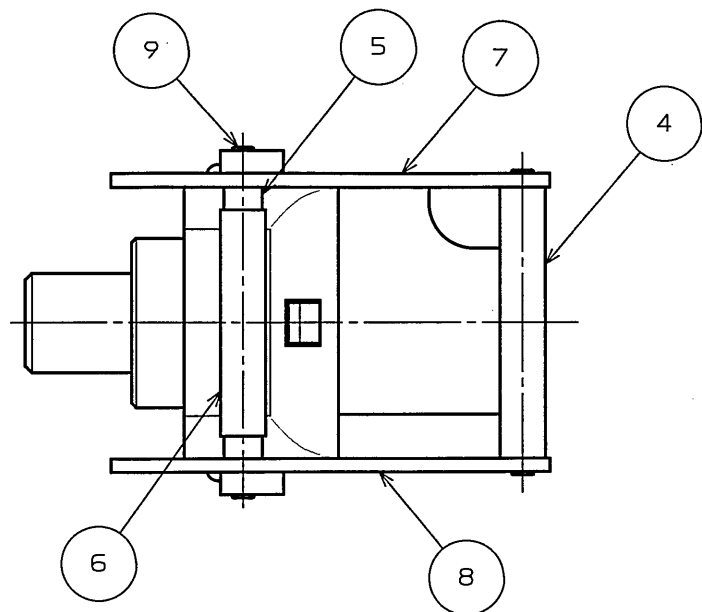

符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
9	PARALLEL PIN	2	STAINLESS STEEL		
8	LEVER B	1	STAINLESS STEEL		
7	LEVER A	1	STAINLESS STEEL		
6	SUS PIPE	1	STAINLESS STEEL		
5	LEVER PIN 2	1	STAINLESS STEEL		
4	LEVER PIN 1	1	STAINLESS STEEL		
3	CONVERSION SLEEVE	1	CERAMIC		
2	LC FLANGE	1	ZINC ALLOY	NICKEL PLATING	
1	LC HOUSING	1	SYNTHETIC RESIN		

仕様書 (SPECIFICATION)		第1版 (ORIGINAL DATE)	尺貫 (SCALE)		JAE CONNECTOR DIV. PROPRIETARY. COPYRIGHT (C) 2004. JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.
△ JACS-70011		31.Mar.2004	N:6		
公差 (GENERAL TOLERANCE)		製図 DR.	名称 (TITLE)		
寸法 (DIMENSION)		担当 CHK.	FO-FC-FS (LC-A2)		
. ±0.8		査閲 APPD.	-STD	JAPAN AVIATION ELECTRONICS INDUSTRY, LTD. 	図面番号 (DRAWING NO.) SJ100638
.X ±0.4		承認 APPD.			
.XX ±0.1					
.XXX ±				重量 (WEIGHT)	版数 (REV.)

DOF-0-212E(03.08)

