



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# HCMOS 3.2x2.5mm SMD Oscillator O3HS DATASHEET

(Former F300, F310, F330, F340, Series)

- HCMOS Output
- Stabilities to  $\pm 20$  PPM
- Temperature Ranges as wide as  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Supply Voltages: 1.0V, 1.8V, 2.5V, 3.3V

## 1.0V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range ( $F_O$ )	1.800 ~ 50.000 MHz
Storage Temperature Range ( $T_{STG}$ )	$-55 \sim +125^{\circ}\text{C}$
Supply Voltage ( $V_{DD}$ )	$1.0\text{V} \pm 5\%$
Input Current ( $I_{DD}$ )	
1.800 ~ 32.100 MHz	2.5 mA
$>32.100 \sim 50.000$ MHz	3.5 mA
Standby Current	5 $\mu\text{A}$
Output Symmetry (50% $V_{DD}$ )	40 % ~ 60 %
Rise/Fall Time (20%/80% $V_{DD}$ Levels) ( $T_R/T_F$ )	
1.800 ~ 32.100 MHz	5 nS
$>32.100 \sim 50.000$ MHz	3.5 nS
Output Voltage ( $V_{OL}$ )	20 % $V_{DD}$
( $V_{OH}$ )	80 % $V_{DD}$ Min
Output Load (HCMOS)	15 pF
Start-up Time ( $T_S$ )	5 mS
Output Disable Time <sup>1</sup>	300 nS
Output Enable Time <sup>1</sup>	5 mS

## ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN <sup>1</sup>	Active
'1' Level $V_{IH} \geq 70\% V_{DD}$	Active
'0' Level $V_{IL} \leq 30\% V_{DD}$	High Z

## • Available Options by Stability & Operating Temp for 1.0V

Frequency Stability <sup>2</sup>	Operating Temperature ( $^{\circ}\text{C}$ )	Frequency Range (MHz)
$\pm 100\text{PPM}$	$-10 \sim +70$	1.800 ~ 50.000
$\pm 100\text{PPM}$	$-40 \sim +85$	1.800 ~ 50.000
$\pm 50\text{PPM}$	$-10 \sim +70$	1.800 ~ 50.000
$\pm 50\text{PPM}$	$-40 \sim +85$	1.800 ~ 50.000
$\pm 25\text{PPM}$	$-10 \sim +70$	1.800 ~ 50.000
$\pm 25\text{PPM}$	$-40 \sim +85$	1.800 ~ 50.000
$\pm 20\text{PPM}^*$	$-10 \sim +70$	1.800 ~ 50.000

<sup>1</sup> An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

<sup>2</sup> Inclusive of  $25^{\circ}\text{C}$  tolerance, operating temperature range, input voltage change, load change, reflow, and one year aging. \*Excludes Shock/Vibration.





# HCMOS 3.2x2.5mm SMD Oscillator O3HS DATASHEET

(Former F300, F310, F330, F340, Series)

- HCMOS Output
- Stabilities to  $\pm 25$  PPM
- Temperature Ranges as wide as  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Supply Voltages: 1.0V, 1.8V, 2.5V, 3.3V

## 1.8V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range ( $F_O$ )	0.625 ~ 133.000 MHz
Storage Temperature Range ( $T_{STG}$ )	$-55 \sim +125^{\circ}\text{C}$
Supply Voltage ( $V_{DD}$ )	$1.8 \pm 5\%$
Input Current ( $I_{DD}$ )	
1.000 ~ 32.000 MHz	6 mA
$>32.000 \sim 80.000$ MHz	15 mA
$>80.000 \sim 133.000$ MHz	20 mA
Standby Current	10 $\mu\text{A}$
Output Symmetry (50% $V_{DD}$ )	40 % ~ 60 %
Rise/Fall Time (20%/80% $V_{DD}$ Levels) ( $T_R/T_F$ )	
0.625 ~ 32.000 MHz	5 nS
$>32.000 \sim 133.000$ MHz	3.5 nS
Output Voltage ( $V_{OL}$ )	20 % $V_{DD}$
( $V_{OH}$ )	80 % $V_{DD}$ Min
Output Load (HCMOS)	15 pF
Start-up Time ( $T_S$ )	10 mS
Output Disable Time <sup>1</sup>	300 nS
Output Enable Time <sup>1</sup>	10 mS

## ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN <sup>1</sup>	Active
'1' Level $V_{IH} \geq 70\% V_{DD}$	Active
'0' Level $V_{IL} \leq 30\% V_{DD}$	High Z

## • Available Options by Stability & Operating Temp for 1.8V

Frequency Stability <sup>2</sup>	Operating Temperature ( $^{\circ}\text{C}$ )	Frequency Range (MHz)
$\pm 100$ PPM	$-10 \sim +70$	0.625 ~ 133.000
$\pm 100$ PPM	$-40 \sim +85$	0.625 ~ 133.000
$\pm 50$ PPM	$-10 \sim +70$	0.625 ~ 133.000
$\pm 50$ PPM	$-40 \sim +85$	0.625 ~ 133.000
$\pm 25$ PPM	$-10 \sim +70$	0.625 ~ 133.000
$\pm 25$ PPM	$-40 \sim +85$	0.625 ~ 133.000
$\pm 20$ PPM*	$-10 \sim +70$	0.625 ~ 133.000

<sup>1</sup> An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

<sup>2</sup> Inclusive of  $25^{\circ}\text{C}$  tolerance, operating temperature range, input voltage change, load change, reflow, and one year aging. \*Excludes Shock/Vibration.

	Title / Description: O3HS SERIES STANDARD SPECIFICATIONS	
	Drawing Number: 101165	Size: A
	Part Number:	Cage: 61429
	Draftsperson: YM	Approved: BEC
© Copyright 2017 Fox Electronics, All rights reserved		Revision Date: 09/07/2017



# HCMOS 3.2x2.5mm SMD Oscillator O3HS DATASHEET

(Former F300, F310, F330, F340, Series)

- HCMOS Output
- Stabilities to  $\pm 20$  PPM
- Temperature Ranges as wide as  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Supply Voltages: 1.0V, 1.8V, 2.5V, 3.3V

## 2.5V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range ( $F_0$ )	0.625 ~ 170.000 MHz
Storage Temperature Range ( $T_{STG}$ )	$-55 \sim +125^{\circ}\text{C}$
Supply Voltage ( $V_{DD}$ )	$2.5 \pm 5\%$
Input Current ( $I_{DD}$ )	
0.625 ~ 32.000 MHz	6 mA
$>32.000 \sim 60.000$ MHz	15 mA
$>60.000 \sim 80.000$ MHz	20 mA
$>80.000 \sim 170.000$ MHz	30 mA
Standby Current	10 $\mu\text{A}$
Output Symmetry (50% $V_{DD}$ )	45 % ~ 55 %
Rise/Fall Time (10%/90% $V_{DD}$ Levels) ( $T_R/T_F$ )	6 nS
Output Voltage ( $V_{OL}$ )	10 % $V_{DD}$
( $V_{OH}$ )	90 % $V_{DD}$ Min
Output Load (HCMOS)	15 pF
Start-up Time ( $T_S$ )	5 mS
Output Disable Time <sup>1</sup>	150 nS
Output Enable Time <sup>1</sup>	5 mS

### ENABLE / DISABLE FUNCTION


Pin1	Output (pin 3)
OPEN <sup>1</sup>	Active
'1' Level $V_{IH} \geq 70\% V_{DD}$	Active
'0' Level $V_{IL} \leq 30\% V_{DD}$	High Z

### • Available Options by Stability & Operating Temp for 2.5V

Frequency Stability <sup>2</sup>	Operating Temperature ( $^{\circ}\text{C}$ )	Frequency Range (MHz)
$\pm 100\text{PPM}$	$-10 \sim +70$	0.625 ~ 170.000
$\pm 100\text{PPM}$	$-20 \sim +70$	0.625 ~ 170.000
$\pm 100\text{PPM}$	$-40 \sim +85$	0.625 ~ 170.000
$\pm 50\text{PPM}$	$-10 \sim +70$	0.625 ~ 170.000
$\pm 50\text{PPM}$	$-20 \sim +70$	0.625 ~ 170.000
$\pm 50\text{PPM}$	$-40 \sim +85$	0.625 ~ 170.000
$\pm 25\text{PPM}$	$-10 \sim +70$	0.625 ~ 170.000
$\pm 25\text{PPM}$	$-20 \sim +70$	0.625 ~ 170.000
$\pm 25\text{PPM}$	$-40 \sim +85$	0.625 ~ 170.000
$\pm 20\text{PPM}^*$	$-10 \sim +70$	0.625 ~ 170.000
$\pm 20\text{PPM}^*$	$-20 \sim +70$	0.625 ~ 170.000

<sup>1</sup> An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

<sup>2</sup> Inclusive of  $25^{\circ}\text{C}$  tolerance, operating temperature range, input voltage change, load change, reflow, and one year aging. \*Excludes Shock/Vibration.

 © Copyright 2017 Fox Electronics, All rights reserved	<b>Title / Description:</b> O3HS SERIES STANDARD SPECIFICATIONS	
	<b>Drawing Number:</b> 101165	<b>Size:</b> A
	<b>Part Number:</b>	<b>Cage:</b> 61429
	<b>Draftsperson:</b> YM	<b>Approved:</b> BEC
		<b>Revision Date:</b> 09/07/2017



# HCMOS 3.2x2.5mm SMD Oscillator O3HS DATASHEET

(Former F300, F310, F330, F340, Series)

- HCMOS Output
- Stabilities to  $\pm 20$  PPM
- Temperature Ranges as wide as  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Supply Voltages: 1.0V, 1.8V, 2.5V, 3.3V

## 3.3V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range ( $F_O$ )	0.625 ~ 170 MHz
Storage Temperature Range ( $T_{STG}$ )	$-55 \sim +125^{\circ}\text{C}$
Supply Voltage ( $V_{DD}$ )	$3.3\text{V} \pm 10\%$
Input Current ( $I_{DD}$ )	
0.625 ~ 20.000 MHz	7 mA
>20.000 ~ 40.000 MHz	13 mA
>40.000 ~ 60.000 Mhz	19 mA
>60.000 ~ 75.000 Mhz	24 mA
>75.000 ~ 80.000 Mhz	30 mA
>80.000 ~ 125.000 Mhz	40 mA
>125.000 ~ 170.000 Mhz	50 mA
Standby Current	10 $\mu\text{A}$
Output Symmetry (50% $V_{DD}$ )	45 % ~ 55 %
Rise/Fall Time (10%/90% $V_{DD}$ Levels) ( $T_R/T_F$ )	6 nS
Output Voltage ( $V_{OL}$ )	10 % $V_{DD}$
( $V_{OH}$ )	90 % $V_{DD}$ Min
Output Load (HCMOS)	15 pF
Start-up Time ( $T_S$ )	5 mS
Output Disable Time <sup>1</sup>	150 nS
Output Enable Time <sup>1</sup>	5 mS

## ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN <sup>1</sup>	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

## • Available Options by Stability & Operating Temp for 3.3V

Frequency Stability <sup>2</sup>	Operating Temperature ( $^{\circ}\text{C}$ )	Frequency Range (MHz)
$\pm 100\text{PPM}$	$-10 \sim +70$	0.625 ~ 170.000
$\pm 100\text{PPM}$	$-20 \sim +70$	0.625 ~ 170.000
$\pm 100\text{PPM}$	$-40 \sim +85$	0.625 ~ 170.000
$\pm 50\text{PPM}$	$-10 \sim +70$	0.625 ~ 170.000
$\pm 50\text{PPM}$	$-20 \sim +70$	0.625 ~ 170.000
$\pm 50\text{PPM}$	$-40 \sim +85$	0.625 ~ 170.000
$\pm 25\text{PPM}$	$-10 \sim +70$	0.625 ~ 170.000
$\pm 25\text{PPM}$	$-20 \sim +70$	0.625 ~ 170.000
$\pm 25\text{PPM}$	$-40 \sim +85$	0.625 ~ 170.000
$\pm 20\text{PPM}^*$	$-10 \sim +70$	0.625 ~ 170.000
$\pm 20\text{PPM}^*$	$-20 \sim +70$	0.625 ~ 170.000


<sup>1</sup> An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

<sup>2</sup> Inclusive of  $25^{\circ}\text{C}$  tolerance, operating temperature range, input voltage change, load change, reflow, and one year aging. \*Excludes Shock/Vibration.


	Title / Description: O3HS SERIES STANDARD SPECIFICATIONS		
	Drawing Number: 101165		Size: A
	Part Number:		Cage: 61429
	Draftsperson: YM	Approved: BEC	Revision Date: 09/07/2017



## DIMENSIONS / MECHANICAL SPECIFICATIONS

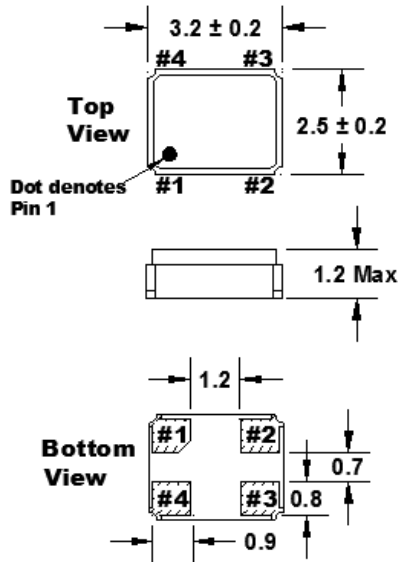

### Recommended Solder Pad Layout



### Pin Connections

#1 E/D    #3 Output  
#2 GND    #4 V<sub>DD</sub>

Maximum Soldering Temp / Time	260°C / 10 Seconds
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni
Seal Method	Seam Seal
Lead (Pb) Free	Yes
ROHS/REACH Compliant	Yes


**Notes:**

- \*A 0.01μF capacitor should be placed between V<sub>DD</sub> (Pin 4) and GND (Pin2) to minimize power supply line noise.
- \*Dimensional drawing is for reference to critical specifications defined by size measurements.
- Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary



# HCMOS 3.2x2.5mm SMD Oscillator O3HS DATASHEET

(Former F300, F310, F330, F340, Series)

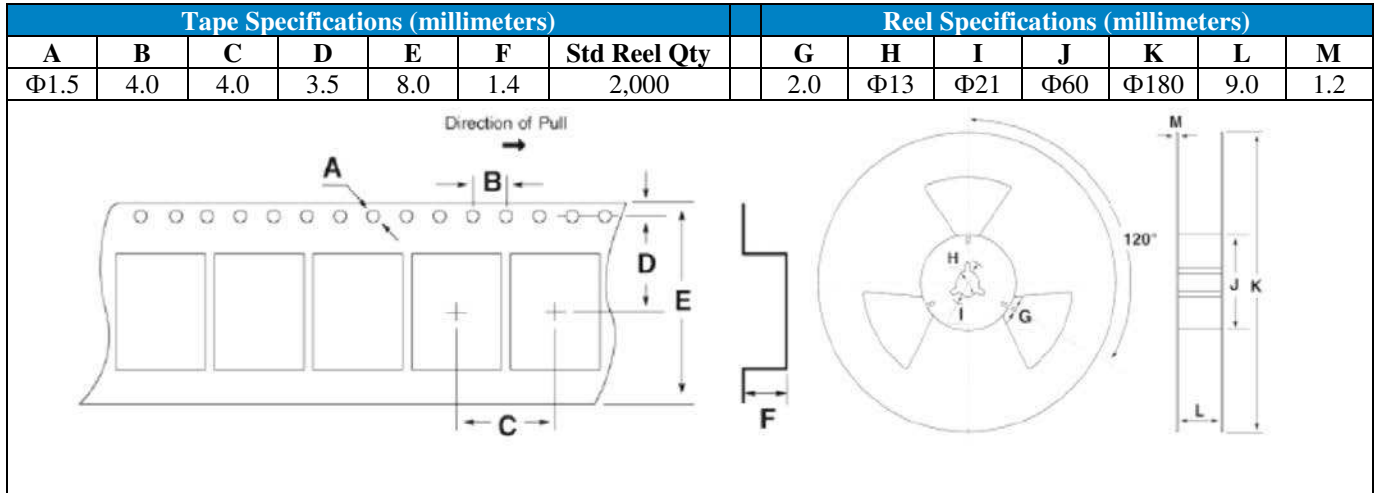

## Available Options & Part Identification\*

Example: F O3HS C B M 25.0

F	O3HS	C	B	M	25.0
<b>Fox</b>	<b>Model Number</b>	<b>Voltage</b> M = 1.0V±5% K = 1.8V±5% H = 2.5V±5% <b>C = 3.3V±10%</b>	<b>Stability</b> A = 100 PPM <b>B = 50 PPM</b> D = 25 PPM E = 20 PPM	<b>Operating Temperature</b> E = -10 to +70°C F = -20 to +70°C <b>M = -40 to +85°C</b>	<b>Frequency (MHz)</b>

\*Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available. See stabilities and op temps for each V<sub>DD</sub>.



**Corporate Headquarters**  
5570 Enterprise Parkway  
Fort Myers, FL 33905  
<http://www.FOXONLINE.com>

**Sales**  
1-888-GET-2-FOX (1-888-438-2369)  
or  
1-239-693-0099  
<http://www.FOXONLINE.com/repdisty>

**Tech Support**  
<http://www.FOXONLINE.com/email>

**Product use:** Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics or any third parties.

Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics.

Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third party owners.

	<b>Title / Description:</b> O3HS SERIES STANDARD SPECIFICATIONS		
	<b>Drawing Number:</b> 101165		<b>Size:</b> A
	<b>Part Number:</b>		<b>Cage:</b> 61429
	<b>Draftsperson:</b> YM	<b>Approved:</b> BEC	<b>Revision Date:</b> 09/07/2017

© Copyright 2017 Fox Electronics. All rights reserved