



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# HCMOS 7.5x5mm SMD Oscillator

## O7HS

(former F4500, F4400, F4100 Series)

### DATASHEET

- HCMOS Output
- Stabilities to  $\pm 20$  PPM
- Temperature Ranges: (-20°C to +70°C) or (-40°C to +85°C)

## 1.8V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range ( $F_O$ )	1.800 ~ 160.000 MHz
Storage Temperature Range ( $T_{STG}$ )	-55 ~ +125°C
Supply Voltage ( $V_{DD}$ )	1.8V $\pm$ 5%
Input Current ( $I_{DD}$ )	
1.800 ~ 32.000 MHz	7 mA
32.000001 ~ 70.000 MHz	15 mA
70.000001 ~ 120.000 MHz	20 mA
120.000001 ~ 160.000 MHz	35 mA
Standby Current	10 $\mu$ A
Output Symmetry (50% $V_{DD}$ )	40 % ~ 60 %
Rise/Fall Time (20%/80% $V_{DD}$ Levels) ( $T_R/T_F$ )	
1.800 ~ 32.000 MHz	5.0 nS
32.000001 ~ 120.000 MHz	3.5 nS
120.000001 ~ 160.000 MHz	3.0 nS
Output Voltage ( $V_{OL}$ ) ( $V_{OH}$ )	20% $V_{DD}$ 80% $V_{DD}$ Min
Output Current ( $I_{OL}$ ) ( $I_{OH}$ )	2 mA Min -2 mA Min
Output Load (HCMOS)	15 pF
Start-up Time ( $T_S$ )	10 mS
Output Disable Time <sup>1</sup>	300 nS
Output Enable Time <sup>1</sup>	10 mS

## ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN <sup>1</sup>	Active
'1' Level $V_{IH} \geq 70\% V_{DD}$	Active
'0' Level $V_{IL} \leq 30\% V_{DD}$	High Z

## • Available Options by Stability & Operating Temp for 1.8V<sup>2</sup>

Frequency Stability <sup>2</sup>	Operating Temperature (°C)	Frequency Range (MHz)
$\pm 100$ PPM	-20 ~ +70	1.800 ~ 160.000
$\pm 100$ PPM	-40 ~ +85	1.800 ~ 160.000
$\pm 50$ PPM	-20 ~ +70	1.800 ~ 160.000
$\pm 50$ PPM	-40 ~ +85	1.800 ~ 160.000
$\pm 25$ PPM	-20 ~ +70	1.800 ~ 160.000
$\pm 25$ PPM	-40 ~ +85	1.800 ~ 160.000
$\pm 20$ PPM*	-20 ~ +70	1.800 ~ 125.000

<sup>1</sup> An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

<sup>2</sup> Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, reflow, and one year aging. \*Excludes Shock/Vibration.





# HCMOS 7.5x5mm SMD Oscillator

## O7HS

(former F4500, F4400, F4100 Series)

### DATASHEET

- HCMOS Output
- Stabilities to  $\pm 20$  PPM
- Temperature Ranges: (-20°C to +70°C) or (-40°C to +85°C)

## 2.5V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range ( $F_O$ )	1.800 ~ 200.000 MHz
Storage Temperature Range ( $T_{STG}$ )	-55 ~ +125°C
Supply Voltage ( $V_{DD}$ )	2.5V $\pm$ 5%
Input Current ( $I_{DD}$ )	
1.800 ~ 32.100 MHz	10 mA
32.100001 ~ 50.000 MHz	12 mA
50.000001 ~ 125.000 MHz	40 mA
125.000001 ~ 165.000 MHz	51 mA
165.000001 ~ 200.000 MHz	58 mA
Standby Current	10 $\mu$ A
Output Symmetry (50% $V_{DD}$ )	
1.800 ~ 50.000 MHz	45 % ~ 55 %
50.000001 ~ 200.000 MHz	40 % ~ 60 %
Rise/Fall Time (10%/90% $V_{DD}$ Levels) ( $T_R/T_F$ )	5 nS
Output Voltage ( $V_{OL}$ )	10% $V_{DD}$
( $V_{OH}$ )	90% $V_{DD}$ Min
Output Current ( $I_{OL}$ )	4 mA Min
( $I_{OH}$ )	-4 mA Min
Output Load (HCMOS)	15 pF
Start-up Time ( $T_S$ )	10 mS
Output Disable Time <sup>1</sup>	150 nS
Output Enable Time <sup>1</sup>	10 mS

## ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN <sup>1</sup>	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

## • Available Options by Stability & Operating Temp for 2.5V<sup>2</sup>

Frequency Stability <sup>2</sup>	Operating Temperature (°C)	Frequency Range (MHz)
$\pm 100$ PPM	-20 ~ +70	1.800 ~ 200.000
$\pm 100$ PPM	-40 ~ +85	1.800 ~ 156.250
$\pm 50$ PPM	-20 ~ +70	1.800 ~ 200.000
$\pm 50$ PPM	-40 ~ +85	1.800 ~ 156.250
$\pm 25$ PPM	-20 ~ +70	1.800 ~ 65.000
$\pm 25$ PPM	-40 ~ +85	1.800 ~ 50.000
$\pm 20$ PPM*	-20 ~ +70	1.800 ~ 50.000

<sup>1</sup> An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

<sup>2</sup> Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, reflow, and one year aging. \*Excludes Shock/Vibration.





# HCMOS 7.5x5mm SMD Oscillator

## O7HS

(former F4500, F4400, F4100 Series)

### DATASHEET

- HCMOS Output
- Stabilities to  $\pm 20$  PPM
- Temperature Ranges: (-20°C to +70°C) or (-40°C to +85°C)

### 3.3V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range ( $F_O$ )	0.012 ~ 170.000 MHz
Storage Temperature Range ( $T_{STG}$ )	-55 ~ +125°C
Supply Voltage ( $V_{DD}$ )	3.3V $\pm$ 10%
Input Current ( $I_{DD}$ )	
0.012 ~ 0.040 MHz	3 mA
0.040001 ~ 1.500 MHz	6 mA
1.500001 ~ 32.000 MHz	15 mA
32.000001 ~ 50.000 MHz	20 mA
50.000001 ~ 67.000 MHz	25 mA
67.000001 ~ 170.000 MHz	40 mA
Standby Current	10 $\mu$ A
Output Symmetry (50% $V_{DD}$ )	
0.012 ~ 50.000 MHz	45% ~ 55%
50.000001 ~ 170.000 MHz	40% ~ 60%
Rise/Fall Time (10%/90% $V_{DD}$ Levels) ( $T_R/T_F$ )	
0.012 ~ 80.000 MHz	6 nS
80.000001 ~ 125.000 MHz	4 nS
125.000001 ~ 170.000 MHz	3 nS
Output Voltage ( $V_{OL}$ )	10% $V_{DD}$
( $V_{OH}$ )	90% $V_{DD}$ Min
Output Current ( $I_{OL}$ )	2 mA Min
( $I_{OH}$ )	-2 mA Min
Output Load (HCMOS)	15 pF
Start-up Time ( $T_S$ )	10 mS
Output Disable Time <sup>1</sup>	150 nS
Output Enable Time <sup>1</sup>	10 mS
Jitter ( $F_O \geq 100$ MHz, 12 kHz ~ 20 MHz)	0.3 pS Typ.

### ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN <sup>1</sup>	Active
'1' Level $V_{IH} \geq 70\% V_{DD}$	Active
'0' Level $V_{IL} \leq 30\% V_{DD}$	High Z

### • Available Options by Stability & Operating Temp for 3.3V<sup>2</sup>

Frequency Stability <sup>2</sup>	Operating Temperature (°C)	Frequency Range (MHz)
$\pm 100$ PPM	-20 ~ +70	0.012 ~ 170.000
$\pm 100$ PPM	-40 ~ +85	0.012 ~ 170.000
$\pm 50$ PPM	-20 ~ +70	0.012 ~ 170.000
$\pm 50$ PPM	-40 ~ +85	0.012 ~ 170.000
$\pm 25$ PPM	-20 ~ +70	0.012 ~ 165.000
$\pm 25$ PPM	-40 ~ +85	0.012 ~ 156.520
$\pm 20$ PPM*	-20 ~ +70	0.012 ~ 162.000

<sup>1</sup> An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

<sup>2</sup> Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, reflow, and one year aging. \*Excludes Shock/Vibration.






# HCMOS 7.5x5mm SMD Oscillator

## O7HS

(former F4500, F4400, F4100 Series)

### DATASHEET

## DIMENSIONS / MECHANICAL SPECIFICATIONS

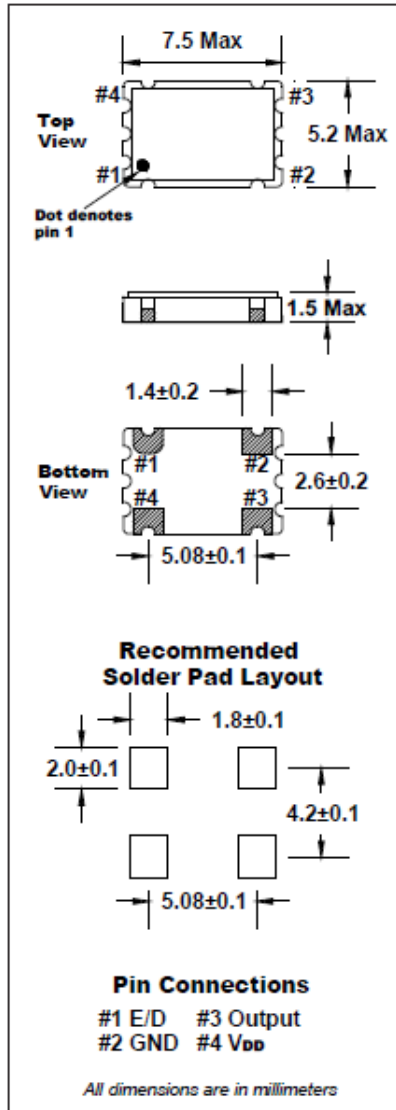

Maximum Soldering Temp / Time	260°C / 10 Seconds
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni
Seal Method	Seam Seal
Lead (Pb) Free	Yes
ROHS/REACH Compliant	Yes

#### Notes:

\*A 0.01µF capacitor should be placed between V<sub>DD</sub> (Pin 4) and GND (Pin2) to minimize power supply line noise.

\*Dimensional drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary



© Copyright 2017 Fox Electronics, All rights reserved

<b>Title / Description:</b> O7HS SERIES STANDARD SPECIFICATIONS	
<b>Drawing Number:</b> 101147	<b>Size:</b> A
<b>Part Number:</b>	<b>Cage:</b> 61429
<b>Draftsperson:</b> CMR	<b>Approved:</b> RB
<b>Revision Date:</b> 02/27/2017	




# HCMOS 7.5x5mm SMD Oscillator

## O7HS

(former F4500, F4400, F4100 Series)

### DATASHEET

Tape Specifications (millimeters)							Reel Specifications (millimeters)							
A	B	C	D	E	F	Std Reel Qty	G	H	I	J	K	L	M	
Φ1.5	4.0	8.0	7.5	16.0	2.15	2,000	2.0	Φ13	Φ21	Φ80	Φ255	17.5	2.0	

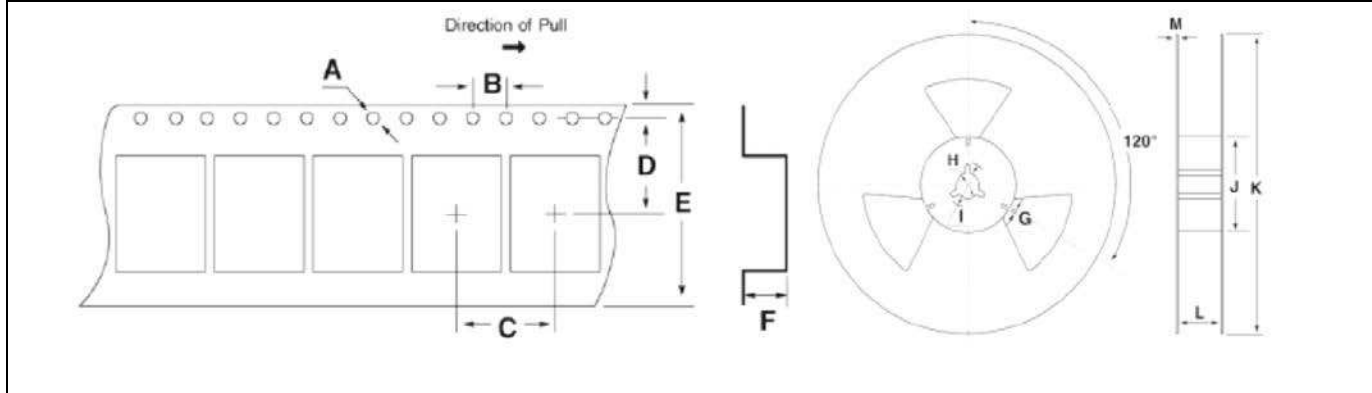

### Available Options & Part Identification\*

Example: **F O7HS C B M 25.0**

F	O7HS	C	B	M	25.0
<b>Fox</b>	<b>Model Number</b>	<b>Voltage</b> K = 1.8V±5% H = 2.5V±5% C = 3.3V±10%	<b>Stability</b> A = 100PPM B = 50PPM D = 25PPM E = 20PPM	<b>Operating Temperature</b> F = -20 to +70°C M = -40 to +85°C	<b>Frequency</b>

\*Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available. See stabilities and op temps for each V<sub>DD</sub>.



**Corporate Headquarters**  
5570 Enterprise Parkway  
Fort Myers, FL 33905  
<http://www.FOXONLINE.com>

**Sales**  
1-888-GET-2-FOX (1-888-438-2369)  
or  
1-239-693-0099  
<http://www.FOXONLINE.com/repdisty>

**Tech Support**  
<http://www.FOXONLINE.com/email>

**Product use:** Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics or any third parties.

Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics.

Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third party owners.

	<b>Title / Description:</b> O7HS SERIES STANDARD SPECIFICATIONS		
	<b>Drawing Number:</b> 101147		<b>Size:</b> A
	<b>Part Number:</b>		<b>Cage:</b> 61429
	<b>Draftsperson:</b> CMR	<b>Approved:</b> RB	<b>Revision Date:</b> 02/27/2017

© Copyright 2017 Fox Electronics. All rights reserved