



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ZORYA-SC-B

~340° decorative beam. Assembly with ZORYA adapter.


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 56 mm
Height	27.3 mm
Fastening	socket
Colour	clear
Box size	398 x 298 x 140 mm
Box weight	3.1 kg
Quantity in Box	140 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
ZORYA-SC	Lens	Silicone	clear
ZORYA-SC-ADAPTER-B	Holder	PC	clear

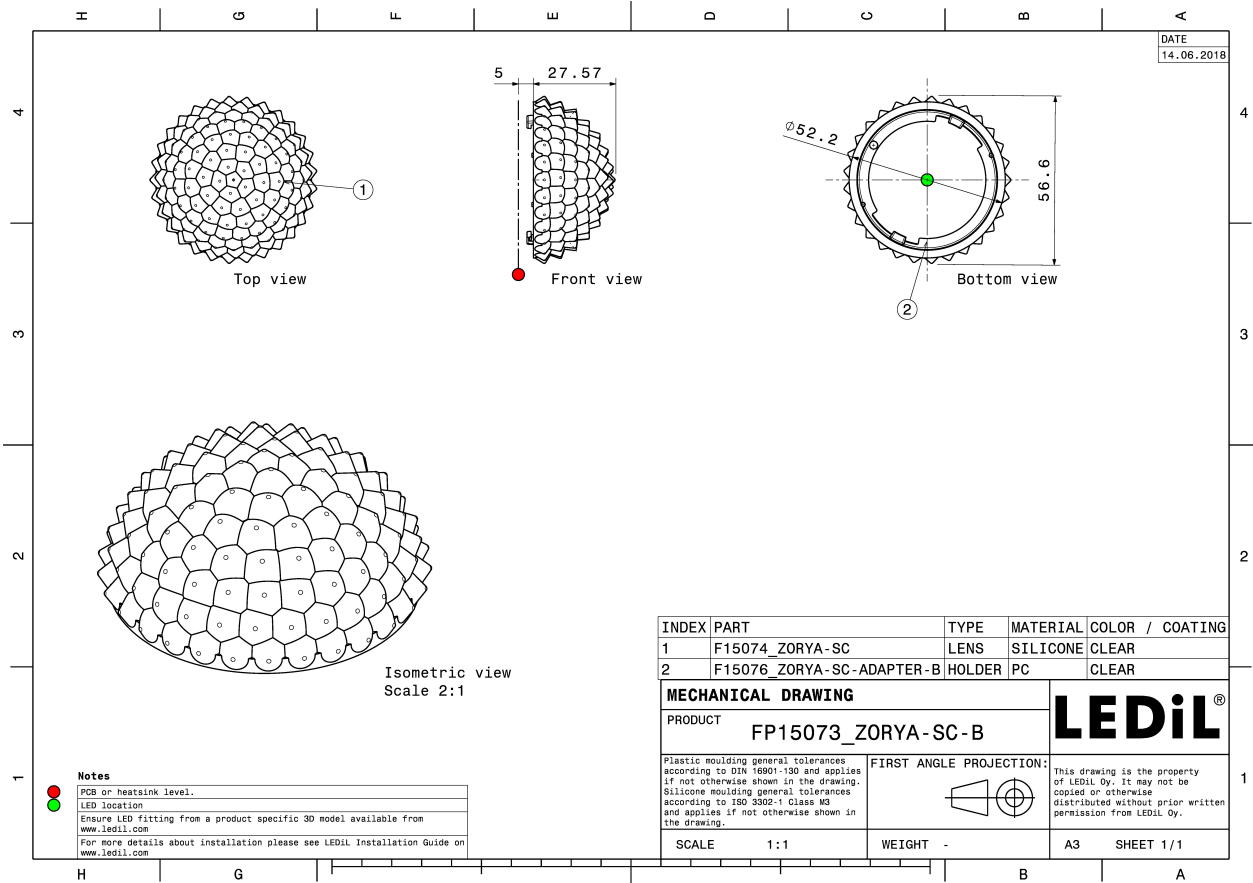

PHOTOMETRIC DATA (MEASURED):



LED LUXEON CoB 1211



FWHM 160.0°

Efficiency 94 %

Peak intensity 0.160 cd/lm

Required components:


A.A.G. STUCCHI: 8102/G2

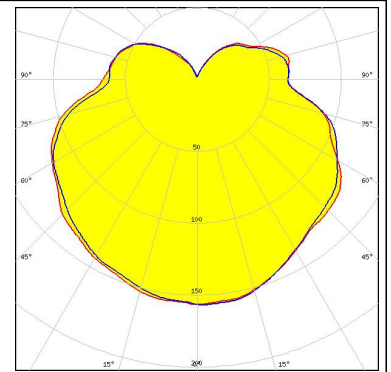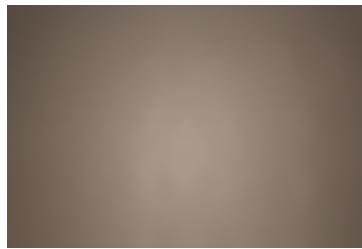

PHOTOMETRIC DATA (SIMULATED):




LED BXRA ES Rectangle
FWHM 256.0°
Efficiency %
Peak intensity 0.130 cd/lm
Required components:
BJB: 47.319.2040

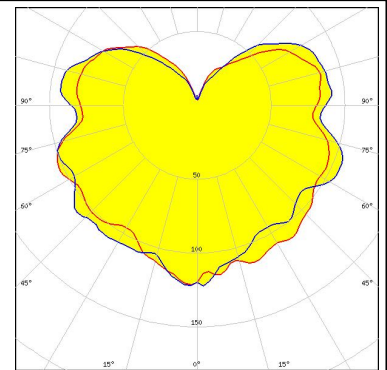


CITIZEN

LED CLL03x/CLU03x
FWHM 253.0°
Efficiency 97 %
Peak intensity 0.121 cd/lm
Required components:
BJB: 47.319.2021

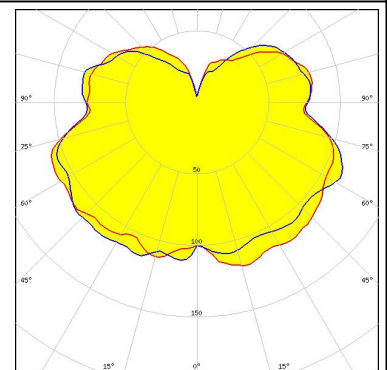


CITIZEN

LED CLL04x/CLU04x
FWHM 165.0°
Efficiency 97 %
Peak intensity 0.153 cd/lm
Required components:
BJB: 47.319.2030

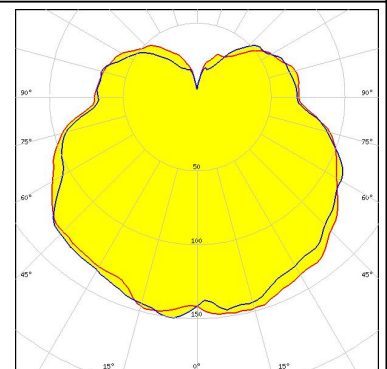

CITIZEN


LED CLU710/711
FWHM 268.0°
Efficiency 98 %
Peak intensity 0.113 cd/lm
Required components:
BJB: 47.319.2021

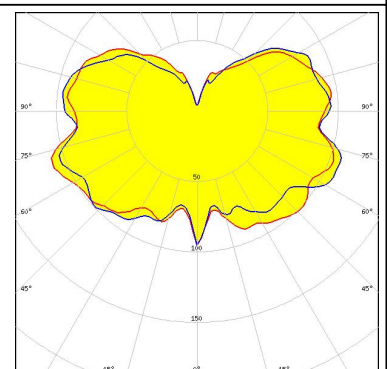

PHOTOMETRIC DATA (SIMULATED):


CITIZEN

LED CLU720/721
FWHM 265.0°
Efficiency %
Peak intensity 0.111 cd/lm
Required components:
BJB: 47.319.2021

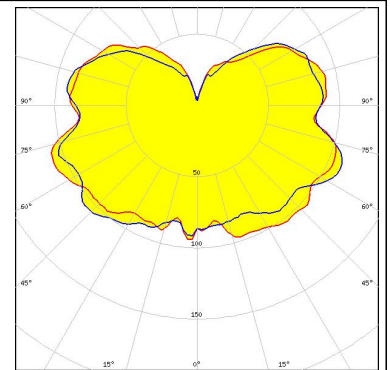


CITIZEN

LED CLU730/731
FWHM 264.0°
Efficiency %
Peak intensity 0.114 cd/lm
Required components:
BJB: 47.319.2030

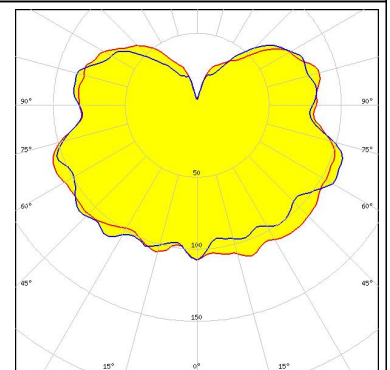


CREE

LED CXA/B 1816 & CXA/B 1820 & CXA 1850
FWHM 266.0°
Efficiency 95 %
Peak intensity 0.113 cd/lm
Required components:
BJB: 47.319.2131

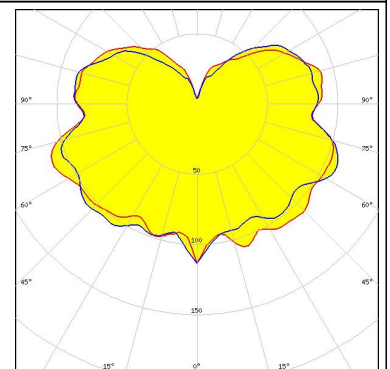

CREE


LED CXA/B 25xx
FWHM 240.0°
Efficiency 97 %
Peak intensity 0.130 cd/lm
Required components:
BJB: 47.319.2040

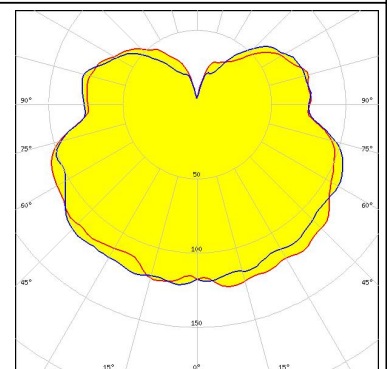


PHOTOMETRIC DATA (SIMULATED):




LED CXA/B 30xx
FWHM 242.0°
Efficiency 97 %
Peak intensity 0.131 cd/lm
Required components:
BJB: 47.319.2151

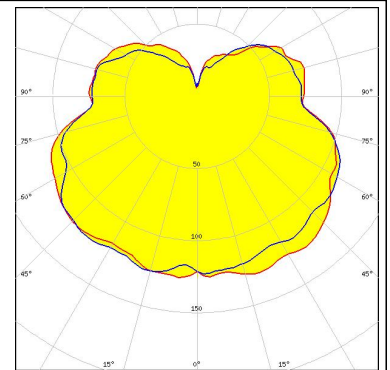


LED LUXEON CoB 1204/1205
FWHM 263.0°
Efficiency 97 %
Peak intensity 0.115 cd/lm
Required components:
BJB: 47.319.2011

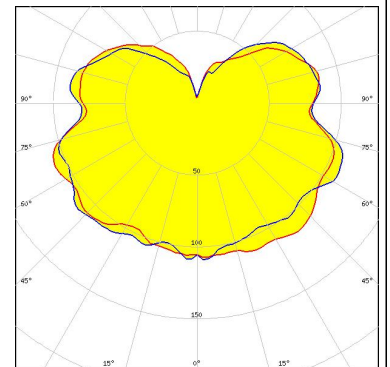

LED LUXEON CoB 1208
FWHM 253.0°
Efficiency 94 %
Peak intensity 0.110 cd/lm
Required components:
BJB: 47.319.2011

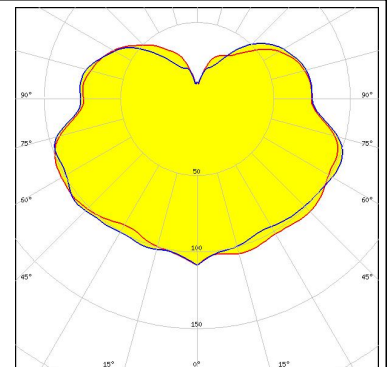


LED LUXEON CoB 1216/1812
FWHM 157.0°
Efficiency 93 %
Peak intensity 0.160 cd/lm
Required components:
A.A.G. STUCCHI: 8102/G2

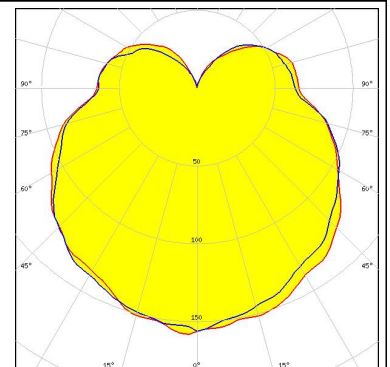

PHOTOMETRIC DATA (SIMULATED):


OSRAM
Opto Semiconductors

LED Soleriq S19
FWHM 246.0°
Efficiency 97 %
Peak intensity 0.130 cd/lm
Required components:
BJB: 47.319.2170

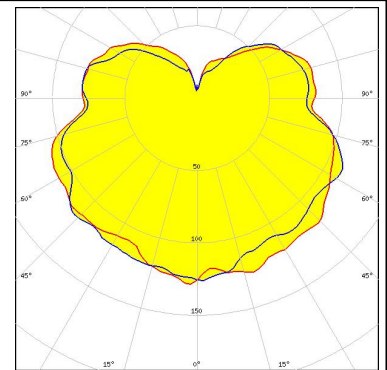


SEOL
SEOUL SEMICONDUCTOR

LED ZC12/18
FWHM 265.0°
Efficiency 97 %
Peak intensity 0.114 cd/lm
Required components:
BJB: 47.319.2021

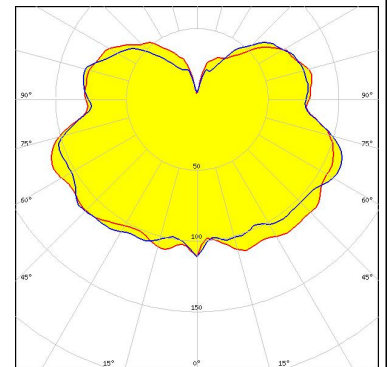


SEOL
SEOUL SEMICONDUCTOR

LED ZC25/40/60
FWHM 166.0°
Efficiency 97 %
Peak intensity 0.155 cd/lm
Required components:
BJB: 47.319.2030

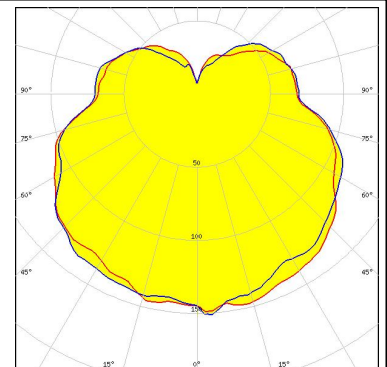

SHARP


LED Mega Zenigata (GW5DGC)
FWHM 257.0°
Efficiency 96 %
Peak intensity 0.118 cd/lm
Required components:
BJB: 47.319.2011

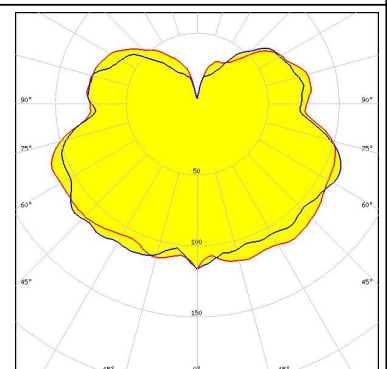

PHOTOMETRIC DATA (SIMULATED):

SHARP

LED Mega Zenigata (GW6DME)
FWHM 250.0°
Efficiency 96 %
Peak intensity 0.130 cd/lm
Required components:
BJB: 47.319.2011

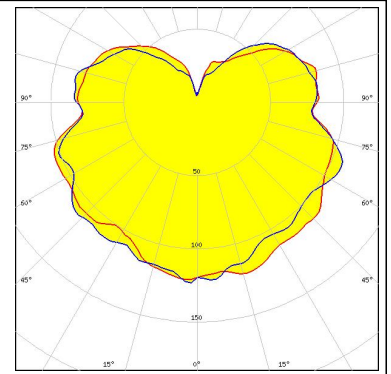

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

www.ledil.com/where_to_buy

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

www.ledil.com/where_to_buy